
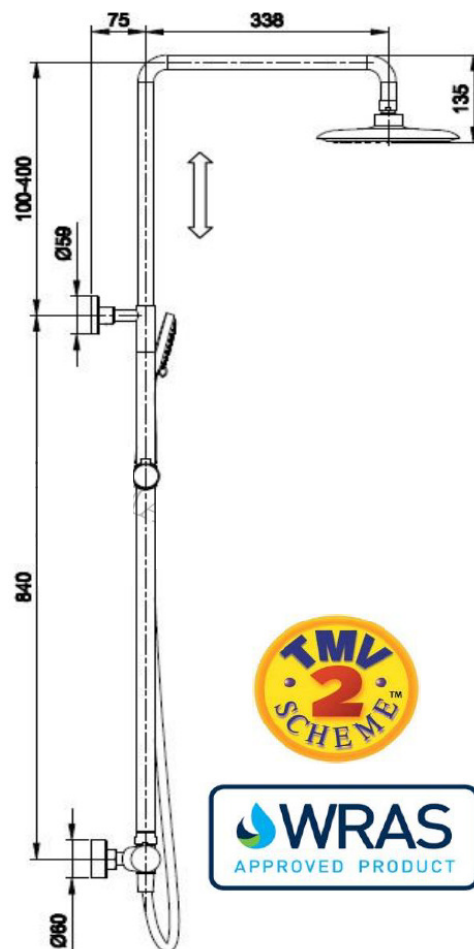


## TAPS & SHOWERING

<b>Construction</b>	Brass Body (CuZn38Pb18)
<b>Finishes</b>	Chrome plated to BS EN 248
<b>Product Type</b>	Contemporary
<b>Water Pressure</b>	Min. 0.5 bar, Max. 6.0 bar
<b>Plumbing Systems</b>	Suitable for all plumbing systems, preferably balanced.Min. supply pressure differential requirement is 5:1
<b>Standards</b>	Complies with BSEN 1111
<b>Certification</b>	WRAS, TMV2
<b>Cartridge</b>	Thermostatic
<b>Valve</b>	Integrate diverter ceramic valve
<b>Check valve</b>	0.5-10 gpm
<b>Fitting</b>	Easy Fit (15mm compression connection)
<b>Packaging</b>	96.5 x 46 x 56cm / carton (4 boxes / carton)
<b>Guarantee</b>	10 years against manufacturing faults (excluding serviceable parts).
<b>Additional Information</b>	<ol style="list-style-type: none"> <li>1.Temperature: Pre-set 38°C, with push button override to 48°C.</li> <li>2.Automatic shut off in the event of hot or cold water supply failure.</li> <li>3.Shower head : 250mm Brass head</li> <li>4.Shower handset : Chrome , 3 mode, ABS</li> <li>5. Shower hose : 1.5m Chrome</li> <li>6. Stainless steel adjustable riser rail</li> </ol>

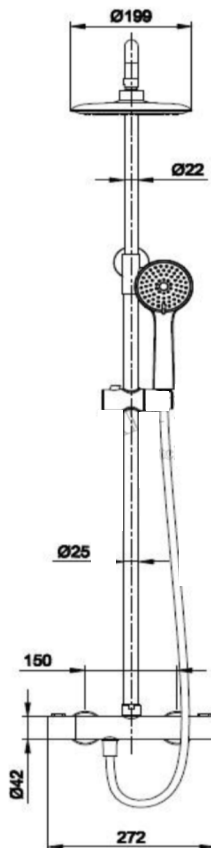

### Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
SH/619/C	-	3.2	-	8.0	11.5	-	-	20.2	-	-
Without Filter	4.7	7.0	-	11.0	12.6	15.8	18.2	22.9	26.5	29.8
Single Mode Handset	2.9	4.7	5.7	7.2	10.1	12.4	14.3	17.9	20.9	23.5

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029

EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK