SAGITTARIUS

TAPS & SHOWERING

ConstructionBrass Body (CuZn40Pb18)FinishesChrome plated to BS EN 248

Product Type Contemporary

Water Pressure Min. 0.2 bar, Max. 6.0 bar

Plumbing Systems Suitable for all plumbing systems

Standards Complies with BS5412, BS EN200

Certification Manufactured to comply with WRAS

Cartridge 1/4 Turn 3/4" Ceramic Disc Valves

Fitting M10 x 15mm flexible connection pipes

Packaging 42.5 x 30.5 x 66cm / carton (8 boxes / carton)


Guarantee 10 years against manufacturing faults (excluding serviceable parts).

FORME KITCHEN

FR/152/N

MIXER BRUSHED NICKEL



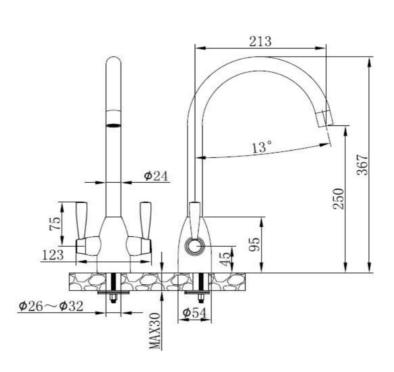

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
FR152	-	4.0	-	6.8	9.5	-	14.0	17.0	,	,

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice