

Saniwall Pro ^{UP}

Glass version



5 m
100 m



See page 10

PRODUCT BENEFITS

- The support frame and macerator solution for use with a wall-hung WC (not provided)
- Easy maintenance: double access to the product
- Perfectly integrated with an elegant and contemporary design for any bathroom décor
- Glass wall panel with flush plate included

CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40/100 mm

- Direct access to the basket in case of blockage due to improper use of the device without dismantling the device and without emptying the tank




Single blade cutter

PACK CONTAINS

Saniwall Pro Up, Grohe support frame, glass cladding, non-return valve, connectors

CURVE

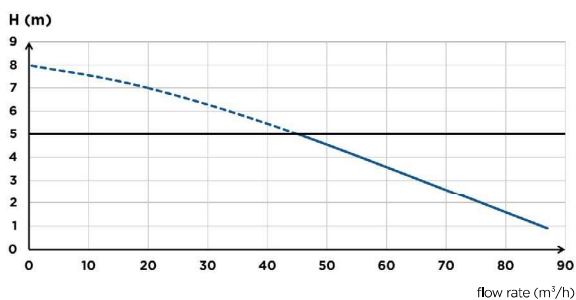

— recommended max height: 5 m

TECHNICAL FEATURES

Number of inlets	3
External inlet diameter	40/100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35°C
Min. shower tray height	130 mm
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	400 W
IP Rating	IP44
Electrical class	I
Noise level	47 dB(A)
Identification and logistics	
Gross weight	45 kg
EAN code	3308815074115
Product code	6110

DIMENSIONS

