# Caliente Horizontal




### EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Туре	Single	Double
Height	594	594
W/m at 75/65/20	782	1210
n-coefficients	1.25	1.26
Heated surface area (m²/m)	1.13	2.26
Weight (kg/m)	12.2	22.6
Water contents (I/m)	5.49	12.47
Wall to tap centre (mm)	38	70

#### WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

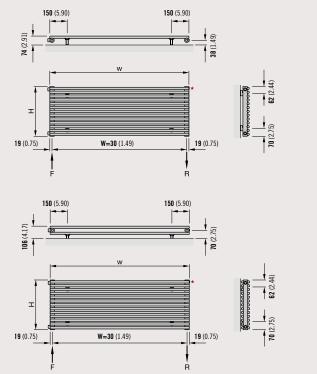

## PRODUCT SPECIFICATION

Tube diameter =  $\emptyset$ 20mm and  $\emptyset$ 38mm Steel thickness = 1.25mm for  $\emptyset$ 20; 1.4mm for  $\emptyset$ 38 Working pressure = 6 bar Operating temp =  $110^{\circ}$  max

★ Air vents

## CONNECTIONS

Each radiator comes with  $\frac{1}{2}$ " inlet connections as standard.