

Caliente Vertical


Stelrad Designer Series

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single		Double
Height	1200	1800	1800
W/m at 75/65/20	1470	2126	3212
n-coefficients	1.27	1.28	10.28
Heated surface area (m ² /m)	2.28	3.43	6.85
Weight (kg/m)	23.33	33.64	64.85
Water contents (l/m)	10.61	15.15	28.18
Wall to tap centre (mm)	38	38	70

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

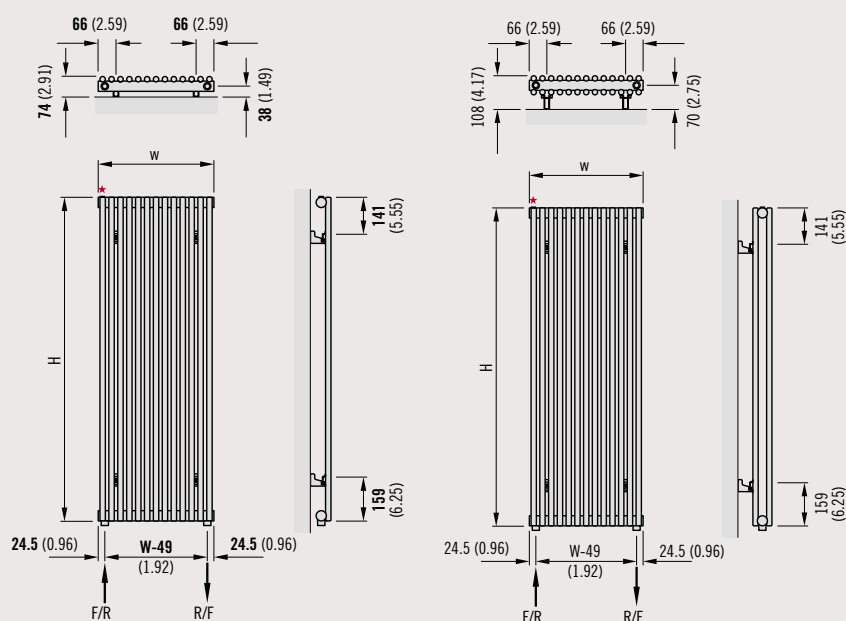

PRODUCT SPECIFICATION

Tube diameter = Ø20mm and Ø38mm
 Steel thickness = 1.25mm for Ø20 ; 1.4mm for Ø38
 Working pressure = 6 bar
 Operating temp = 110° max

★ Air vents

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.