


REFORM / APPEAR / DRIFT MIRRORS


Installation & care instructions

Please retain for future reference


REFORM
SLE540



APPEAR
SLE550



DRIFT
SLE560



ELECTRICAL SAFETY INSTRUCTIONS (Applicable to UK Installations only)

All fittings must be installed by a competent person, in accordance with current IEE wiring regulations. If in doubt consult a qualified electrician

IMPORTANT

Always switch off the electrical supply at the mains during installation and maintenance. It is recommended that the fuse is withdrawn or the circuit breaker is switched off for the necessary circuit before installation commences.

Fitting in Bathrooms is subject to the appropriate zone in accordance with IEE Regulations. This product is suitable for zone 2 and outside zones. IT IS NOT suitable for installation in Zone 0 or Zone 1. It is also not suitable for installation in saunas, steam rooms or shower cubicles. This product is only suitable for permanent installation. DO NOT connect to a trailing plug and socket outlet. Although this product has an Ingress Protection rating of IP44 it is only suitable for indoor use. Do not attach the product to surfaces that are damp or otherwise electrically conductive.

INSTALLATION CARE & SAFETY

Wear suitable eye protection when drilling. Take care when using power tools near water - the use of a residual current device (RCD) is advised. Beware of hidden cables or pipes. Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill from wandering.

IMPORTANT

The product must be installed with a minimum distance of 150mm between the infrared sensor and an adjacent wall or obstruction to ensure correct function of the sensor (see diagram below).

DO NOT strike glass components with hard or pointed items. DO NOT place very hot or very cold items against or in close proximity to glass surfaces unless an adequately thick insulation material is used to prevent such items coming in contact with the glass.

The nominal thickness of the mirror glass used in this product is 5mm and is 1m backed for safety. If the glass becomes chipped or broken replace immediately.

This product should be positioned well away from curtains and other fabrics. Never cover the mirror. This product is heated, we recommend that it is turned off after use and should never be left on for prolonged periods of time

This product could be dangerous and is only to be installed by a competent person.

CLEANING

It is recommended that the unit is cleaned with a soft, dry, non abrasive cloth when turned off. Never use cleaning agents or abrasive materials on any type of surface finish. Do not allow moisture to come into contact with the electrical components.

COMPLIANCE

This product complies with all relevant British and European safety standards:

WIRING

This product is manufactured to class I category and must have an earth connection.

COLOUR CODING:


L - Live = Brown

N - Neutral = Blue

⊕ - Earth = Green & Yellow

LIGHTS


To obtain a replacement LED lamp if faulty or broken contact customer services (see details at foot of page) quoting product code.

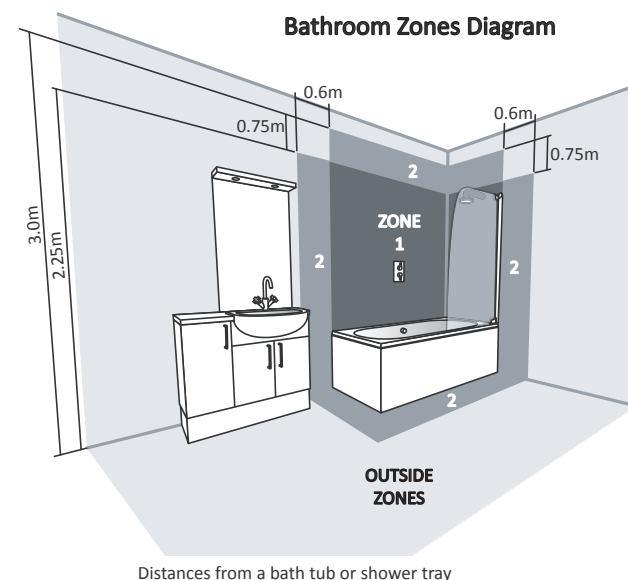

Distances from a bath tub or shower tray


①

Measure
Distance X

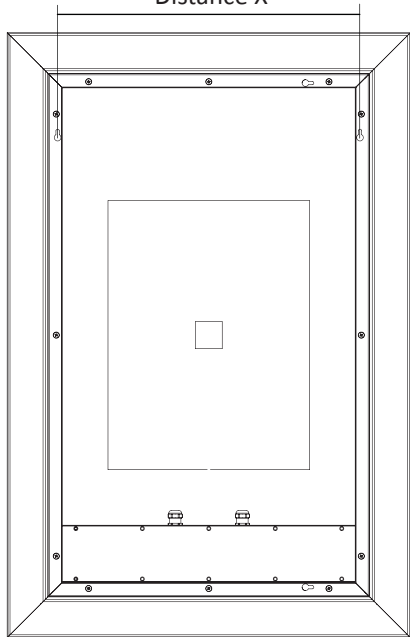


Portrait View

Measure
Distance X

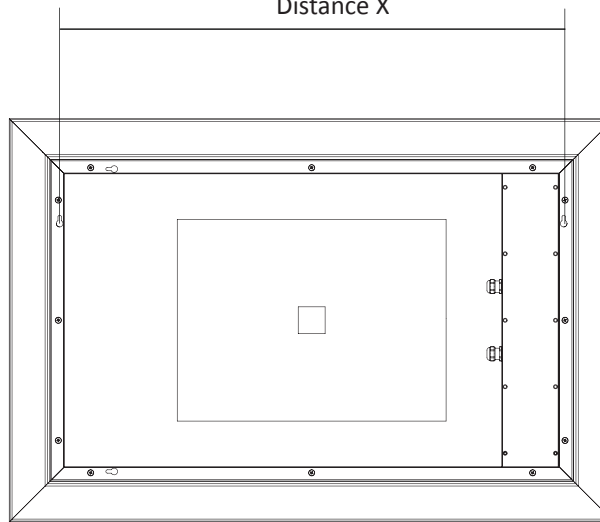

Landscape View

(Appear Shown for Illustrative Purposes)

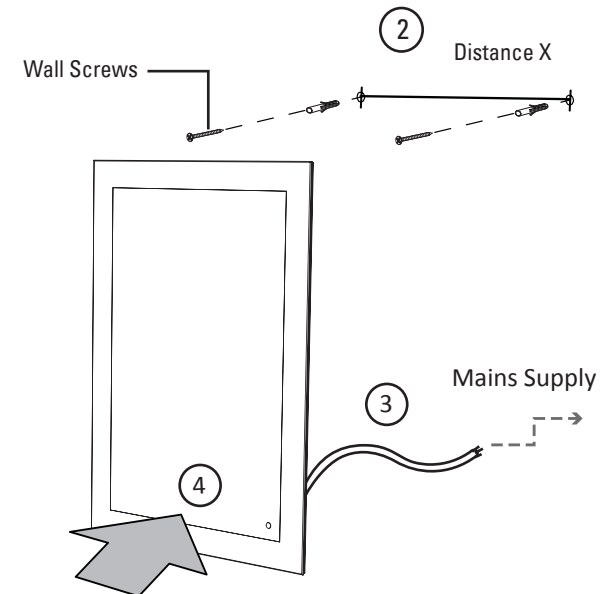

INSTALLATION PROCEDURE

The wall surface must be of suitable strength and construction.

1) Measure the distance (x) between the key-hole centres on the back of the mirror (mirror can be hung vertically or horizontally).

2) Draw a horizontal line on the wall approximately 146mm lower than the desired position of the top edge of the mirror.

Mark the drill positions on the horizontal line using dimension (x) taken from step 1. Ensure the hole positions are horizontal by using a spirit level. (Step 2)

Accurately mark the 2 hole positions with a pencil, drill and fit the wall plugs.

NOTE: The wall plugs supplied are only suitable for solid stone / brick walls. For plasterboard walls use specialist wall plugs.


3) The next step is to make the electrical connection from the mirror to the mains supply. Use the connection wire found at the rear of the mirror to make the necessary connections in accordance with the current IEE regulations. A second person will need to hold the mirror in place whilst electrical connections are made.

THIS PRODUCT IS MANUFACTURED TO CLASS I
CATEGORY AND MUST HAVE AN EARTH CONNECTION.

Colour Coding:

L - Live = Brown
N - Neutral = Blue
⊕ - Earth = Green & Yellow

Strip wires to a suitable length. DO NOT connect to a plug & socket outlet.



! IF IN DOUBT CONSULT YOUR ELECTRICIAN !

4) Insert the wall screws supplied into the wall plugs. Leave approximately 5-10mm of the screw standing proud of the wall. Mount the mirror onto the screws fitted to the wall. Ensure mirror is securely mounted.

To remove the mirror, the mirror should first be lifted and then pulled away from the wall.

OPERATING INSTRUCTIONS

Lighting is turned on / off by waving a hand past the IR sensor on the mirror glass, which is positioned in the bottom right when hung portrait and bottom left when hung landscape. The heated pad is on when the light is on. DO NOT leave on for prolonged periods of time.