


X60 bidet mono

complete with 1/4 turn ceramic cartridge & flexible tails
suitable for both high & low pressure applications



X60 Bidet Mono Mixer Inc Click Clack Waste

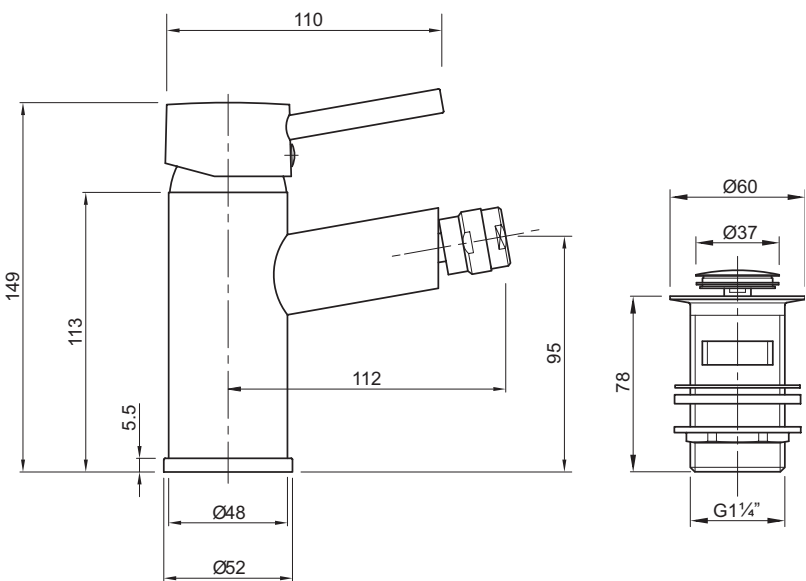

to specify/order:

Please use the product reference
shown below.

X60 bidet mono

X60 Bidet Mono Mixer
Inc Click Clack Waste

X605135CP

finish

Chrome plated CP.

approvals

WRAS Approved

standards

Chrome plated to BS EN248

system requirements

Can be installed on any system

recommended operating pressure

Minimum operating pressure 0.2 bar.

Maximum operating pressure 5 bar.

note

Maximum surface thickness to fit tap
is 44mm. Easy fit clicker waste (slotted)
included. Attached using 'C' plate fixing
kit included.



Deck Mounted Bidet Mixer – X605135CP

Flow Rate (Litres per minute)	0.2 Bar	0.5 Bar	1.0 Bar	2.0 Bar	3.0 Bar	5.0 Bar
Standard Mixed	4.3	7.3	10.6	15.0	19.0	24.3

All measurements shown are in millimetres. Drawing sizes
are not to scale.



Hotels



Commercial



Residential

Twyford
Geberit Group