


sola infra red spout

sensor underside of tap for hygienic non-touch operation
automatically stops after 70 seconds maximum
battery or mains powered



Sola wall mounted infra red spout, square

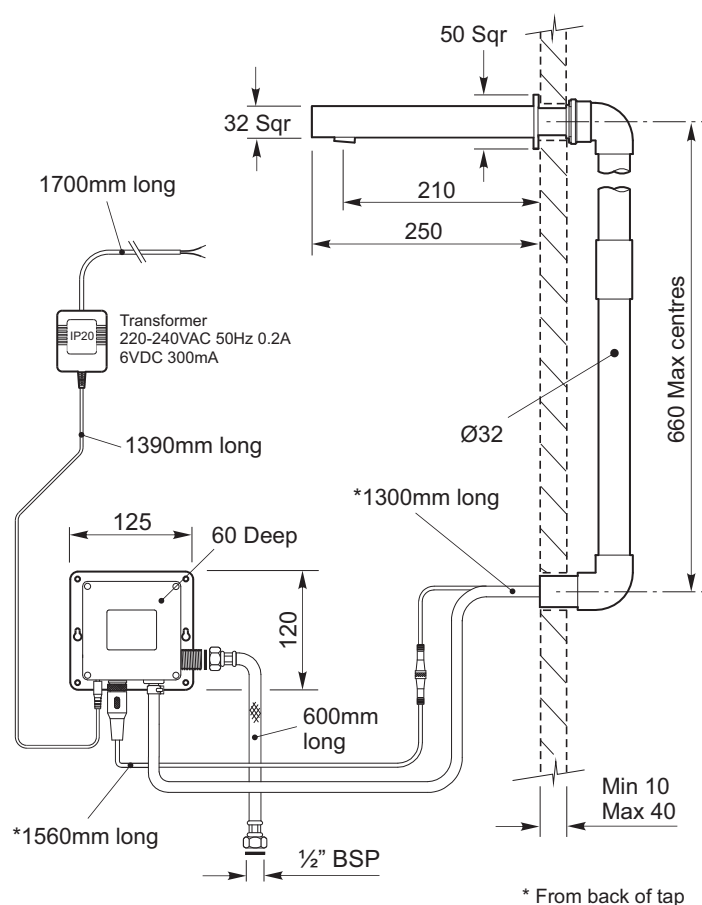

to specify/order:

Please use the product reference shown below.

wall mounted infra red spout

Square **SF1250CP**

thermostatic mixing valve

Single applications 15mm **SF1037XX**

finish

Chrome plated CP.

approvals

TMV2 & TMV3 Approved when
installed with SF1037XX
BREEAM compliant
WRAS Approved



recommended operating pressure

Min. operating pressure 0.5 bar
Maximum operating pressure 5.0 bar

power

Mains
Transformer 220-240V AC 50Hz 0.2A

battery

6V DC (4x AA, provided)

note

Flow - up to 70 seconds



Wall Mounted Infra-Red Spout, Square – SF1250CP

Flow Rate Max (Ltrs/Min)	0.5 Bar	1 Bar	1.5 Bar	2.0 Bar	3.0 Bar	5.0 Bar
With Flow Limiter fitted	4.3	3.8	3.8	3.8	3.8	3.8

All measurements shown are in millimeters. Drawing sizes are not to scale.



Commercial

Twyford
Geberit Group
277