


X50 basin mono mixer - mini

complete with ceramic cartridge & flexible tails
suitable for both high & low pressure applications
flow regulator can be added to control water usage & comply with BREEAM



X50 Basin Mono Mixer - Mini Inc Click Clack Waste

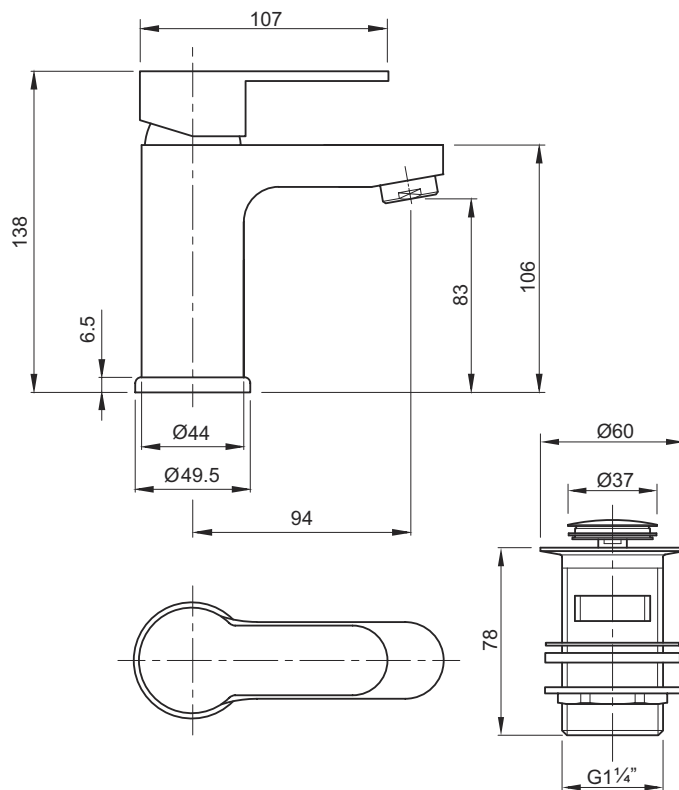

to specify/order:

Please use the product reference shown below.

X50 basin mono mixer - mini

X50 Basin Mono Mixer - Mini
Inc Click Clack Waste **X505122CP**
7.5 LPM Flow regulator **XS9075XX**

finish

Chrome plated CP.

approvals

WRAS Approved

standards

Chrome plated to BS EN248

system requirements

Can be installed on any system

recommended operating pressure

Minimum operating pressure 0.2 bar.

Maximum operating pressure 5 bar.

note

Maximum surface thickness to fit tap is 44mm.

Easy fit clicker waste (slotted) included.

Attached using 'C' plate fixing kit included.



Deck Mounted Mini Basin Mixer – X505122CP

Flow Rate (Litres per minute)	0.2 Bar	0.5 Bar	1.0 Bar	2.0 Bar	3.0 Bar	5.0 Bar
Standard Mixed	5.0	8.6	13.1	18.7	22.5	28.5
Flow Limiter Fitted (Part No:XS9075XX)	2.10	3.80	5.40	6.90	7.50	7.50

All measurements shown are in millimetres. Drawing sizes are not to scale.



Hotels



Commercial



Residential

Twyford
Geberit Group