


sola 1/2" non-concussive taps

complete with spray mixer & flow straightener
water saving operation
complete with flow restrictor to meet BREEAM



Non-concussive tap (pair)

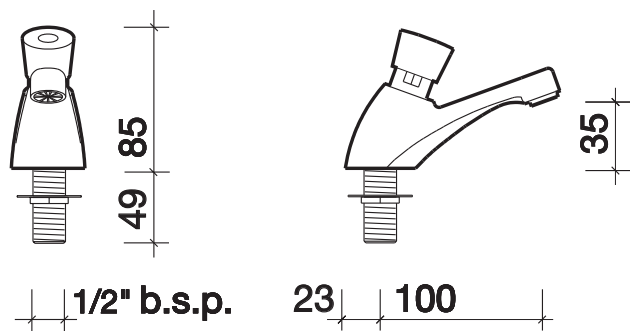

to specify/order:

Please use the product reference shown below.

1/2" non-concussive tap

Single, hot and cold indice **SF2151CP**
Pair **SF2152CP**

finish

Chrome plated CP.

approvals

BSEN816
WRAS Approved

recommended operating pressure

Minimum operating pressure 0.5 bar.
Maximum operating pressure 10 bar.

note

Suitable for tap hole sizes 25-32mm.
At an inlet pressure of 1 bar taps give approximately 15 seconds (+ or - 3 seconds) of flow after button is pressed.



| Flow rates for SF2151CP and SF2152CP | | | | | | | | | | | | |
|--------------------------------------|-----|-----|-----|-----|-----|-----|------|------|------|------|-----|-----|
| Pressure (bar) | 0.1 | 0.2 | 0.3 | 0.4 | 0.5 | 0.6 | 0.8 | 1 | 2 | 3 | 4 | 5 |
| With restrictor (l/min) for BREEAM | 1.8 | 2.4 | 2.9 | 3.4 | 3.8 | 4.2 | 4.8 | 5.3 | 6.5 | 7.4 | 7.9 | 8.3 |
| Without restrictor (l/min) | 3.8 | 5.3 | 6.7 | 7.6 | 8.5 | 9.3 | 10.8 | 12.0 | 17.0 | 20.4 | N/A | N/A |

All measurements shown are in millimetres. Drawing sizes are not to scale.

