


# sola non concussive bib tap

back inlet non concussive bib tap  
water saving operation  
complete with flow restrictor to meet with BREEAM



Non-concussive bib tap

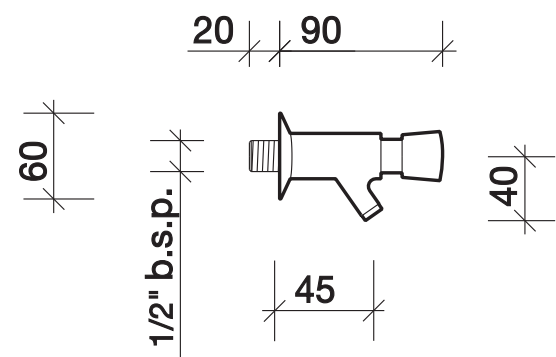

### to specify/order:

Please use the product reference shown below.

### non-concussive bib tap

Single **SF2153CP**

### plate - for bib taps:

77mm projection, single **SF2705CP**

115mm projection, single **SF2706CP**

### finish

Chrome plated CP.

### approvals

WRAS Approved

### recommended operating pressure

Minimum operating pressure 0.2 bar.

Maximum operating static pressure 10 bar.

Flow straightener.

### note

At an inlet pressure of 1 bar taps give approximately 10 seconds (+ or - 3 seconds) of flow after button is pressed.



Flow rates SF2153CP											
Pressure (bar)	0.1	0.2	0.4	0.6	0.8	1.0	2.0	3.0	4.0	5.0	
With restrictor (l/min)	2	3	4	5	6	6	7	7	7.5	7.5	
Without restrictor (l/min)	4	6	9	11	13	14.5	21	25.5	N/A	N/A	

All measurements shown are in millimetres. Drawing sizes are not to scale.



Hotels



Education



Commercial



Less Able

Twyford

Geberit Group

260