
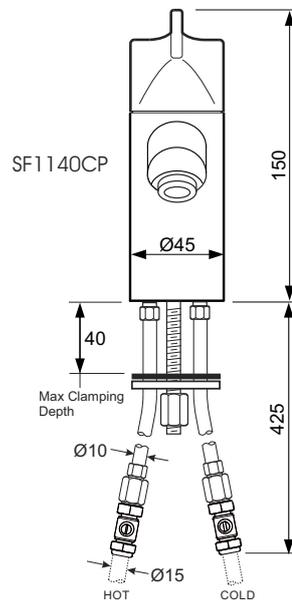
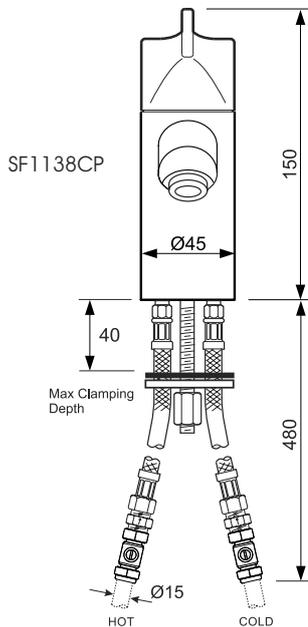


sola thermostatic basin mixer with fixed spout

self-draining spout
open hole outlet
flexible or copper hoses as standard

Sola Thermostatic Basin Mixer Tap



to specify/order:

Please use the product reference shown below.

sola thermostatic basin mixer tap
*Including flexible hoses and service valve **SF1138CP**

sola thermostatic basin mixer tap
Including copper tails and service valve **SF1140CP**

finish

Chrome plated CP.

approvals

BREEAM compliant.
TMV3 Approved
*WRAS Approved



recommended operating pressure

Maximum inlet pressure Static 12bar

Maximum Recommended operating pressure 5bar

Minimum Operating Pressure 0.2bar

Maximum Inlet temperature 85°C

Minimum Inlet Temperature 10°C

Maximum un-balanced pressure ratio (without flow regulator) 5:1

*Minimum Temperature differential 10°C

Pre-set Factory outlet temperature 38°C

*Temperature difference between inlet temperature (Hot or Cold) and outlet temperature to ensure failsafe operation.



Sola Thermostatic Basin Mixer Tap - SF1138CP/SF1140CP

Flow Rate (Litres per minute)	0.5 Bar	1 Bar	2 Bar	3 Bar	4 Bar	5 Bar
With Flow Regulators Fitted	2.7	3.1	3.7	3.8	4.1	4.2

All measurements shown are in millimetres. Drawing sizes are not to scale.



Hotels



Healthcare



Education



Commercial



Less Able

Twyford
Geberit Group