


sola infra red spout

sensor underside of tap for hygienic non-touch operation
 automatically stops after 70 seconds maximum
 battery or mains powered



Sola wall mounted infra red spout, square

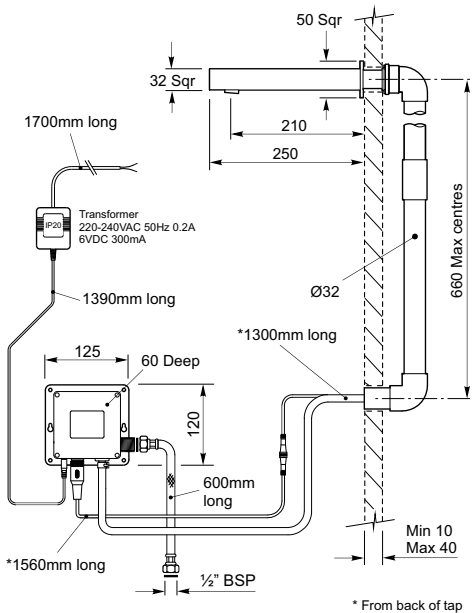

to specify/order:

Please use the product reference shown below.

wall mounted infra red spout

Square

SF1250CP

thermostatic mixing valve

Single applications 15mm

SF1037XX

finish

Chrome plated CP.

approvals

TMV2 & TMV3 Approved when
 installed with SF1037XX

BREEAM compliant



recommended operating pressure

Min. operating pressure 0.5 bar
 Maximum operating pressure 5.0 bar

power

Mains

Transformer 220-240V AC 50Hz 0.2A

battery

6V DC (4x AA, provided)

note

Flow - up to 70 seconds

Wall Mounted Infra-Red Spout, Square – SF1250CP

Flow Rate Max (Ltrs/Min)	0.5 Bar	1 Bar	1.5 Bar	2.0 Bar	3.0 Bar	5.0 Bar
With Flow Limiter fitted	4.3	3.8	3.8	3.8	3.8	3.8

All measurements shown are in millimetres.
 Drawing sizes are not to scale.



Commercial

Twyford
 Geberit Group