

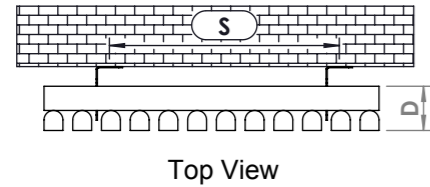
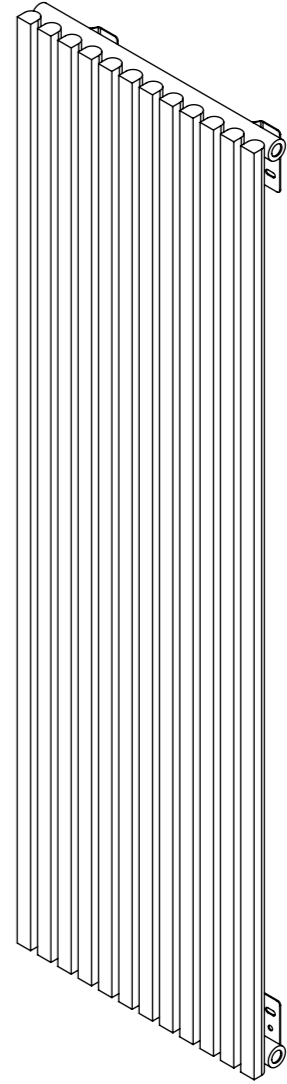
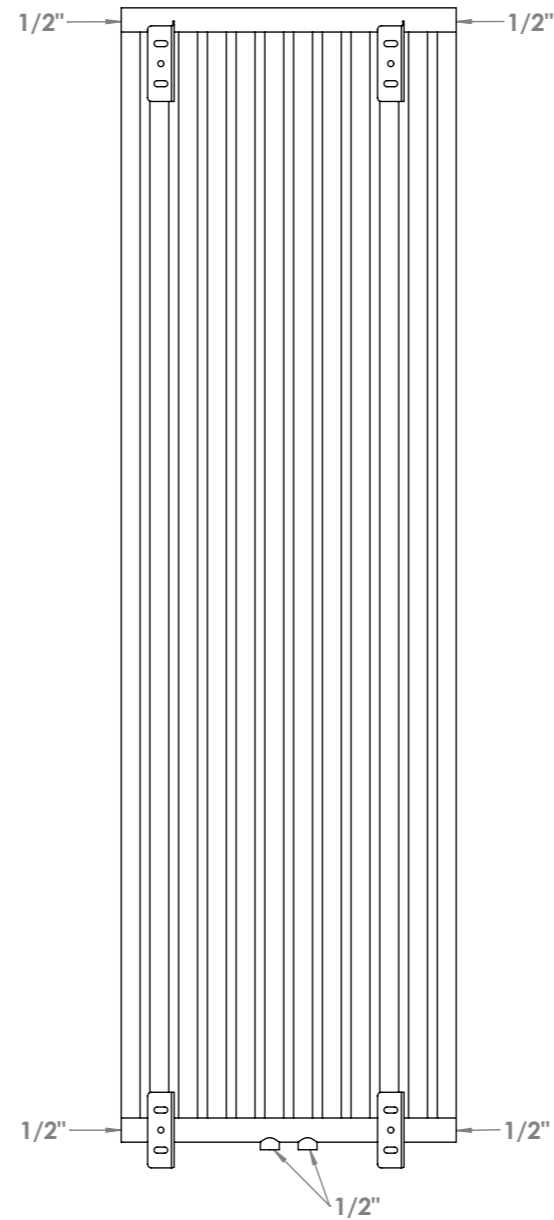
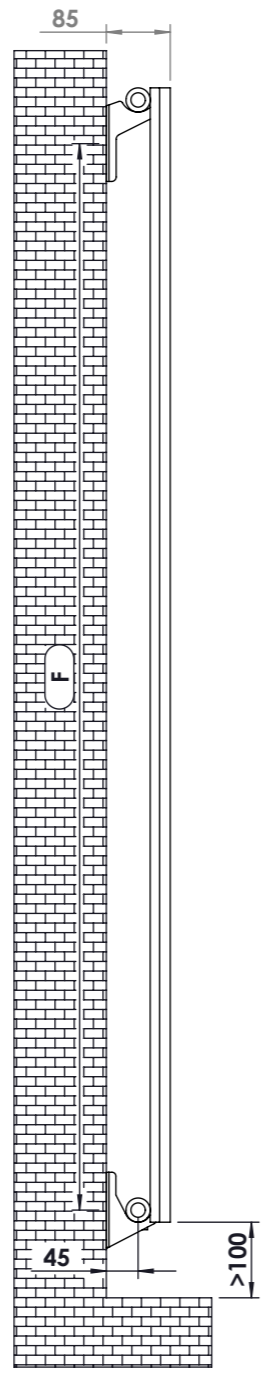



KLON S (Klon Single)

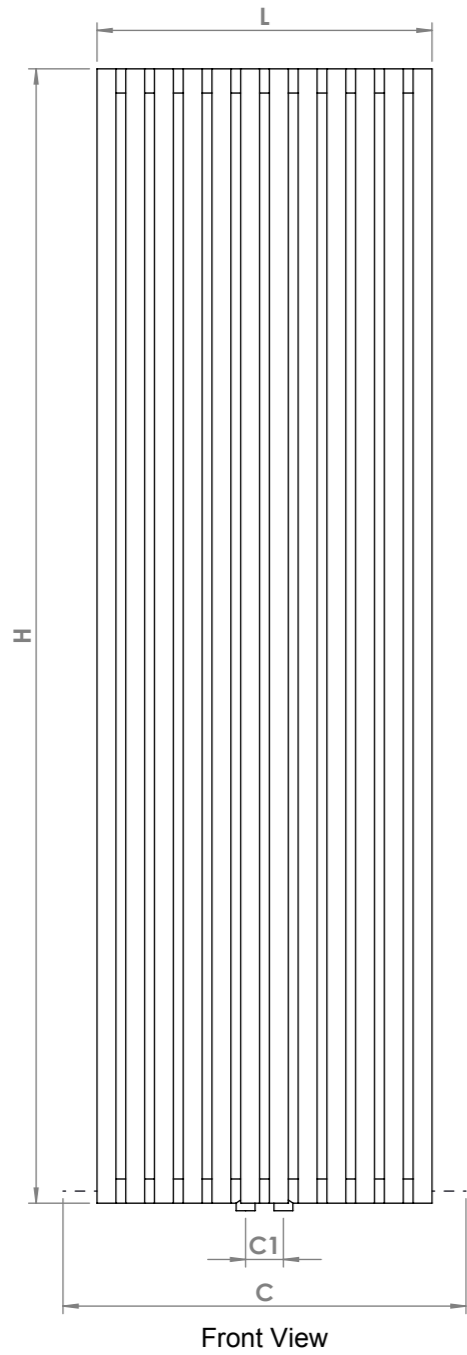

Installation Accessories:

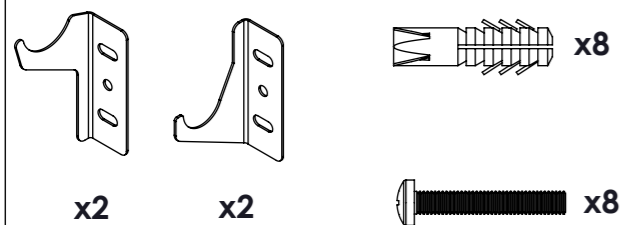

Plumbing Position: Vertical

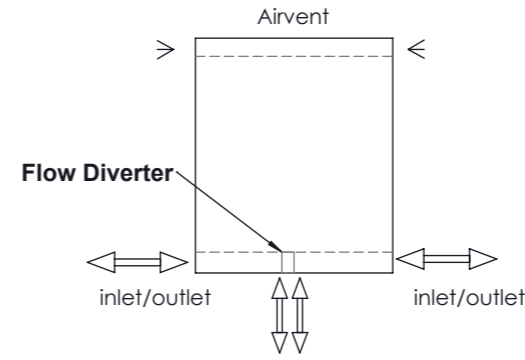

When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

Vertical mount
All Dimensions are in mm
Max. Working Pressure: 10 Bar
Max. Working Temperature: 95° C
Inlet / Outlet : 1/2" BSP
Fuel : E/H/D

PRODUCT CODE	Height	Length	Depth	Pipe Centres	Bracket Centres	
	H mm	L mm	D mm	C1-C mm	F mm	S mm
KS1506	1500	215	58	50-305	1410	75
KS1510	1500	367	58	50-457	1410	230
KS1512	1500	443	58	50-533	1410	305
KS1806	1800	215	58	50-305	1710	75
KS1810	1800	367	58	50-457	1710	230
KS1816	1800	595	58	50-685	1710	455
KS2006	2000	215	58	50-305	1910	75
KS2014	2000	519	58	50-609	1910	380