



MANUAL




Bright Quadrant/Offset

Installation Instructions
 Quadrant/Offset Quadrant
 Adjustment range: (-20/0mm) x (-20/0mm) x 1950mm


Mounting Preparation

After opening the packaging, read the instructions carefully. Check whether all parts are present and there is no sign of shipping damage. If you find any problem, please contact your retailer directly.


Necessary tools:



Spirit level



Electric drill



Crosstip screw driver



Pencil




Rubber hammer




knife




ruler




silicon sealant

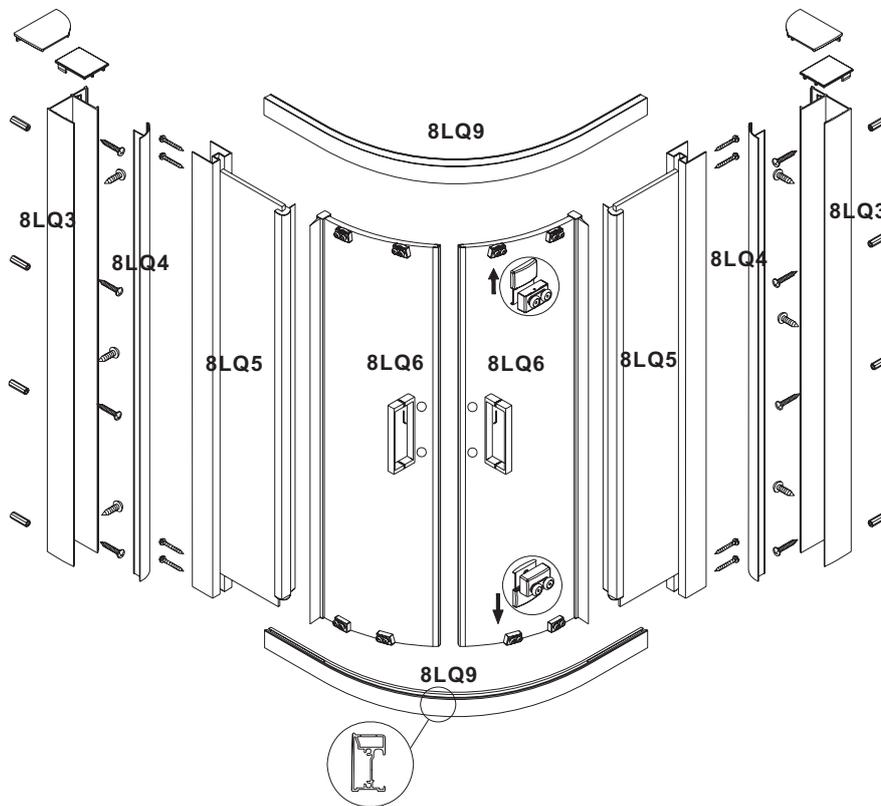


8LQ1  8x	8LQ2 ST4X30  16x	8LQ7  2x	8LQ8  1x
8LQ10 ST4X12  6x	8LQ11  2x	8LQ12 8#  1x	

1

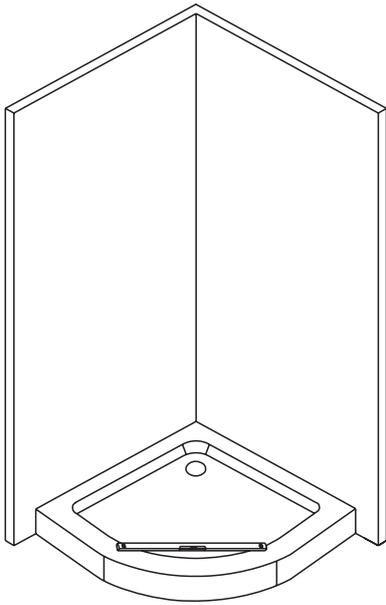


1. If the quadrant is placed onto a tray, first take a spirit level to check whether the tray is placed horizontal. In case the quadrant is installed directly onto the floor, please proceed with step 2.
Tray or marbles need to install on level, wall profile need to install vertical, otherwise the door could not be installed well.

2

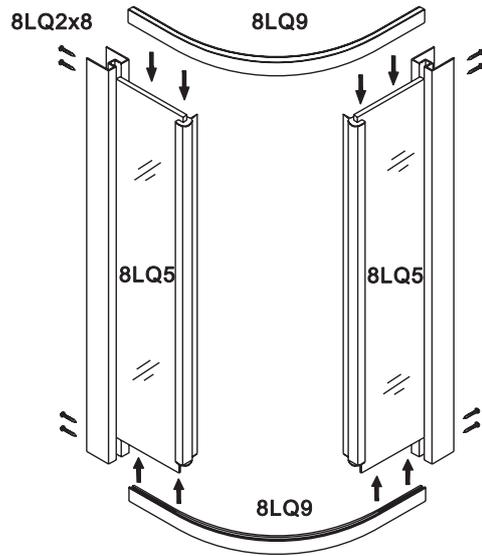



2. Mount rail profile 8LQ9 on top and bottom with fixing panel 8LQ5 with screw St4x30 8LQ2 2pcs each on each joint.

3

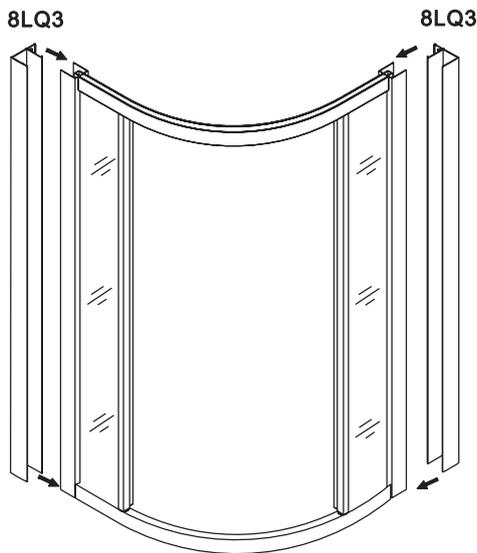


3. Put the wall profile 8LQ3 2pcs on the 2 ends of frame.

4

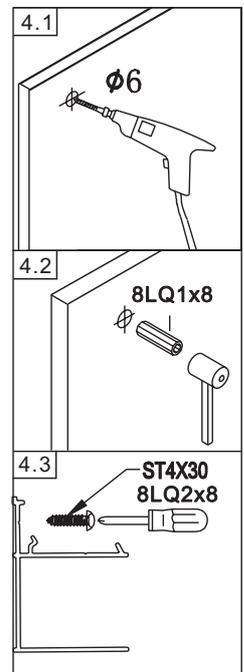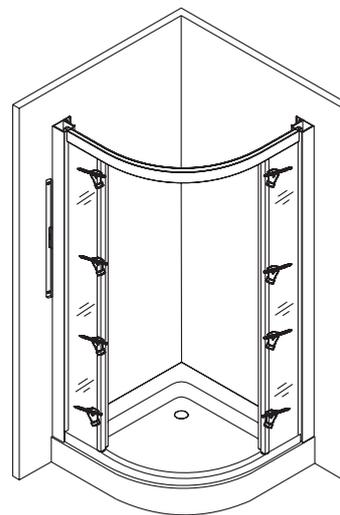


4. Put the frame on the tray and adjust the wall profile and frame to let the rail profile on the middle of tray edge. Please make sure wall profile is vertical. Mark the hole position on wall profile. Drill holes accordingly. Put wall plugs 8LQ1 8x into the holes and fasten wall profiles on the wall by screw St4x30 8LQ2 8x.

5

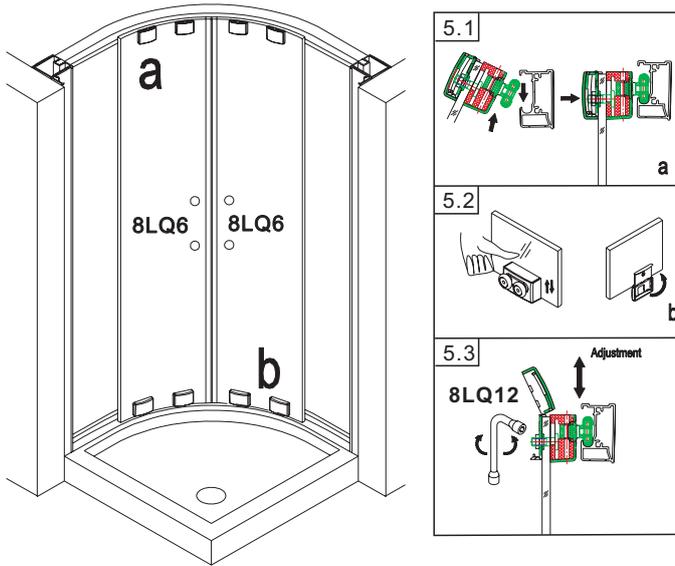


5. Put sliding panel 8LQ6 on the rail profile. Firstly, Put the top roller into rail profile. Secondly, press bottom roller and put it into rail profile. After put sliding panel on the rail profile, please adjust the rollers to make sure sliding panel in vertical position. It will make sure sliding door has smooth sliding effect and good cooperation for magnetic strip seal and magnetic profile.

6

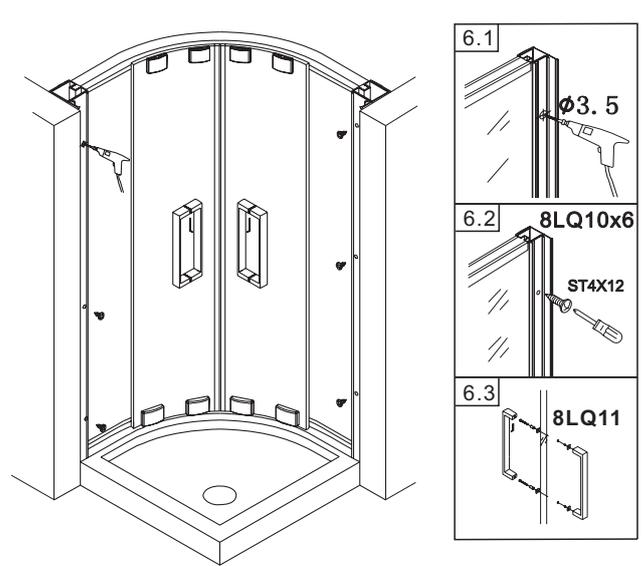


6. Drill holes on vertical profile and fasten vertical profile and wall profile by screw 8LQ10 6x. Mount the handle 8LQ11 on sliding panel.

7

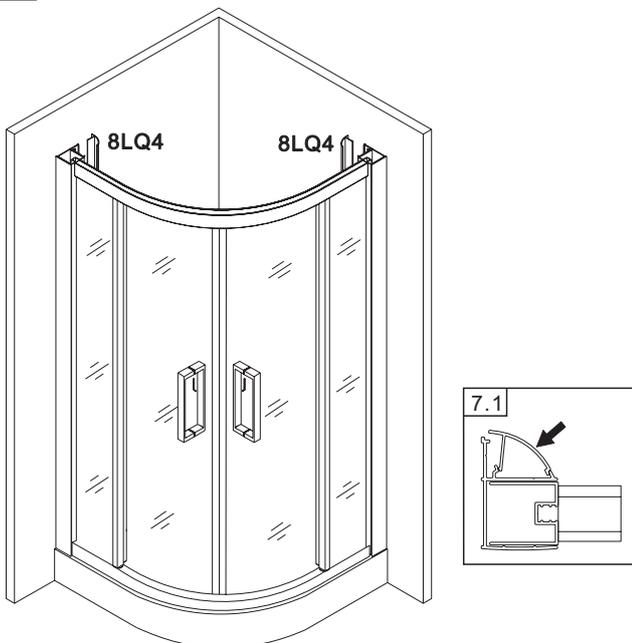

7. Cover wall profile with decorative profile 8LQ4 2pcs.

8

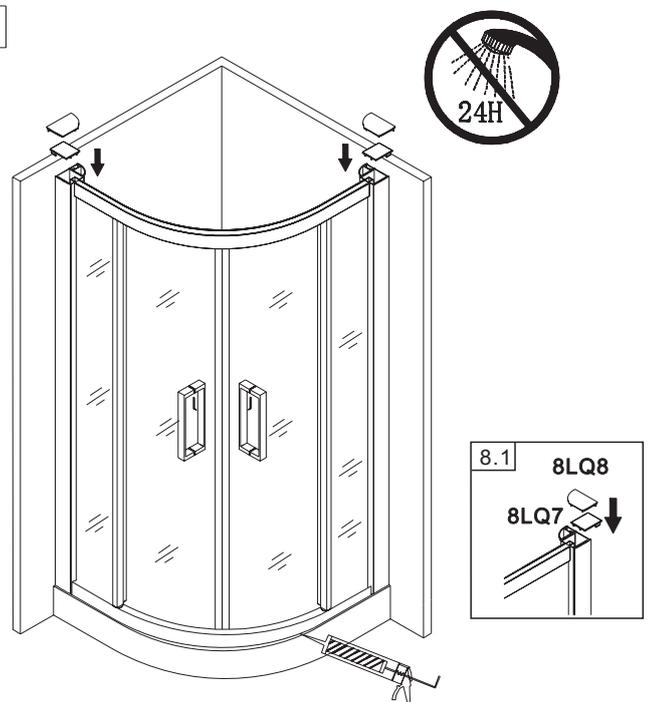

8. Put plastic cover 8LQ7 and 8LQ8 on the top of profiles. Sealant shower cabin on outside where next to wall and tray/floor. Please do not use your shower enclosure within 24 hours after assembly. Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.