INSTALLATION INSTRUCTIONS MIRROR CABINET




Dimensions:

600x700x150mm 1000x700x150mm 800x700x150mm 1200x700x150mm

Pre-mounted:

- Shaver socket
- Switch

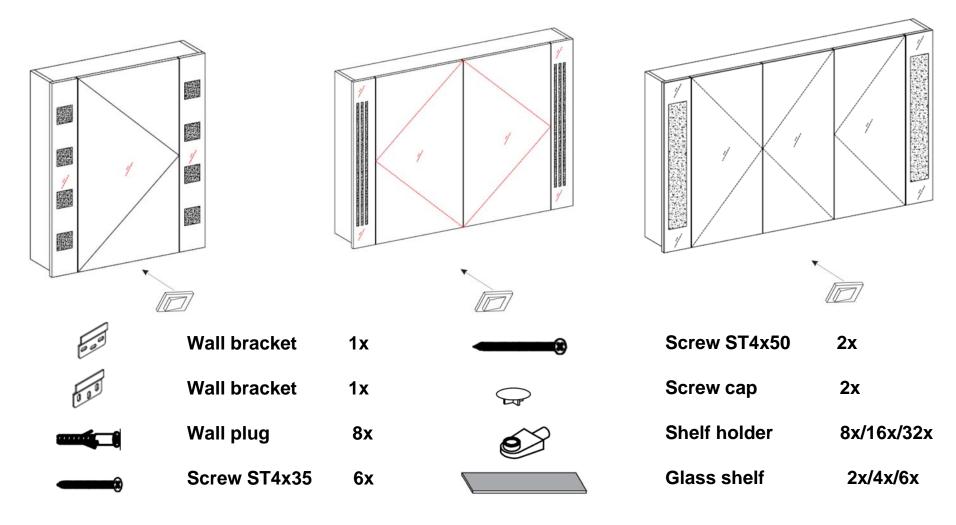

Please check the delivery for damages or missing parts upon receipt. Do not use damaged parts or accessories!

Warning:

All fittings must be installed by a skilled professional in accordance with current IEE wiring regulations. If in doubt, consult a qualified electrician.

Switch off the electrical supply at the mains BEFORE installation and maintenance.

NOT suitable for Saunas, Steam Rooms or Shower Cubicles. DO NOT connect to a plug and socket outlet.

Rated IP44 and suitable for indoor use only. DO NOT fix to damp or conductive surfaces and install well away from curtains and fabrics. Never cover the mirror. Ensure you switch off after use. Do not leave on for prolonged periods of time.

Please note: Over heating is usually the result of faulty installation and may lead to charring of components.

IMPORTANT—BEFORE YOU BEGIN!


Inspect the product immediately upon receipt for transit damage, missing parts or manufacturing faults.

Handle the product with care and protect against knocks to all sides and edges of the glass.

Fixings supplied are for use in solid walls. Hollow or stud walls will require specialist fixings available from your hardware supplier. Make sure that you have all the tools you need to complete the job (see below).


Tools Required

Electric drill, Pencil, Spirit level, Cross tip screw driver, Tape measure

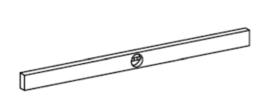











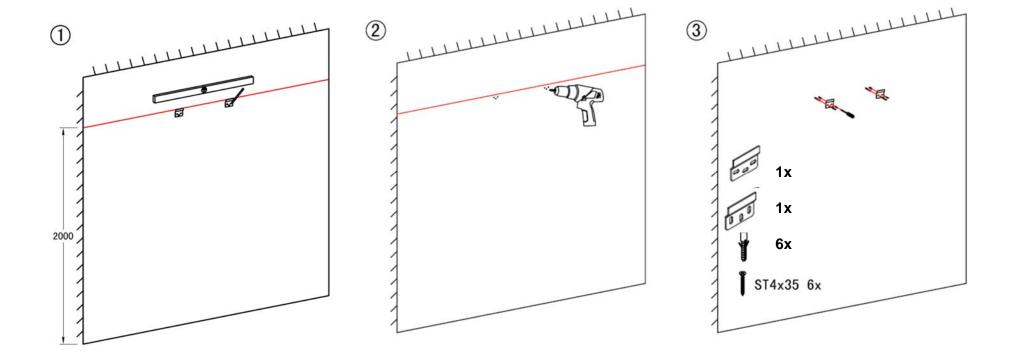

- Remove the packaging and be especially careful with the cabinet doors and the shelves.
- Determine the position where the cabinet shall be mounted.
- Use the spirit level to properly align the wall bracket.

- Mark the hole positions on the wall and drill holes according to marks.
- Insert the wall plugs into the holes.
- Fix wall bracket with provided ST4x35 screws.

1-door cabinet

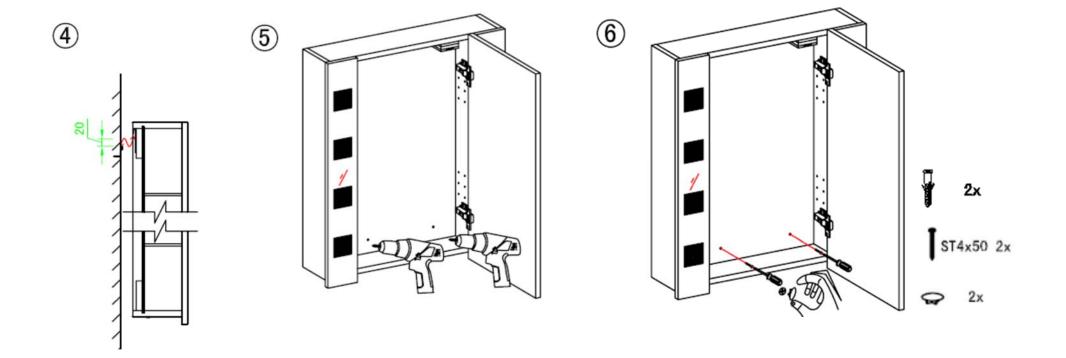


- Hang the mirror cabinet on the wall bracket.
- Open the door and mark the location of the boreholes on the wall, then take off the cabinet.
- Drill the marked holes and insert wall plugs.

• Fix the cabinet on the wall with provided screws ST4x50 and caps.

Please note:

The cabinet should be fixed on the wall through the drilled hole on the back panel.

2-door cabinet

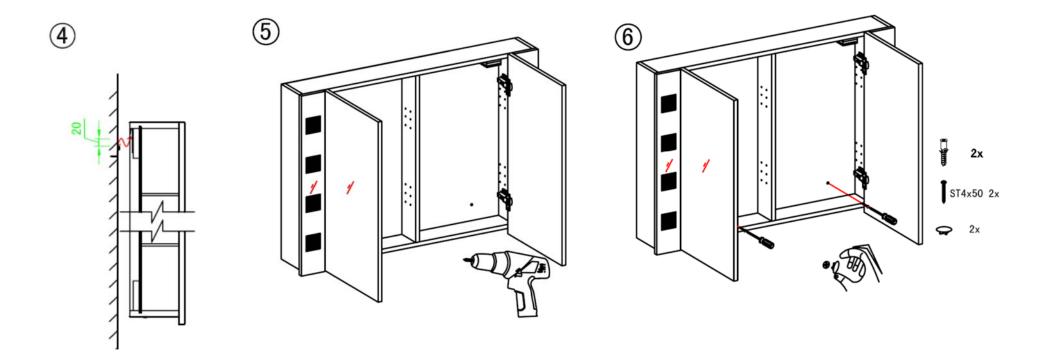


- Hang the mirror cabinet on the wall bracket.
- Open the door and mark the location of the boreholes on the wall, then take off the cabinet.
- Drill the marked holes and insert wall plugs.

• Fix the cabinet on the wall with provided screws ST4x50 and caps.

Please note:

The cabinet should be fixed on the wall through the drilled hole on the back panel.

3-door cabinet

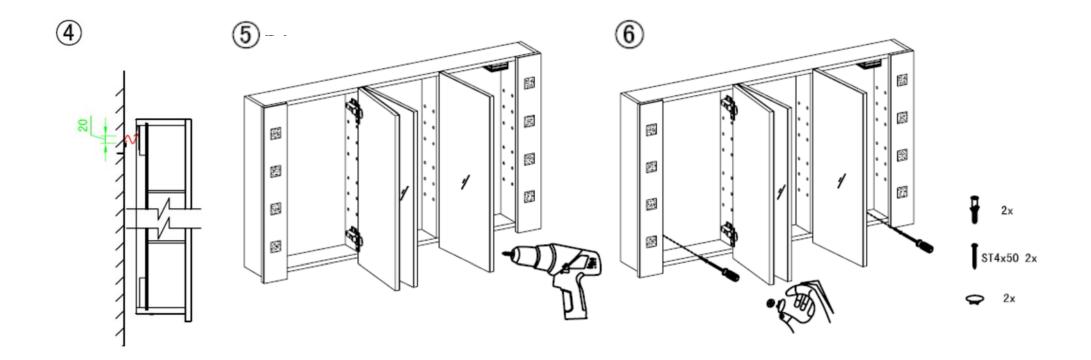

- Hang the mirror cabinet on the wall bracket.
- Open the door and mark the location of the boreholes on the wall, then take off the cabinet.
- Drill the marked holes and insert wall plugs.


• Fix the cabinet on the wall with provided screws ST4x50 and caps.


Please note:


The cabinet should be fixed on the wall through the drilled hole on the back panel.


1-door cabinet


7

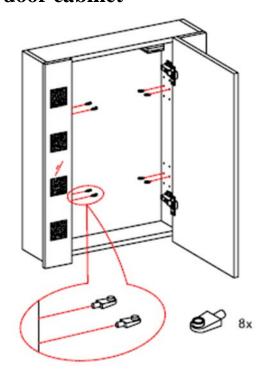




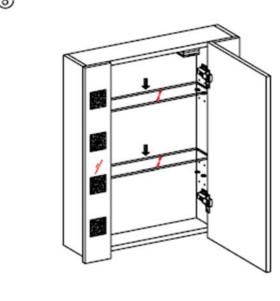

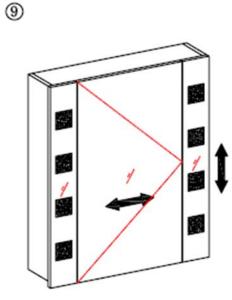




- Place glass shelves.
- If the door is not aligned correctly, adjust it with the screws.

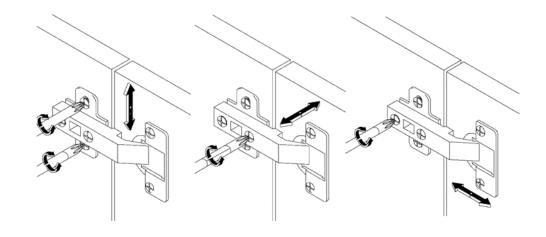


2-door cabinet


the screws.

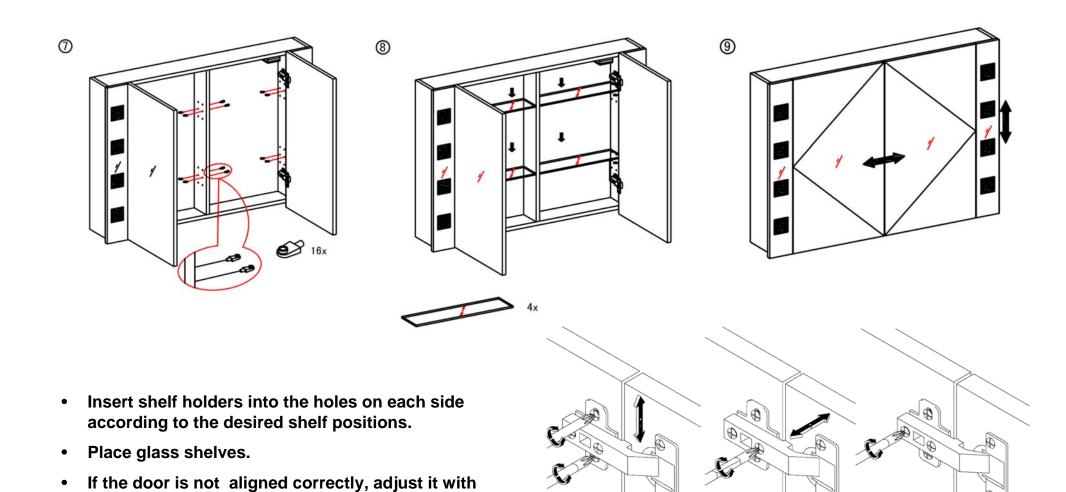


3-door cabinet

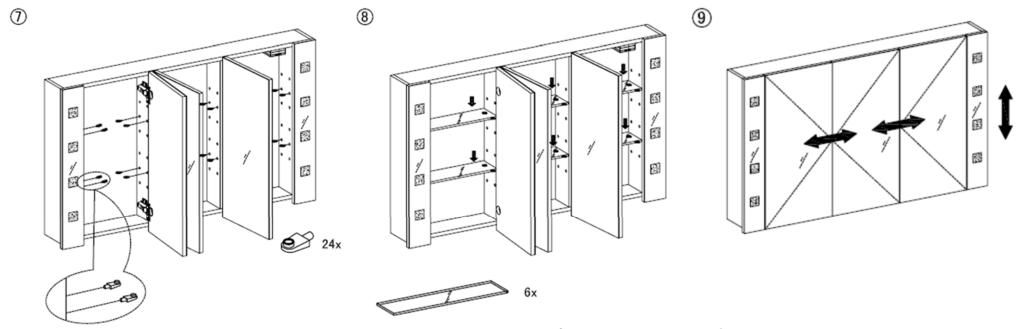


- Insert shelf holders into the holes on each side according to the desired shelf positions.
- Place glass shelves.
- If the door is not aligned correctly, adjust it with the screws.

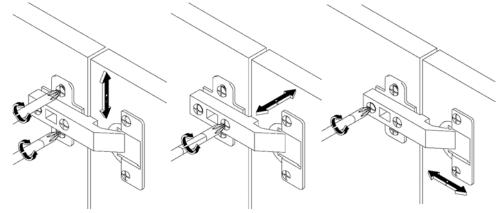



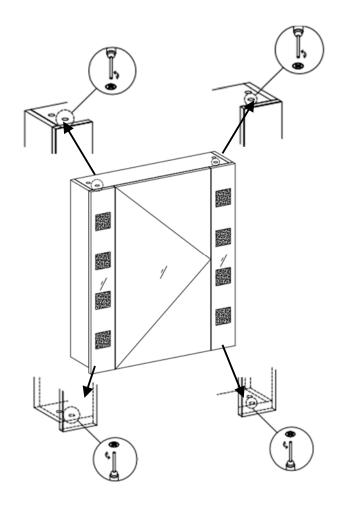



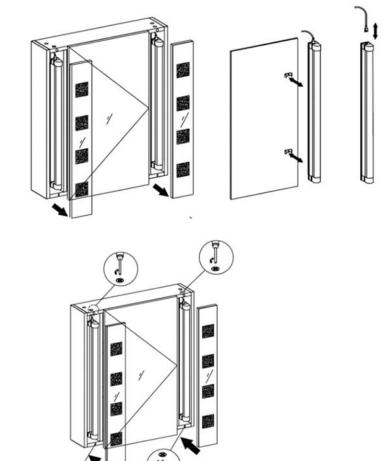

Change LED light if needed:

- Loosen the screws on the top and bottom of the cabinet.
- Open the cover panels and take out the lamps carefully.
- Put the new lamps in the original position, then cover the panel and tighten the screws again.

Cleaning & Maintenance:

Clean using a soft dry cloth only when turned off. Never use cleaning agents or abrasive materials. Do not allow moisture to come into contact with the lamps.

Product Series No.:

• Please provide the above serial number when contacting the customer service. For faster claim processing we kindly ask you to provide photos of the claim.

16D14