

FRENZY

Thermostatic Cool Touch Bar Shower Valve  
with Adjustable Riser Kit and Fast Fit Connections


Product Specification

Product Code:	FZ SHXMMCTFF C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of brass construction
Valve Type:	¼ Turn ½” ceramic disc valve
Cartridge Type:	Thermostatic Cartridge
Supply:	Suitable for all plumbing systems (Preferably balanced)
Inlet Connections:	15mm compression connections
Outlet Connection:	G ½
Working Pressures:	Min 0.2bar, Max 5.0bar
Dimensions for Fitting:	150mm inlet centres



Additional Information

- Unique Cool Chrome technology ensures the bar valve stays cool to the touch while in use.
- Dual control – Flow and temperature are controlled separately, giving accurate control of both
- Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure giving the stable outlet temperature
- Factory set to a maximum of 38°C to eliminate the ability to select an unsafe temperature – this is adjustable to suit user preference and up to a maximum of 46°C.
- Flow control handle incorporates an eco button to save water, this can be overridden by the user.
- Supplied with WMNT10 C fast fit connections.
- Supplied with 1.5m hose, riser rail, hose retainer and multi function handset with rub clean nozzles.
- Chrome plated to BS EN 248

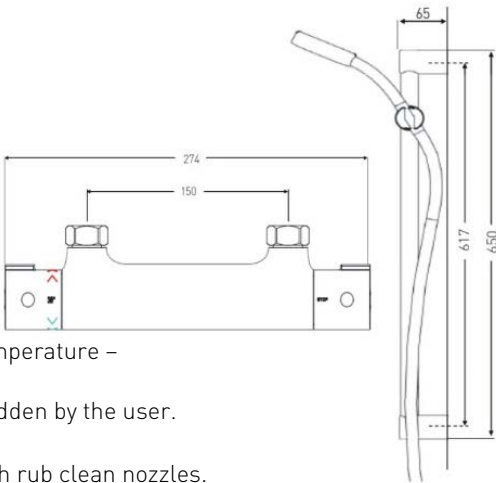

Flow Rates (litres per minute)

System Pressure (bar)	0.2	0.5	1.0	2.0	3.0	5.0
Open Outlet	4.2	7.5	11.2	15.8	19.4	25.0

Technical Advice: For further information please call 0844 7016273 or email [customercare@bristan.com](mailto:customercare@bristan.com)

Guarantee: 5 years covering manufacturing faults.



Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)

