GLL RAPSNK4 SF C

GALLERY Tap Range Gallery Rapid Boiling 4in1

Gallery Rapid Boiling 4in1 ScaleFilter Sink Mixer Chrome



			res	
_	\sim \sim	TII	$r \cap c$	
	Ca	uч		٠.

- Everything you need: tap, tails, tank, pressure reducing valve and filter included
- Safety: Touch control handle requires a few seconds contact to dispense boiling water
- Quality: Hard wearing, flawless finish that lasts
- Perfect taste: Supplied filter cartridge also absorbs chlorine and other chemicals to give you the perfect tasting tea or coffee
- Pure water: Supplied filter cartridge has been specifically designed to reduce water hardness using a 5 stage filter process to prolong the life of your tank

Product Certifications:








For more products, visit our website: http://www.bristan.com



Specification						
Product Type:	Boiling Water Tap					
Main Construction Material:	Brass; ABS					
Mount Type:	Deck					
Handle Type:	Round					
Connection Inlet:	1/2" BSP Flexible Tails					
Number of Tap Holes:	1					
Tank Capacity:	3 litres					
Temperature Settings:	4 Settings; Min: 80°C Max: 98°C					
Plumbing System Requirements:	Suitable for high pressure systems					
Minimum Dynamic Pressure (bar):	1.5 bar					
Maximum Dynamic Pressure (bar):	3 bar					
Maximum Hot Water Temperature °C:	65°C					
Maximum Static Pressure: (bar)	3					
Flow Type:	Dual					
Isolation Included:	No					
Power Rating:	1.83-2.0kW					
Electrical Supply Requirements:	230-240V AC, 50Hz, IPX3 Protection					

Dimensions (measurements in mm)

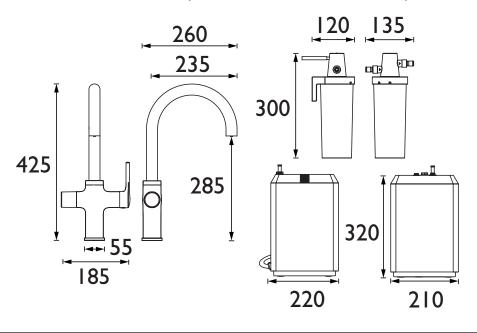

Flow Rates (I/min)						
System Pressure (bar)	1.5	2	3			
GLL RAPSNK4 SF C (Mixed)	10.1	11.7	14.3			
GLL RAPSNK4 SF C (Boiling Water)	2	2	2			
GLL RAPSNK4 SF C (Filtered Water)	2	2	2			

TECHNICAL DATA SHEET







