SAGITTARIUS

TAPS & SHOWERING


| Construction | Brass Body CuZn40Pb2, EN CW617N (equivalent to BS CZ122) | | | | | | | |
|------------------------|--|--|--|--|--|--|--|--|
| Finishes | Chrome plated to BS EN 248 | | | | | | | |
| Product Type | Contemporary | | | | | | | |
| Water Pressure | Min. 0.2 bar, Max. 6.0 bar | | | | | | | |
| Plumbing Systems | Suitable for all plumbing systems | | | | | | | |
| Standards | Complies with BS5412, BS EN200 | | | | | | | |
| Certification | Manufactured to comply with WRAS | | | | | | | |
| Cartridge | 25mm ceramic disc cartridge | | | | | | | |
| 5 | Neoperl Adjustable Slim Air | | | | | | | |
| Fitting | M10 x 350mm 1/2" BSP Female Flexi Tails | | | | | | | |
| Packaging | 46 x 28.5 x 34.5cm / carton (8 boxes / carton) | | | | | | | |
| Guarantee | 10 years against manufacturing faults (excluding serviceable parts). | | | | | | | |
| Additional Information | Supplied with G 11/4" sprung waste | | | | | | | |

BLADE CLOAKROOM MONO BASIN MIXER CHROME

BL/306/C





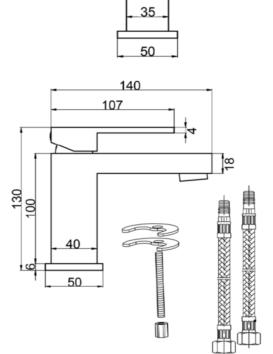

Flow Rates (Litres per minute)

| System Pressure | 0.1 Bar | 0.2 Bar | 0.3 Bar | 0.5 Bar | 1.0 Bar | 1.5 Bar | 2.0 Bar | 3.0 Bar | 5.0 Bar |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|------------|
| BL306 | 1.2 | 1.7 | - | 6.1 | 8.7 | 9.7 | 11.3 | - | - |

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK



