

# Caspian Skyline® E



The electric Skyline fits neatly into existing ceiling space - replacing a 600mm x 600mm ceiling tile and because it is ceiling mounted, it saves valuable wall space - particularly important in retail units



## Features

- It is unobtrusive and effective
- This high output fan convector effectively heats large areas
- Choice of punched steel or egg-crate grille options
- Supplied as standard in white but can be supplied in any colour

## Applications

Education, healthcare, leisure and sport, office, hospitality, retail and industrial.

## Motor

AC only.

## Finish

Outer casing 0.9mm zinc-coated steel.  
Polyester powder-coated.  
Polyester powder-coated RAL 9010.

## Installation

Maximum installation height 3.2m (10'6") to underside.  
Minimum 150mm void space required for recessed installation.  
Not suitable for bathrooms and other high humidity areas.  
Maximum flexibility in installation: only 600mm - side clearance required.  
Facility for connection to 6mm threaded rod or chains (rods and chains - not supplied).  
20 amp fused spur required.  
Unit must be earthed.  
Supplied with remote wireless controller.

## Control

Overheat protection: thermal cut-out.  
Manual reset procedure: switch power off at mains, wait 5 minutes, switch power on.  
Battery powered wireless controller with On/ Off function, thermostat control, setback temperature and run back timer.

## Attachment

Egg-crate grille accessory (remove standard grille)  
Surface mounting kit - 135mm. Provides a complete four-sided trim when fitted to a solid ceiling.  
Ceiling tile spacer (85mm).



## Specification

To specify state: Ceiling mounted heat emitter at 4Kw in white 600x600mm. As Smith's Caspian Skyline E.

# Caspian Skyline<sup>®</sup> E



The electric Skyline fits neatly into existing ceiling space - replacing a 600mm x 600mm ceiling tile and because it is ceiling mounted, it saves valuable wall space - particularly important in retail units

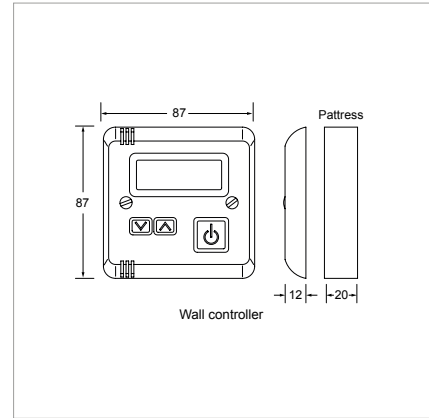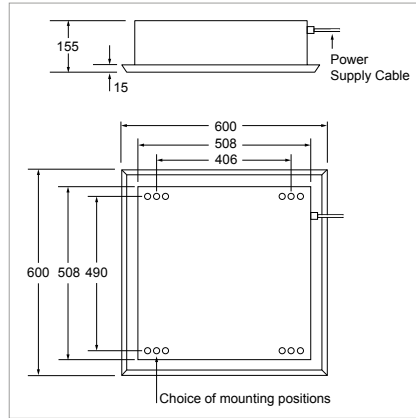

## Heat output

Model	Heat Output (Kw)	Mains cable	Fused spur	Total Power Consumption (kW)	Sound Levels (dBA)	Casting colour	Fan-only
SKYLINE E 4KW	4.0	1.5m	20A	4.1	40	white	n/a

## Ordering guide

Model	Packed Wt (kg)	Product Codes
SKYLINE E 4KW	9	HPSK40003

Accessory/Attachments	Product Codes
SKYLINE E 4KW EGG CRATE GRILLE ACCESSORY	HASK40104
SKYLINE SURFACE MOUNTING KIT (135MM)	HASK40102
SKYLINE CEILING TILE SPACER (85MM)	HASK40103

As part our commitment to continuous improvement Smith's Environmental Products may change the specifications of its products without prior notification or public announcement. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All dimensions are in mm unless otherwise stated. Please visit our website for the most up to date information.

Issue 005 | September 2021