











Orderline

01905 823299

General enquiries

01905 823298

Website

www.akw-medicare.co.uk

Fax

01905 823297

Quotes & orders email

orders@akw-medicare.co.uk

Enquiries email

sales@akw-medicare.co.uk

AKW Medi-Care Limited

Pointon Way Hampton Lovett Droitwich Spa WR9 OLR

International enquiries

+32 (0)68 334899

+32 (0)68 331658

ism@akw-medicare.com

Nationwide 24 hour despatch service



Life's about choices

Product Catalogue 2011/12









UK mainland only. AKW stock most showering and bathing items featured in this catalogue Orders placed before 2pm for stocked items will be despatched on the same day. Layout and content ©2011 AKW Medi-Care Limited. Designed by Wyatt International Ltd. Printed in England. Over 4,000 products from the UK's leader in showering, daily living and kitchen solutions for the elderly, disabled and less able people of all ages.





A revolution in care showers

With high visibility tactile buttons, audio recognition, adjustable features and a unique tear shape design, Luda® is the new breed of intelligent shower - only from AKW.

See page 152 for more details.

Introduction	3
Contents	3
Product design	6
National surveying	7
Warranties	8
Specifiers guide	8
Specifying / ordering procedure	9
Shower trays	10-93
Level Best® range	10-17
Tuff Form® range	18-29
Braddan range	30-43
Mullen® range	44-55
Sulby range	56-65
Multi Spec range	66-73
Low Profile range	74-81
Keppel range	82-87
Traditional trays	88-89
Standalone shower cubicles	90-91
Showerloo shower cubicles	92-93
Shower screens & accessories	94-149
Standard screens	96-113
Wet floor screens	114-123
Level Best® glass screens	124-125
Sliding screens	126-132
Silverdale screens	133-141
Shower screen accessories	142-145
Made-to-measure screens	146-147
Made-to-measure order form	148-149
Chause	150 157
Showers Luda®	150-157 152-154
Triton	152-154
Mira	155
Arka®	156-157
MI NA	130-137
Waste systems	158-167
Digital pumps	158-159
Manual pumps	160-161
Screedmaster® range	162-163
Pumped wastes	1// 1/5
- uniped wastes	164-165

hower seats	168-179
000 Series - shower seats	170-174
ooden slatted shower seats	175
000 Series shower seats	176-178
bbey moulded bathseat	179
obility support	180-195
900 Series heavy duty grab rail	182-184
600 Series natural grip grab rail	185
400 Series large fluted grab rail	186
200 Series stainless steel grab rail	187
000 Series mild steel flat end grab rail	188
oilet Plinths	188
700 Series special purpose grab rail	189
800 Series fold up grab rail	190
reestanding shower seats	191
andard and wheeled shower chairs	191
ariatric products	192-193
olding access ramps	195
nreshold ramps	195
athroom products	196-207
oilets & cisterns	198-199
ush handle	200
oilet seats	200
arm system	201
ash basins	201-202
ıll pedestals	203
aps	203
athroom accessories	204-207
ktractor fans	207
ос М	208-215
ack options 1-4	212-215
itchens	216-217
roduct range	216-217
xtras	218-224
rder form	218
eneral information	219
ade-to-measure order form	220-221
ocation / directions	222
egal information	223



life's about choices

You **need** specialist products. You want choice, style and value. Welcome to AKW

We're all different, with different needs. But there's something we all want: and that's choice in life. And that's exactly what we offer you.

As the UK market leader in showering, daily living and kitchen solutions for people with mobility needs, we've listened to our customers and we're passionate about giving them what they want: high quality products that meet practical requirements, offer the widest possible choice and help people create living spaces which give them quality of life.

We believe real choice is a big stepping stone towards having a good quality of life.

We have 30 years' experience, over 4000 product lines, covering everything from wet rooms, shower enclosures and kitchens, to grab rails and mobility ramps. They're available in a wide range of sizes, styles, colours and accessories too. You'll find them all in our 2011/12 catalogue – or why not visit us in our showroom in the Head Office in Droitwich, Worcestershire. Here, you can see the products and even try them out in a variety of domestic and healthcare settings.

Choice, competitive pricing and first-class customer service all make AKW the first choice for all your showering and daily living needs.

AKW is the trading name of DLP Limited.



Showroom

You can view many of our products which are on display at our West Midlands Head Office. Please call customer services to arrange a visit.



Customer services

A friendly team is on hand from 8am-5pm Monday-Friday 01905 823299



Ordering

It's easy. You can phone our customer services (see above), or complete an order form and email/fax it to us email to orders@akw-medicare.co.uk fax to 01905 823297



Order forms

You can download them 24/7 on our website www.akw-medicare.co.uk



Technica help line

Something specific you need to know about our products? Call our expert team 01905 823299



Next day delivery

Provided you order by 2pm, it'll be with you the next working day.



Installation instructions

Our products are easy to install and our instructions are easy to access. They're all online. www.akw-medicare.co.uk (Register in Technical Login)



Customer service

At AKW, we don't just pride ourselves on choice and value, we're just as committed to delivering first class customer care - and that includes friendly teams, expert advice and rapid delivery (we've got a huge stock and an excellent distribution network that covers the whole country). Ordering is easy. You can phone, fax or email us and provided you place your order by 2pm, we'll deliver it the next working day. You'll find all the numbers and details on this page.

Our knowledgeable and highly trained teams are here to make sure you don't just make the best choice, but also the right choice. Just call our customer services or technical helpline whenever you need, and we'll be able to help.





Product quality

AKW is certified with ISO 9001 Quality Management and ISO 14001 Environmental Management accreditations which provide assurance for the manufacturing quality. In addition to rigorous testing all our products are also:

- Quality checked at all stages of the production
- Inspected prior to packaging
- · Wrapped up securely to reach customer in perfect condition

Innovation

We're always looking to add features which add value to our products

- All products are specifically designed to cater for mobility and care markets
- · Product development process involves specifiers, healthcare professionals, contractors and end users to ensure products meet all needs
- · Heavy investment in research and development results in quality and innovative products introduced to the market

Shower trays

Our shower trays are specially designed to provide strength and durability

Strength

To give you longer-lasting products, we:

- Reinforce many travs with steel sections for extra strength
- Use a consistent weight of material in every tray
- Carry out rigorous testing, including withstanding heavy loads
- Continuously invest in manufacturing technology



Bathrooms, & mobility support products

Our design and manufacturing standards ensure both choice and quality around the home

Grab rails

Our extensive range of internal and external grab rails are ergonomically designed for greater safety and grip. Options include:

- Plastic and metal finishes, including stainless steel to prevent rusting
- Blue grab rails available for the visually impaired

Shower seats

We have a full range of seats for most clients' needs. Features include:

- Height adjustable (most models)
- Strength (weight bearing up to 40 stone/254.5kg)
- Extra width and horseshoe seats

Bathroom products

- · A comprehensive range of toilet pans, cisterns and washbasins, made from vitreous china
- · Many products are especially designed to accommodate wheelchair users

Kitchens

Our high quality range of kitchens and accessories includes:

- Modern options of door finishes and work top colours
- Full range of widths available to suit most requirements
- · Metal drawer box system for extra strength
- P.V.C edged doors to prevent damage
- Mobile trolley units
- Pull down baskets in the wall units
- 300mm plinths and adjustable legs (can be cut on site)

Please note. Fitting non AKW screens to our trays and formers can adversely affect the integrity of the water seal, and is not recommended

• Rise and fall units available in a range of sizes

Shower screens

Our screens are designed for ease of installation and use, and excellent quality water retention

Bottom and Vertical Seals

We ensure better water retention by:

- Fitting a seal on the bottom edge of our standard screen range to provide a continuous water barrier
- Ensuring all rubber seals are coaxial, so they won't roll or peel out
- Fitting a bubble seal on the bottom edge of the sliding screen system, improving the sliding action and providing a water barrier

Hinges

To provide better wear and an easier user experience we:

- Manufacture all hinges and caps from hardwearing Nylon 6
- Use 180° hinges to enable doors to open both inwards and outwards and 360° hinges for bi-folding screens
- · Fit unique locking rising butt two-way hinges

Gaskets

Elastomeric gaskets provide a high integrity, seal between the screen framework and panels

Frame construction

To ensure a longer life, all our frames are:

- · Extremely robust in design
- · Mechanically fixed with screws
- Modern, smooth latches and D-handles for comfort and grip
- · Made with shatterproof PET glazing
- With a stronger magnetic strip which increases water retention on all screens with a 45° corner

Our site surveying service

Helping you get the home you want


We have a dedicated and highly professional CRB checked National Surveying Team who can come to your home and help you plan your new kitchen or showering area. We cover the whole country, so wherever you are, we can be there for you.

We'll visit, carry out a guick but detailed survey, and give you a recommendation for the best way to plan your space. We even use the very latest 3D drawing technology to show you what your new room will look like! Our surveys comprise three easy stages:

- 1. An experienced AKW surveyor will visit you home and take all necessary measurements
- 2. We will discuss your needs to make sure we understand exactly what you want and provide technical advice
- 3. We'll give you a 2D/3D computer-aided drawing of what your new room will look like

Together, we'll make sure you get the very best advice, and the very best kitchen or showering area.

Plan view

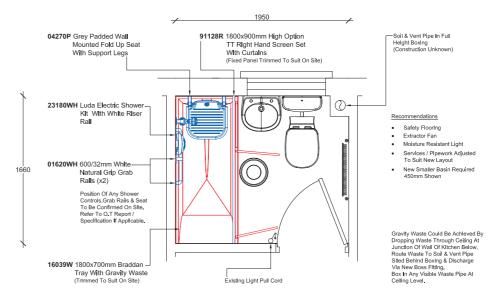

NEW! Introducing 3D Virtual World Drawings





Guaranteed for life

Our 'no guibble' lifetime warranties* give you total peace of mind



We have total confidence in the quality and durability of our products and we're sure you'll be delighted with your choice.

To honour our promise, we offer a lifetime warranty against manufacturing defects on our catalogue items (exclusions apply).

* The lifetime warranty excludes normal wear and tear in general domestic applications. It applies only to products being installed for the first time and according to relevant local and national regulations.

Specifiers guide

Your 'at a glance' reference to shower trays and cubicles

PRODUCT RANGE	ı	FLOOR TYPE			FITTING				WASTE TY	/PE
Trays & formers	Wood	Concrete	Screeded	Corner	Alcove	Cut to length	Tray handling	Gravity waste	Pumped waste	Product pages
Shower trays	Shower trays									
Level Best® (wet rooms)	Complete level access	-	Complete level access	Yes	Yes	Yes	Non handed	Yes	Yes	10-17
Tuff Form®	Complete level access	-	Complete level access	Yes	Yes	Yes	Non handed	Yes	Yes	18-29
Braddan	Level access or surface mounted	Surface mounted	Level access or surface mounted	Yes	Yes	Yes	Non handed	Yes	Yes	30-43
Mullen®	Level access / surface mounted	-	Level access / surface mounted	Yes	Yes	No	Handed	Yes	Yes	44-55
Mullen® (Cut-to-length)	Complete level access	-	Complete level access	-	Yes	Yes	Handed Non handed	Yes	Yes	44-55
Sulby	Surface mounted	Surface mounted	Surface mounted	Yes	Yes	Yes	Non handed	Yes (built in)	No	56-65
Multi Spec	Level access / surface mounted	Surface mounted	Level access / surface mounted	Yes	Yes	Yes	Handed	Yes	Yes	66-73
Low Profile	Level access / surface mounted	-	-	Yes	Yes	Yes	Non handed	Yes	No	74-81
Keppel	Surface mounted	Surface mounted	Surface mounted	Yes	Yes	No	Handed	Yes	Yes	82-87
Walker (traditional)	Surface mounted	Surface mounted	Surface mounted	Yes	No	No	Handed	Yes	Yes	88
Wheeler (traditional)	Surface mounted	Surface mounted	Surface mounted	Yes	No	No	Handed	Yes	Yes	88
Cubicles										
Standalone	Surface mounted	Surface mounted	Surface mounted	Yes	Yes	No	Handed	Yes	Yes	90-91
Showerloo	Surface mounted	Surface mounted	Surface mounted	Yes	Yes	No	Handed	Yes	Yes	92-93

How to choose your shower tray, screen and accessories

An easy to use reference to help you make the right choices

When it comes to showering we have plenty of choice, because it's important and because we're aware that there are countless different needs. There's a lot to consider, such as the space you have available, existing plumbing and the type of floor. These guidelines coupled with our specifiers guide, will help you make the right choice. Remember: we're always on hand to help with advice.

Step 1: choose your shower tray

You'll find all our shower trays on pages 10-93. Things to consider:

Floor type

AKW shower trays are designed for different types of floors e.g. wooden, solid concrete floors (which could be unbreachable) or a screeded floor.

Where is your shower tray going to be fitted? In a corner, or an alcove? Does it need to be cut to fit a particular size? Many of our trays are bath replacements and are therefore handed to the waste end. Please note. AKW shower trays are not generally for use with power showers or high pressure systems.

Drainage

Most AKW trays will accommodate gravity or pumped wastes – indeed, some come with them already built-in. If your shower enclosure requires waste water to be pumped away, we have a wide selection of drainage pumps (see the waste systems section from pages 158-167).







Step 2: choose your shower screen


Once you've chosen the tray, the next step is to specify a suitable shower screen. You'll find these on pages 94-149. Things to consider:

Entry & access

It's important to think about how the shower screen opens (the entry path), so that there's space for other fittings such as the wash basin and toilet. Our shower screens are handed in the same manner as the trays, according to waste end. Compatible screens all available options.







Step 3: choose your accessories

AKW offers a huge selection of shower seats, grab rails, showering aids and bathroom products You'll find these on pages 168-207.









Level Best®

With a wide choice and contemporary designs, Level Best® helps you create a domestic Wet Room with plenty of style

Benefits

- Huge choice, so you can create the bathroom you want
- Stylish, modern designs to give you attractive yet comfortable surroundings
- Glass screens provide a contemporary finish
- Easy to install
- High quality, toughened glass screens for extra safety

Features

- Suitable for both wooden and concrete installations
- Work with gravity and pumped wastes
- Formed from compressed GRP for exceptional strength and stability (Tuff Form® former)
- Nine sizes available to suit most installation requirements
- Shower screens are made from 6mm toughened safety glass
- Contemporary polished aluminium finish
- Screen seal available to close the gap between
- Tuff Form® formers are trimmable on 3 sides up to 150mm from the waste area

- 1 Concave Wash Basin
- 2 Mixer Tap
- 3 Stainless Steel Fold Up Grab Rail
- 4 Arka Mixer Shower
- 6 Level Best Screen
- Close Coupled Dual Flush Toilet and Spatula Flush Handle
- 5 Wooden Slatted Shower Seat 8 Stainless Steel Support Rail
 - 9 Tuff Form® Former with Stainless Steel Waste

Features at a glance


























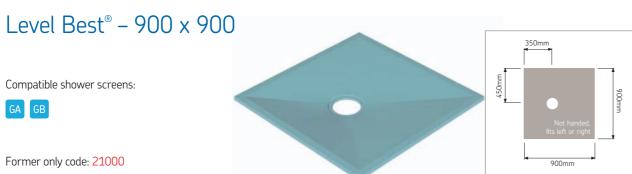




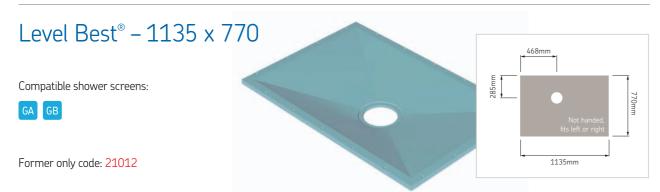


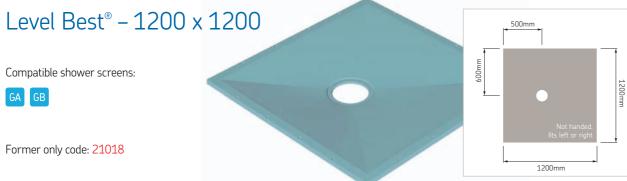






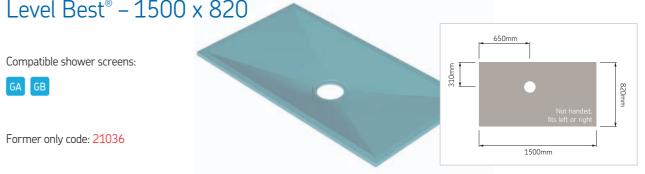

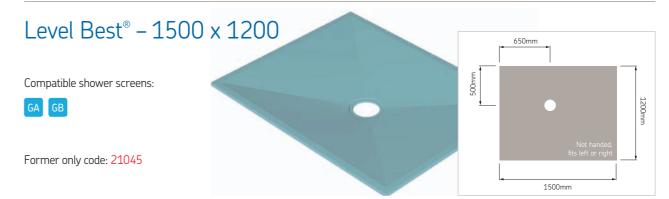

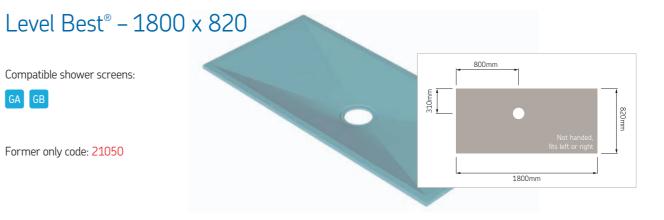




GA GB




Level Best® screen options

level best

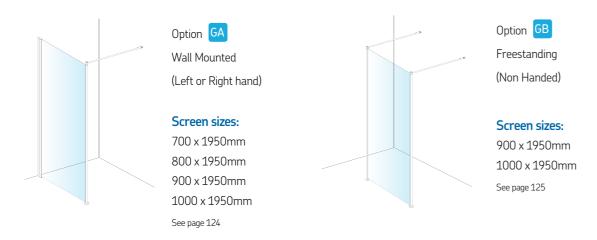

Level Best® screen combinations

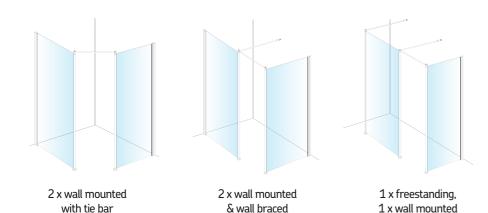

Glass screens are 6mm thick

Tie bars (optional & extra)

- 700mm length LB00123
- 800mm length LB00124
- 900mm length LB00125

Wall brace

• 1400mm length LB00126 (can be trimmed)

Level Best® waste adaptor

This adaptor ring allows a typical top clearing trapped waste to be fitted. This product gives dual benefits - ideal where space is at a premium, while at the same time making connection from above an easier job.

Waste adaptor with 50mm waste code: LB00102 Waste adaptor with 19mm waste code: LB00103







Other Level Best® screen options - Silverdale

All Silverdale screens include curtain rail, curtain, gliders and fixings, with the option of clear or frosted panels






* Please note: for options MW & NW, curtain rails are supplied to be cut-to-length on site.



OPTION EW SCREEN OPTION HF SCREEN See page 138 See page 135



OPTION HFW SCREEN See page 139



See page 134



OPTION M SCREEN See page 136 for option SM see page 128



OPTION A SCREEN

See page 133



OPTION N SCREEN See page 137 for option SN see page 129



See page 141

Waste options

OPTION MW SCREEN*

See page 140

Stainless steel plate is 120mm by 120mm for all models. The plate height is adjustable to accept floor tiles between 6mm and 18mm including adhesive.

For shower waste options see pages 156-165



SS-TF75 Gravity Waste: Patent Pending Code: LB00101



SS-PGTF Pumped Gulley: Patent pending Code: LB00104



SS-TFWA Waste Adaptor: Patent pending Code: LB00171



Waterproofing system

MAPEI provide a comprehensive range of products to be used alongside AKW products in the construction of domestic wet rooms. Additional items are available for larger wet rooms.

Standard MAPEI - Wet Room Kit - LB00113

- 1 x 10kg drum of Mapegum WPS (Coverage on 10kg drum is 5m²)
- 1 x 10 metres of Mapeband tape (120mm wide)
- 2 x 2 packs of Mapeband internal corners
- 1 x Mapeband waste outlet gasket (400 x 400mm)
- 1 x 2 pack of Mapeband pipe inlet kit

Extra items available

- 5kg, 10kg or 25kg of Mapegum WPS LB00115, LB00114 or LB00121
- Mapeband tape (10m x 120mm wide) LB00118
- Mapeband internal corners x 2 LB00116
- Mapeband external corners x 2 LB00117
- Mapeband waste outlet gasket LB00119
- Mapeband pipe inlet kit x 2 LB00120



Standard MAPEI - Wet Room Kit - Lifetime warranty does not apply

Varme cable mats

- under tile heating system

The Varme Mat system comes already taped to a 500mm wide fibreglass mesh. Making it much faster to lay out in larger 'open plan' areas when compared to other systems.

Varme Mat systems come complete with:

- Heating cable supplied woven to a self adhesive mesh
- Fully programmable thermostat controller with floor probe
- Floor primer
- · Roller for primer
- Simple installation instructions
- Manufacturers Lifetime Warranty
- Other sizes available (7 days delivery)

Recommended for all internal rooms, will give approx 130 watts per sqm at 85% room coverage.





Coverage	Output	Length	Product Code
2.0 sqm	300watts	4.0 x 0.5m	LB00131
2.5 sqm	375watts	5.0 x 0.5m	LB00132
3.0 sqm	450watts	6.0 x 0.5m	LB00133
4.0 sqm	600watts	8.0 x 0.5m	LB00134
5.0 sqm	750watts	10.0 x 0.5m	LB00135

Features at a glance



Suitable for

wooden floor





Suitable for

screeded floor



Level access



Offset waste

6.0 sqm



Corner fitting



12.0 x 0.5m LB00136

Alcove fitting

Stainless steel grab rails

Level Best® stainless steel grab rails are designed to provide additional support to complement modern bathrooms. Strict manufacturing and finishing procedures guarantee quality and strength.

Features & benefits:

- High Polished Stainless Steel finish
- Strong and robust
- Rustproof
- Easy to clean

Description	Product Code
300mm Stainless Steel grab rail	LB00127
450mm Stainless Steel grab rail	LB00128
600mm Stainless Steel grab rail	LB00129





level best

Shower stool & fold down shower seat

Level Best® wooden slatted seats are made from ecologically friendly rubberwood which has a dense grain, minimising shrinkage.

Rust proof stainless steel legs add to the overall appearance.

Features & benefits:

- An elegant solution for any bathroom
- Polyurethane treated rubberwood slats
- Strong and comfortable
- Easy to clean
- For users up to 40 stone/254kg
- Both stool and seat have adjustable feet





Description	Product Code
Wall mounted, slatted, fold-up wooden seat	04030
Floor mounted, wooden slatted stool with adjustable legs	05080

Tray Applications

Level Best® screens are also suitable to fit on AKW trays. Fitting kit is supplied as standard.






Level Best® screen seal

Level Best® tray foot





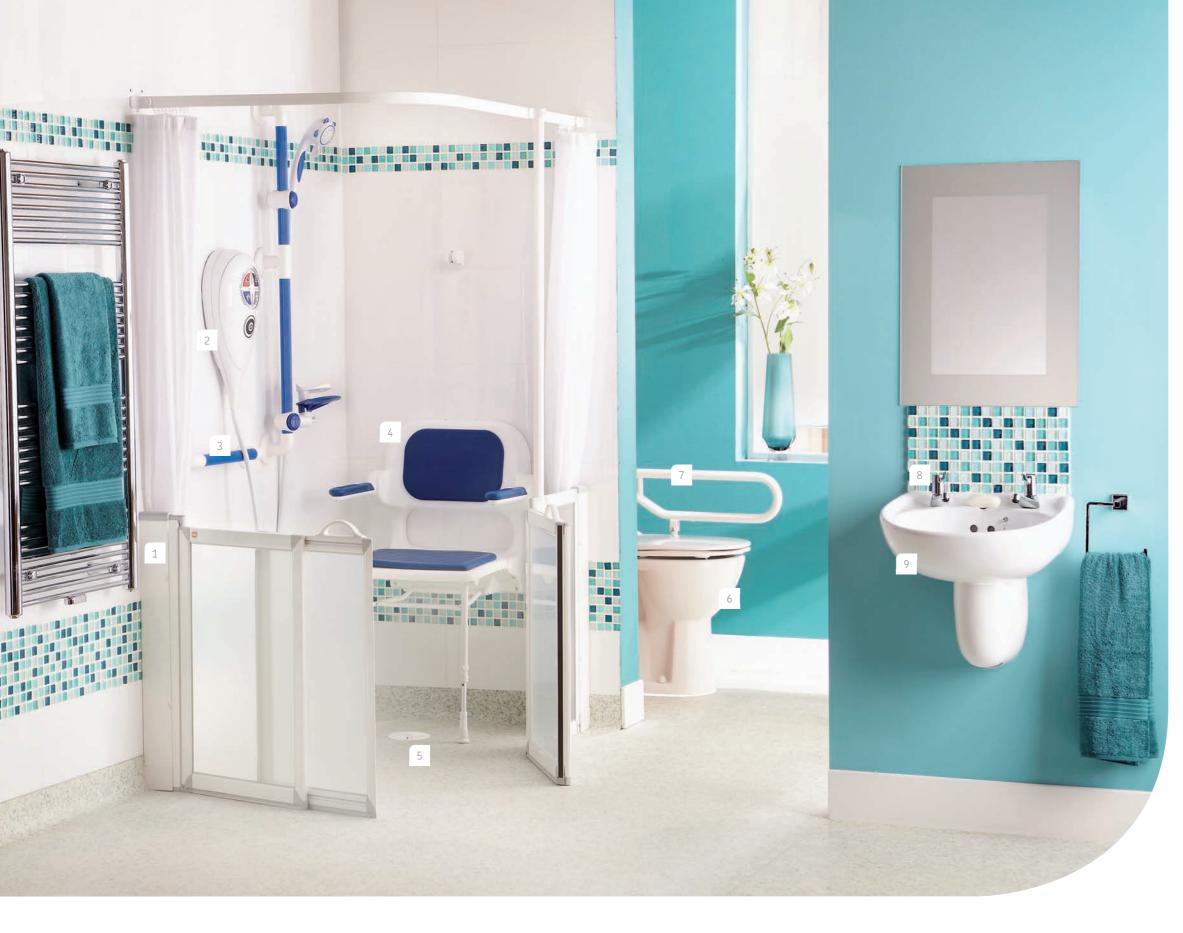

1 Standard Sliding Screen Option SX

- 2 Luda® Electric Shower
- 3 Fluted Grab Rail
- 4 Shower Seat 2000 Series
- 5 Tuff Form® Former
- 6 Close Coupled Dual Flush Toilet and Spatula Flush
- 7 White Fold Up Support Rail
- 8 Chrome Lever Taps
- 9 450mm Wash Basin with Semi Pedestal

Tuff Form®

Helping you create wet floor shower areas and multi-user bathrooms, Tuff Form® makes excellent use of available space

Benefits

- Creates a full level access showering solution
- Easily trimmed on site to enable fast and simple installation
- Exceptionally strong to accommodate a user with wheelchair and a carer too (up to 40 stone/254kg bearing weight)
- Tens of thousands of installations worldwide, so it's popular – and proven!
- Screen sets fold back to free up floor space - ideal for wheelchair access
- A variety of screen sizes and styles give you added choice
- A wet floor installation with suitable slip resistant flooring provides excellent water integrity with comfort and safety underfoot
- Fully recyclable, made from reusable plastic
- Superior strength and rigidity, ideal for fitting under the bath in multi-tenant dwellings

Features

- Suitable for both wooden and solid floors
- Formed from compressed GRP which allows the Tuff Form® to be cut to length or trimmed to within 150mm of the waste without losing any strength integrity
- The ribbed design of the underside eliminates slippage or float during installation
- Offset waste position to avoid joists pipework
- Tuff Form® depth is 22mm
- Pre-formed fixing holes

Features at a glance































Tuff Form® – 900 x 900

Compatible shower screens:

EW HW HFW SE SM GA GB

Former only code: 21000

Former with TF75 waste code: 21002

Former with waste adaptor and standard waste code: 21060

Tuff Form® – 1000 x 1000


Compatible shower screens:

EW HW HFW SE SM GA GB

Former only code: 21008

Former with TF75 waste code: 21006

Former with waste adaptor and standard waste code: 21061

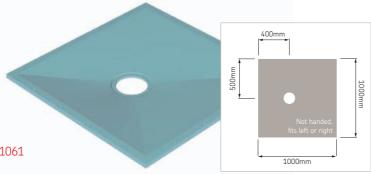

Tuff Form® - 1135 x 770


Compatible shower screens:

EW HW HFW GA GB

Former only code: 21012

Former with TF75 waste code: 21014

Former with waste adaptor and standard waste code: 21062

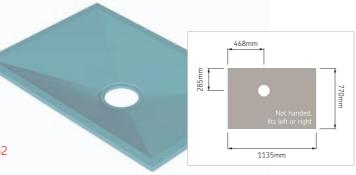

Tuff Form® – 1200 x 1200


Compatible shower screens:

EW HW HFW MW SJ SM SN SU GA GB

Former only code: 21018

Former with TF75 waste code: 21020

Former with waste adaptor and standard waste code: 21065



Tuff Form® – 1300 x 820

Compatible shower screens:

EW HW HFW NW XW SE SJ SM


SN SU SX SY GA GB

Former only code: 21027


20 Product catalogue 2011/12

Former with TF75 waste code: 21029


Former with waste adaptor and standard waste code: 21063



Tuff Form® – 1400 x 900 Compatible shower screens: BW EW HW HFW NW SJ SM SN SU GA GB Former only code: 21028 Former with TF75 waste code: 21030 Former with waste adaptor and standard waste code: 21070

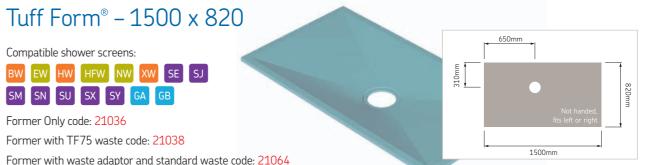



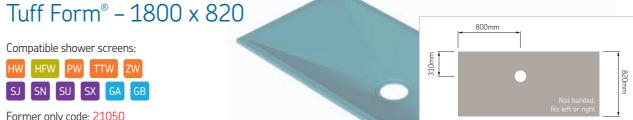

Former only code: 21050 Former with TF75 waste code: 21052 Former with waste adaptor and standard waste code: 21066

Note: Fall to waste gradient varies dependent on size of the tray but within 1:40 ratio

1800mn

Screen options

All screens include curtain rail, curtain, gliders and fixings.




Sliding shower screens



* Please note: for options MW & NW, curtain rails are supplied to be cut-to-length on site.



OPTION BW SCREEN See page 114



OPTION EW SCREEN See page 115 for option SE see page 126



OPTION HW SCREEN See page 116



See page 117

Glass shower screens

see pages 124 to 125







OPTION MW* SCREEN See page 118 for option SM see page 128



OPTION NW* SCREEN See page 119 for option SN see page 129



OPTION PW SCREEN See page 120



OPTION TTW SCREEN See page 121



OPTION SU SCREEN* See page 130 for option SU see page 130



OPTION XW SCREEN See page 122 for option SX see page 131




OPTION SY SCREEN See page 132



OPTION ZW SCREEN See page 123

Level Best® screen options



Option GA


Wall Mounted

(Left or Right hand)


Screen sizes:

700 x 1950mm 800 x 1950mm 900 x 1950mm 1000 x 1950mm

See page 124



Silverdale screen options







OPTION HFW SCREEN See page 139



OPTION MW SCREEN See page 140



OPTION NW SCREEN See page 141



There's no tougher former than a Tuff Form® former

- Tuff Form® is the first product in its market sector to have a carbon footprint assessed to the PAS 2050 specification and has undergone verification by the Carbon Trust
- Tuff Form® has achieved a European Fire Safety Rating of CFI-s2
- Tuff Form® is 5 times more durable than recycled plastic formers when side transferring a 40 stone person, avoiding possible replacement 5 times in the same life cycle
- Tuff Form® will not warp or deform by temperatures reached in a normal bathroom situation (and has been tested to 100°C)
- Tuff Form® can be cut to within 150mm of the waste without compromising strength or water integrity
- The waffle underside of Tuff Form® makes it easier to settle into a screeded installation than a smooth underside, which can slide around during installation
- Tuff Form® is designed to provide a 'Bathroom for Life'
- In the event of needing to recycle a Tuff Form®, it is 100% recyclable at any local plant
- A recycled Tuff Form® creates a Grade 1 material which can be used in ANY glass reinforced products
- Hundreds of thousands of Tuff Forms® have been installed across the world
- Tuff Form® is widely used in the US and has been tested to ANSI Z124.1.2-2005



BRE Tuff Form® Testing

Tuff Form®

a leading wet floor former with carbon footprint assessment







Tuff Form® is the first wet floor former in the world to have a carbon footprint assessed to PAS 2050 specification and has undergone verification by the Carbon Trust. This PAS 2050 assessment was undertaken by Sustain.

Tuff Form® is fully recyclable demonstrating AKW's continuous investment in tackling climate change.

The Building Research Establishment (BRE) independently tested a Tuff Form® for 20,000 side-transfer loadings of a 40 stone (240kg) person moving onto a single shower seat leg (severest test). The Tuff Form® withstood the test whilst a competitor's former failed between 3220 and 4757 cycles. This proves that Tuff Form® will last 4 or 5 times longer than other wet floor formers available on the market. The lifetime Carbon Footprint can therefore be considered 4 or 5 times lower than other formers making it the most 'green' wet floor former on the market.

Full test report available on request.

Tuff Form® waste adaptor

This adaptor ring allows a typical top clearing trapped waste to be fitted into a Tuff Form®. This product gives dual benefits - ideal where space is at a premium, while at the same time making connection from above an easier job.

Waste adaptor with 50mm waste code 25124

Waste adaptor with 19mm waste code 25129

Low depth GW90 TFWA code 25409



TFWA prior to installation of vinyl flooring

Tiling adaptor kits

Available separately for the TFWA, Screedmaster, 152mm (6 inch) code 21101 TF75 and PGTF wastes when fitting 152mm (6 inch) or 203mm (8 inch) ceramic floor tiles. The orientation is not fixed allowing it to be set in accordance with the position of the floor tiles.

203mm (8 inch) code 21102










Tray to be fitted on timber supports.

Tuff Form® has pre-formed screw fixing holes TF75 shower gulley Depth below tray: 125mm

Rotate former to avoid the joists

The waste position can be moved to avoid the wooden floor joists by rotating the Tuff Form® former by 90 or 180 degrees respectively.



Concrete floor installation


AKW PGTF Pumped Gulley Waste.

Complete Level access.

Tuff Form® inset into screed for complete level access.

To install Tuff Form® with a 15mm PGTF shallow waste a 43mm minimum depth is required.

To install Tuff Form® with a 22mm PGTF shallow waste a 52mm minimum depth is required.

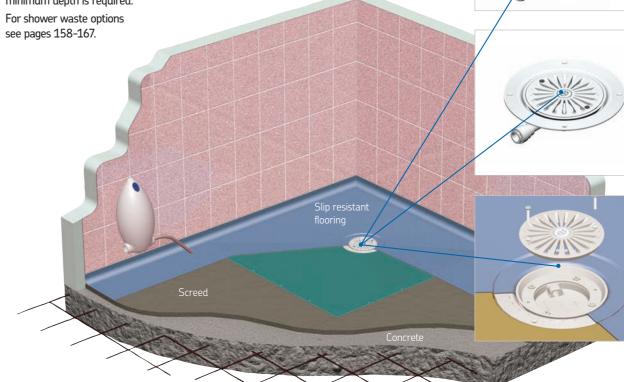


PGTF shallow waste, shown

open for easy cleaning.

(Patent GB 2373515)

Slippage or float during installation is eliminated by the ribbed design of the underside which allows the tray to key into soft cement or screed.



PGTF Shallow waste can be opened for

15mm waste depth below tray: 35mm

22mm waste depth below tray: 44mm

easy cleaning.









Corner blocks

all featuring corner blocks.

Wet floor screen options fit Tuff Form®,

These blocks can be trimmed to fit on site, to accommodate any radius to

Pre formed screw

fixing holes

Bathroom for Life installation

The AKW Tuff Form® offers superior strength and rigidity which can support a bath and bather. Installed with a Bath to Tray Adaptor this provides an easy upgrade from a conventional bathroom to a wet floor showering area when needed.

The TF75 Bath to Tray Adaptor, used in conjunction with the TF75 Tuff Form® Gravity Waste, has been designed to offer customers a Bathroom for Life.

Tray needs to be supported on all four sides and with cross braces and around the waste area. No underfoam required.



Features

- 75mm water trap
- Compression pipe fitting $(1\frac{1}{2})$ / 43mm to EN1455)
- Supplied with blanking cap for use when pressure testing pipe system and also avoids collection of building residue

When full of water and a larger adult, a typical 1.7m long bath can weigh up to 1/2 tonne, creating support-foot point-loadings of 125kg - equivalent to 40kg per square centimetre.

Tuff Form® can easily support 4 such point loads, totalling 500kg, provided they are at least 450mm apart and are located in a rectangular pattern.

In fact, a correctly installed Tuff Form® with edge and waste region support noggins can carry concentrated static loads in excess of 125kg, applied over an area 20mm square, without difficulty.

Typical waste connection from installed bath into Tuff Form® wet floor former and below.

Bath to tray adapter

Bath legs can be

of the Tuff Form®.

situated directly on top

product code: 25410:TF75

For specialist support needs it is possible to increase this further - up to 1 tonne. If you'd like to explore this, please get in touch with AKW's technical team.

Note. The loads stated in this example exceed the EN433 test loadings which Altro can meet for residual indentation, so this must be taken into consideration. Similarly, floor loadings which exceed BRE (Building Research Establishment) guidelines for domestic floors or Building Regulation guidelines should be reviewed by structural engineers or similarly qualified professionals. AKW can work with you to determine the best solution for specialist needs.

Features at a glance



Suitable for

wooden floor





Suitable for

screeded floor

Complete level access



(after installation of

vinvl flooring tiles)





(non handed fits left or right)


Corner fitting

Pipe duct kits

Available separately pipe duct kits fit on to the edge of the tray to avoid re-routing of existing pipework.

- Fully waterproof mouldings
- Quick installation
- Substantial savings on time and labour costs
- · Requires extra wide compensator (see below)

Kit 1 contents	Product code
1 x 1800mm pipe duct 2 x Plastic end caps	21105
Kit 2 contents	Product code
1 x 1000mm pipe duct 2 x Plastic end caps	21106
Kit 3 contents	Product code
1 x Plastic corner moulding	21107

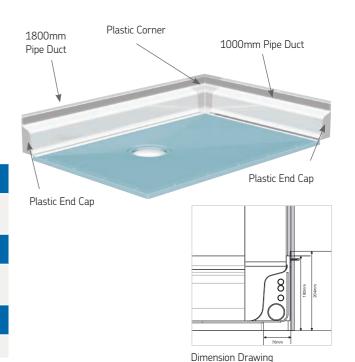

Extra wide compensator

Designed to give approximately 50mm additional width to a standard shower screen enclosure area. Also for use with a pipe duct kit or where pipes have been boxed in.

Width: 105mm

750mm, 900mm or 1870mm

Description		Product code
750mm	Non handed	24139
750mm	Left (short)*	24140
750mm	Right (short)*	24141
900mm	Non handed	24142
900mm	Left (short)*	24143
900mm	Right (short)*	24144
1870mm	Non handed	24145
1870mm	Left (short)*	24146
1870mm	Right (short)*	24147

^{*} For use with Pipe duct kits





Alcove fitting







door closers



Trimmable

Rising butt screen In-line magnetic



Braddan

With extensive choice and easy installation, Braddan is a long-term favourite among specifiers, installers and end-users

Benefits

- The Braddan's unique design can create a full level access, surface mounted or step in shower enclosure
- Suitable for all floor types
- Quick draining, thanks to a 35mm fall to the waste
- Integral added strength for extra peace of mind
- A slip resistant surface makes them safe to use
- A full selection of screens, curtains, rails and ramps means you can create the perfect bathroom for your requirements

Features

- Suitable for all floor types
- A central waste position
- There's no need for under tray foaming
- Pipe duct kits are available to help with installation
- We supply a 'trim to length kit' with 1800mm trays
- 1800mm trays can be cut to 1500mm, allowing flexibility of fitting
- 5 waste options are available (see accessories)
- All trays are supplied with a separate tiling upstand

- 1 White Fold Up Support Rail
- Close Coupled Dual Flush Toilet with Spatula Flush
- 3 White Ergonomic Toilet Seat
- 4 Option M Screen Set
- 5 Braddan Shower Tray
- 6 4000 Series Seat
- 7 Luda Twist® White Rail
- 8 White Fluted Grab Rail
- 9 Mixer Tap
- 10 Concave Wash Basin with Semi Pedestal

Features at a glance






























Braddan - 800 x 800

Compatible shower screens:



Tray with gravity waste code: 16522W Tray with upward pump waste code: 16523 Tray only code: 16522

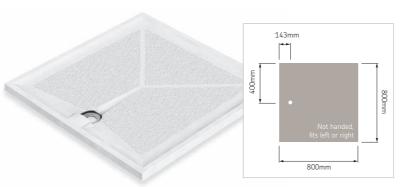


Braddan - 820 x 820

Compatible shower screens:

E H HF SE SM GA GB

Tray with gravity waste code: 16470W Tray with upward pump waste code: 16471 Tray only code: 16470

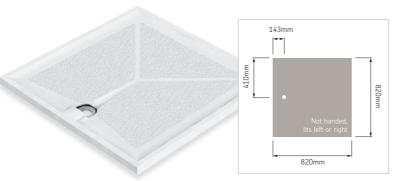


Braddan - 900 x 900

Compatible shower screens:

E H HF M SE SM GA GB

Tray with gravity waste code: 16472W Tray with upward pump waste code: 16473 Tray only code: 16472

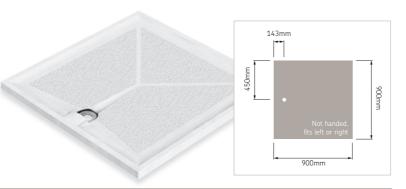


Braddan - 1000 x 700

Compatible shower screens:

A C E H HF M SE SM

Tray with gravity waste code: 16000W Tray with upward pump waste code: 16083 Tray only code: 16000

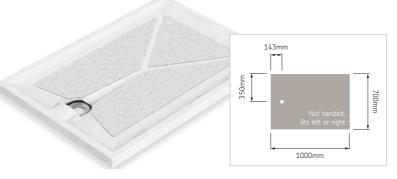

Braddan - 1000 x 1000


Compatible shower screens:

BF C E H HF M SE SM

GA GB

Tray with gravity waste code: 16071W Tray with upward pump waste code: 16168

Tray only code: 16071

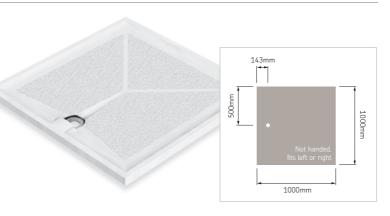

Braddan - 1200 x 650

Compatible shower screens:



Tray with gravity waste code: 16360W Tray with upward pump waste code: 16361

Tray only code: 16360


Braddan - 1200 x 700

Compatible shower screens:

A B C D E H HF K M N SE SJ SM SN SU SX SY GA GB

Tray with gravity waste code: 16006W Tray with upward pump waste code: 16090

Tray only code: 16006

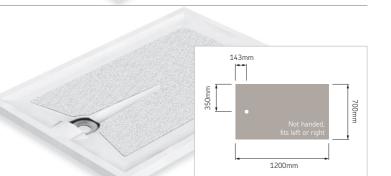




Compatible shower screens:

SE SJ SM SN SU SX GA GB

Tray with gravity waste code: 16012W Tray with upward pump waste code: 16175 Tray only code: 16012

Not suitable for use with standard screens a pipe duct kit




Braddan - 1200 x 820

Compatible shower screens:


SM SN SU SX SY GA GB Tray with gravity waste code: 16045W

Tray with upward pump waste code: 16135 Tray only code: 16045

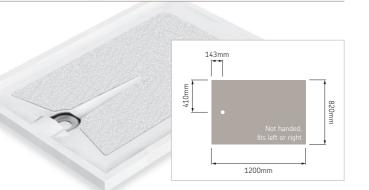


Braddan - 1200 x 900

Compatible shower screens:



Tray with gravity waste code: 16520W Tray with upward pump waste code: 16521 Tray only code: 16520

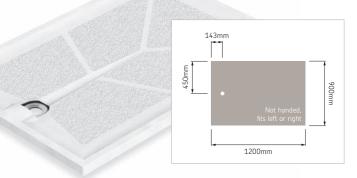



Braddan - 1300 x 700

Compatible shower screens:



Tray with gravity waste code: 16013W Tray with upward pump waste code: 16100

Tray only code: 16013


Braddan - 1300 x 820

Compatible shower screens:

C E H HF J M N U Y SE SJ SM SN SU SX SY GA GB

Tray with gravity waste code: 16050W Tray with upward pump waste code: 16141

Tray only code: 16050

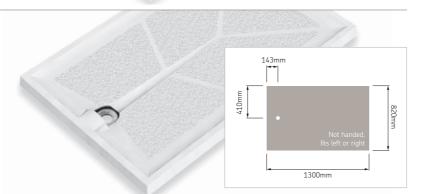


Braddan - 1420 x 700

Compatible shower screens:

Tray with gravity waste code: 16022W Tray with upward pump waste code: 16109

Tray only code: 16022

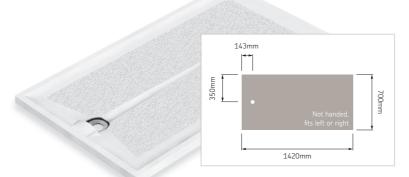


Braddan - 1420 x 820

Compatible shower screens:

Y SE SJ SM SN SX SY GA GB

Tray with gravity waste code: 16058W Tray with upward pump waste code: 16150 Tray only code: 16058

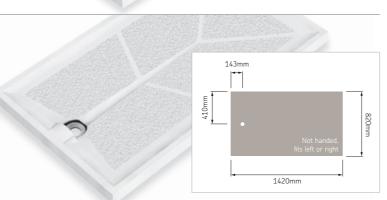


Braddan - 1500 x 700

Compatible shower screens:

B H HF N P TT X Z SE SJ SM SN SU SX SY GA GB

Tray with gravity waste code: 16495W Tray with upward pump waste code: 16496

Tray only code: 16495

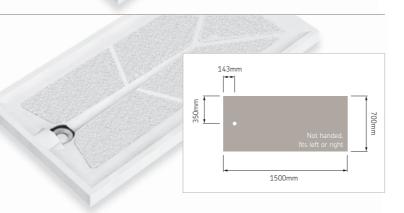

Braddan - 1700 x 700

Compatible shower screens:



Tray with gravity waste code: 16028W

Tray with upward pump waste code: 16121

Tray only code: 16028

143mm 1700mm

Braddan - 1800 x 700


Compatible shower screens:

H HF P TT Z SJ SN SU SX GA GB

Tray with gravity waste code: 16039W

Tray with upward pump waste code: 16129 Tray only code: 16039

Trim-to-length kit included - can be cut down to 1500mm



Braddan - 1800 x 820

Compatible shower screens:




SU SX GA GB

Tray with gravity waste code: 16065W

Tray with upward pump waste code: 16161

Tray only code: 16065

Trim-to-length kit included - can be cut down to 1500mm



Trim-to-length installations

Braddan - 1800 x 700

1800 x 700 trim-to-length Braddan trays are manufactured from SMC and are supplied with a separate end cap. If the trays need to be reduced in size to fit into an alcove the end cap then needs to be sealed to the cut end prior to the tilling flange being fitted.


Braddan - 1800 x 820

 $1800\ x\ 820\ trim-to-length$ Braddan trays are manufactured from GRP. The trim-to-length kit comprises of two lengths of aluminium extrusion. The first piece is secured to the underside of the cut end of the tray. This is then secured into the wall. The second section is then secured over the first and sealed on top of the tray prior to tiling to provide a water tight seal



Screen options

All screens include curtain rail, curtain, gliders and fixings.







Glass shower screens

see pages 124 to 125

* Please note: for options J, M, N & U, curtain rails are supplied to be cut-to-length on site.



OPTION BF SCREEN See page 98

OPTION H SCREEN

See page 102

OPTION M SCREEN*

See page 106


for option SM see page 128



OPTION C SCREEN See page 99

OPTION HF SCREEN

See page 103








See page 104 for option SJ see page 127



OPTION N SCREEN* See page 107 for option SN see page 129



OPTION U SCREEN* See page 110 for option SU see page 130



OPTION X SCREEN See page 111 for option SX see page 131





OPTION A SCREEN See page 96



See page 100



OPTION J SCREEN*



OPTION P SCREEN See page 108




OPTION Y SCREEN See page 112 for option SY see page 132



OPTION B SCREEN See page 97





OPTION E SCREEN See page 101 for option SE see page 126



OPTION K SCREEN See page 105




OPTION TT SCREEN See page 109 for option SU see page 130




OPTION Z SCREEN See page 113

Level Best® screen options

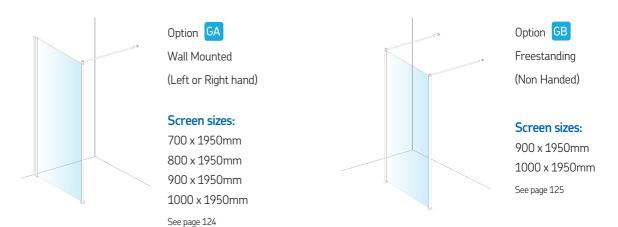


Level Best® combination options

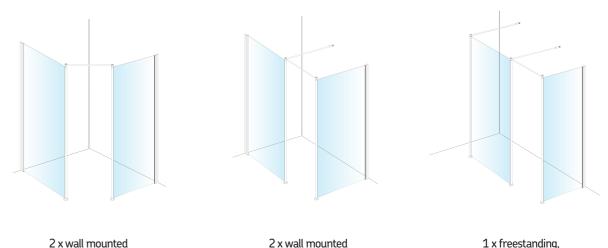

& wall braced

Silverdale screen options

with tie bar

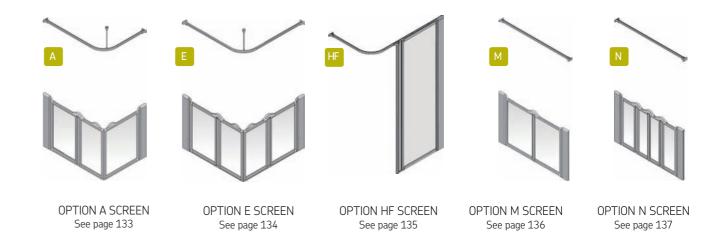







SU

1 x wall mounted


Screeded floor installation

Upward Discharge Waste.

Level access.


Trays need to be supported on all four sides underneath. No underfoam required.

Braddan installed in a screed on concrete beams or solid concrete using an AKW Archimedes 4 Pump Kit with a factory fitted AKW Upward Discharge Waste. Trays are shown in colour for

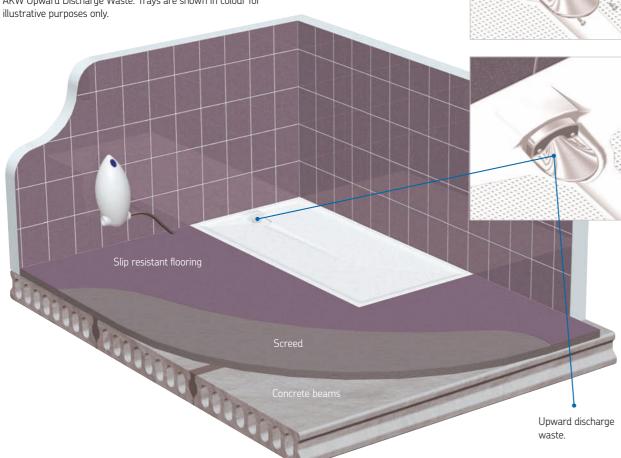

The upward discharge unit can

be opened for easy cleaning.

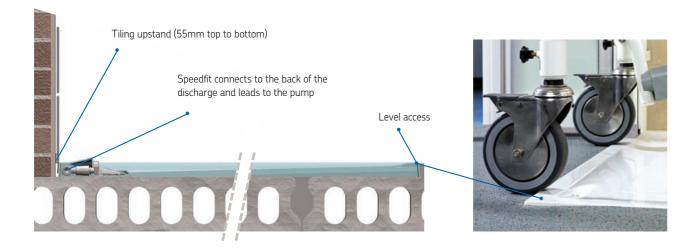

Trays are shown in colour for illustrative purposes only.

Concrete floor installation


Standard 50mm Pumped Waste.


Low level access.


Trays need to be supported on all four sides underneath. No underfoam required.

Braddan installed on concrete floor. This installation features the AKW Standard 50mm Pumped Waste, alternatively, the factory fitted AKW Upward Discharge Waste can be specified. Ramp available (40mm).

The standard pump waste unit with built in filter can be opened for easy cleaning. Standard pump waste recessed slightly into the concrete floor. Depth below tray: 38mm Ramp system is very suitable for wheelchair use. Shown through section and fixings. Trays are shown in colour for illustrative purposes only.



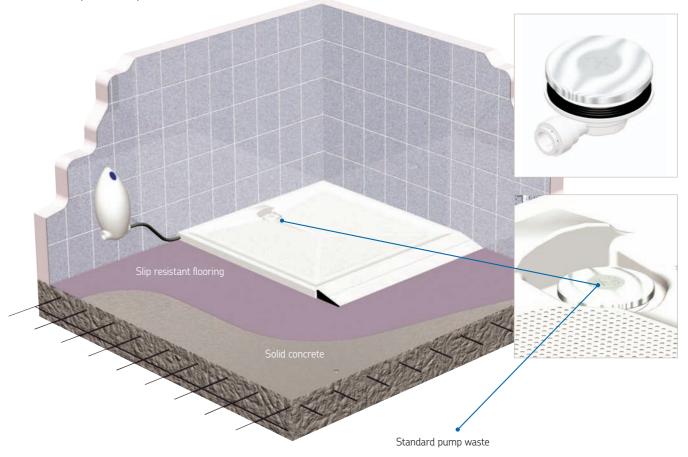

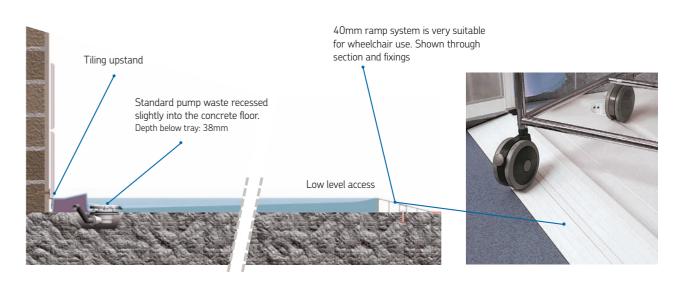

Trays are shown in colour for illustrative purposes only.

Wooden floor installation

Standard 50mm Gravity Waste.


Low level access.

Trays need to be supported on all four sides underneath and with cross braces.

No underfoam required.

Braddan inset onto joists in a wooden floor, featuring the AKW 20mm Ramp Kit and the AKW Standard 50mm Gravity Waste.

PLEASE NOTE: Although many customers fit Braddan trays on wooden floors without difficulty it is important to check that

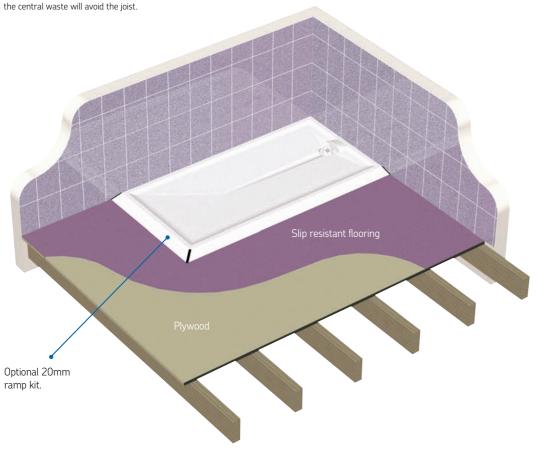


Standard top clearing trapped waste.





Standard top clearing trapped waste, can be opened for easy cleaning.



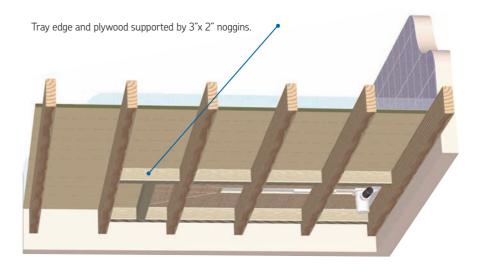

Waste options

For shower waste options see pages 158-167.

PW50 50mm standard pumped waste

Issued as standard with both automatic and automatic mixer valve pump kits.

- · Good seals and location
- Quieter running
- Built-in filter
- Opens for easy cleaning and rodding
- 38mm deep below mounting surface
- 15mm & 22mm John Guest Speedfit outlets available

Patent GB2375479










15mm Product Code: 25122

22mm Product Code: 25405

AKW Upward Discharge Waste: Patent Pending. Factory Fitted

Standard gravity wastes







AKW Standard 19mm Gravity Waste: Patent Pending. Code: 25125


Ramp kits


Aluminium 20/40mm

Braddan ramp kits allow easy wheelchair access and are available for surface mounted or semi recessed trays in 20mm and 40mm heights. Ramps kits are supplied for corner or straight access and can be cut to size on site.


Aluminium ramps description	Product code
20mm straight ramp (length 1800mm)	25000
40mm straight ramp (length 1800mm)	25002
20mm corner ramp (1045 x 1045mm)	25001
40mm corner ramp (1045 x 1045mm)	25003

Notes: Other corner ramps can be supplied bespoke as a special. Actual height for 20mm ramp is 19.4mm. Actual height for 40mm ramp is 38.5mm.

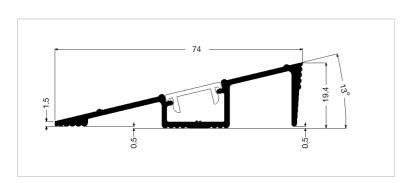

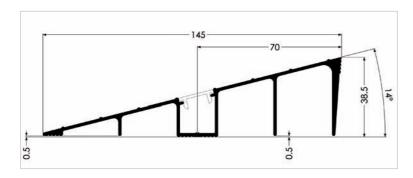





Features at a glance







Suitable for Complete level access concrete and screeded floor



Surface mounted (40mm high)



Slip resistant surface




Central waste (non handed fits left or right)

Pipe duct kits

Available separately pipe duct kits fit on to the edge of the tray to avoid re-routing of existing pipework.

- Fully waterproof mouldings
- Quick installation
- Substantial savings on time and labour costs
- Requires extra wide compensator (see below)

Kit 1 contents	Product code
1 x 1800mm pipe duct 2 x Plastic end caps	25038
Kit 2 contents	Product code

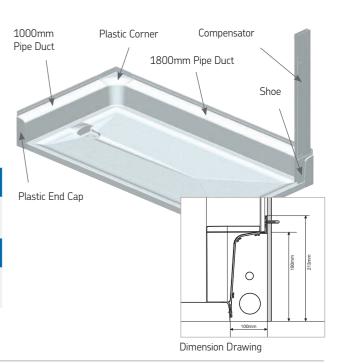

Extra wide compensator

Designed to give approximately 50mm additional width to a standard shower screen enclosure area. Also for use with a pipe duct kit or where pipes have been boxed in.

Width: 105mm

Height: 750mm, 900mm or 1870mm

Description		Product code
750mm	Non handed	24130
750mm	Left (short)*	24131
750mm	Right (short)*	24132
900mm	Non handed	24133
900mm	Left (short)*	24134
900mm	Right (short)*	24135
1870mm	Non handed	24136
1870mm	Left (short)*	24137
1870mm	Right (short)*	24138

^{*} For use with Pipe duct kits

Corner fitting









Trim to length



Rising butt screen hinges



In-line magnetic door closers



Corner magnetic door closers







Mullen®

Using patented integrated edging and built-in features, Mullen® is quick and easy to fit – and a delight to use

Benefits

- Level showering for easy access
- Exceptionally watertight seals, thanks to a pioneering Intergrip® strip
- Quick draining, with a 25mm fall inside tray
- Unrivalled strength and stability, using compressed GRP
- Pre-formed fixing holes ensure quick and easy installation
- Excellent choice of screens, curtains and rails

Features

- A 27mm floor recess is all that's needed
- Surface mounted option (ramp available)
- A corner waste position helps avoid joists
- Corner and alcove trays are supplied with cut-to-length kits
- Built in tiling upstands on 2 or 3 sides complete the all-round integrity of the water seals
- Floor tiling and alcove adaptor kits are available
- No under tray foaming is needed

- 1 Close Coupled Dual Flush Toilet with Spatula Flush
- 2 White Ergonomic Toilet Seat
- 3 Luda Twist® White
- 4 Natural Grip Grab Rail
- 5 Option H Screen Set
- 6 Mullen® Tray
- 7 Chrome Lever Taps
- 8 450mm Wash Basin And Semi Pedestal

Features at a glance



































Tray only code: 26100

Tray with gravity waste code: 26074 Universal floor tiling adaptor kit code: 26259

Corner installations only

Mullen® standard length – 1200 x 700

Mullen® standard length – 1000 x 1000

+ 50mm flange


Compatible shower screens:



Tray only code: 26101L 26101R

Tray with gravity waste code: 26106L 26106R

Universal floor tiling adaptor kit code: 26259 Corner installations only



Mullen® standard length – 1200 x 820


+ 50mm flange

Compatible shower screens:

E H HF SE SX SY GA GB

Tray only code: 26072L 26072R Tray with gravity waste code: 26073L 26073R Universal floor tiling adaptor kit code: 26259

Corner installations only




Mullen® standard length – 1300 x 700

+ 50mm flange

Compatible shower screens:



Tray only code: 26102L 26102R Tray with gravity waste code: 26109L 26109R Universal floor tiling adaptor kit code: 26259 Alcove adaptor kit code: 26262L 262621R

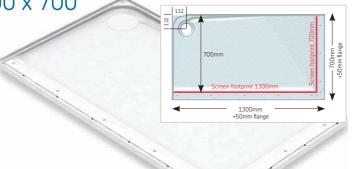

Mullen® standard length – 1300 x 820


+ 50mm flange

Compatible shower screens:



Tray only code: 26107L 26107R

Tray with gravity waste code: 26111L 26111R Universal floor tiling adaptor kit code: 26259 Alcove adaptor kit code: 26264L 26263R

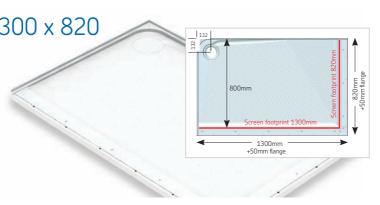

Mullen® standard length – 1420 x 700 + 50mm flange Compatible shower screens: B H HF J K N U X Y SE SJ SM SN SU SX SY GA GB Tray only code: 26104L 26104R Tray with gravity waste code: 26110L 26110R Universal floor tiling adaptor kit code: 26259





+ 50mm flange


Compatible shower screens:

Tray only code: 26103L 26103R Cut-to-length kit code: 26202L 26202R

Alcove adaptor kit code: 26262L 26261R

Universal floor tiling adaptor kit code: 26259

Alcove installations only, unsuitable for use with pipeduct kits Wastes blanked and recessed to suit 50mm or 90mm waste



Mullen® cut-to-length - 1800 x 700


+ 50mm flange

Compatible shower screens:



Tray only code: 26108 (non handed) Tray with gravity waste code: 26112 (non handed) Universal floor tiling adaptor kit code: 26259

Alcove installations only




Mullen® cut-to-length – 1800 x 820

+ 50mm flange


Compatible shower screens:





Tray with gravity waste code: 26193 (non handed) Universal floor tiling adaptor kit code: 26259

Alcove installations only




Screen options

All screens include curtain rail, curtain, gliders and fixings.



Sliding shower screens see pages 126 to 132



OPTION C SCREEN

See page 99


OPTION HF SCREEN

See page 103

* Please note: for options J, M, N & U, curtain rails are supplied to be cut-to-length on site.



OPTION BF SCREEN See page 98



OPTION A SCREEN See page 96




OPTION D SCREEN See page 100



OPTION B SCREEN See page 97



OPTION E SCREEN See page 101 for option SE see page 126



OPTION J SCREEN* OPTION K SCREEN



See page 104 for option SJ see page 127

OPTION P SCREEN

See page 108



OPTION TT SCREEN See page 109



OPTION H SCREEN

See page 102





OPTION U SCREEN* See page 110 for option SU see page 130




OPTION N SCREEN*

See page 107

for option SN see page 129


OPTION X SCREEN See page 111 for option SX see page 131




OPTION Y SCREEN See page 112 for option SY see page 132



Level Best® screen options

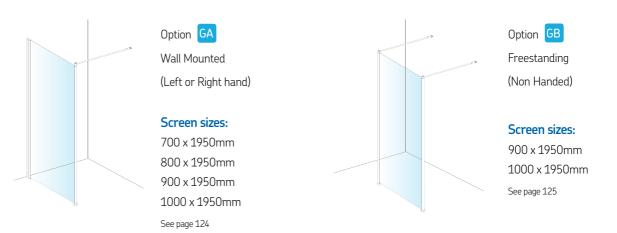

Level Best® combination options

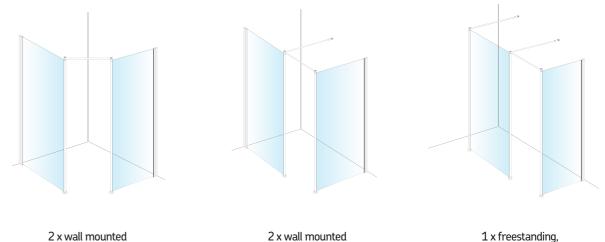



with tie bar


2 x wall mounted & wall braced


1 x freestanding, 1 x wall mounted

Silverdale screen options

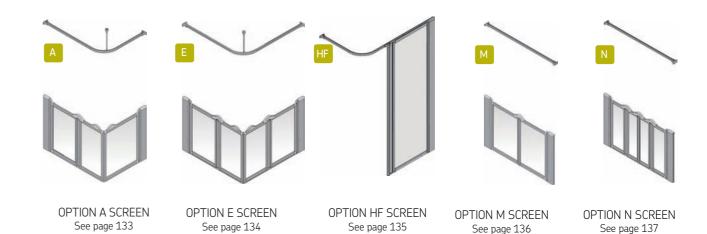

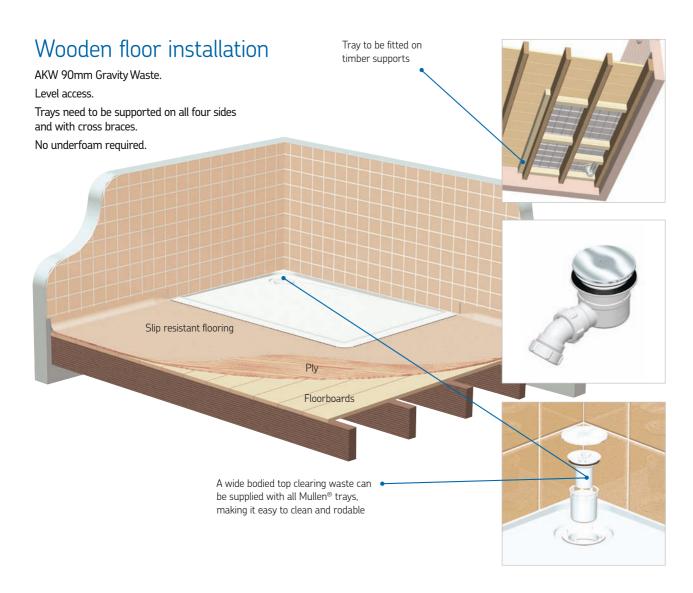

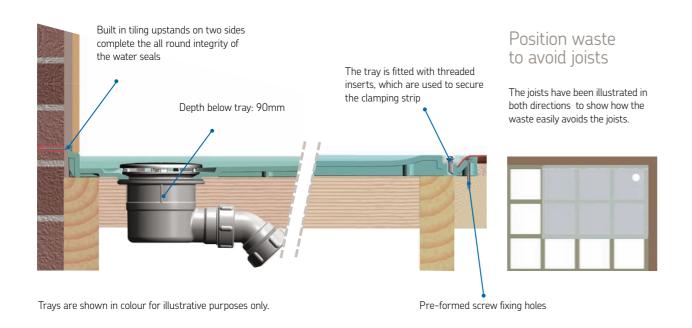

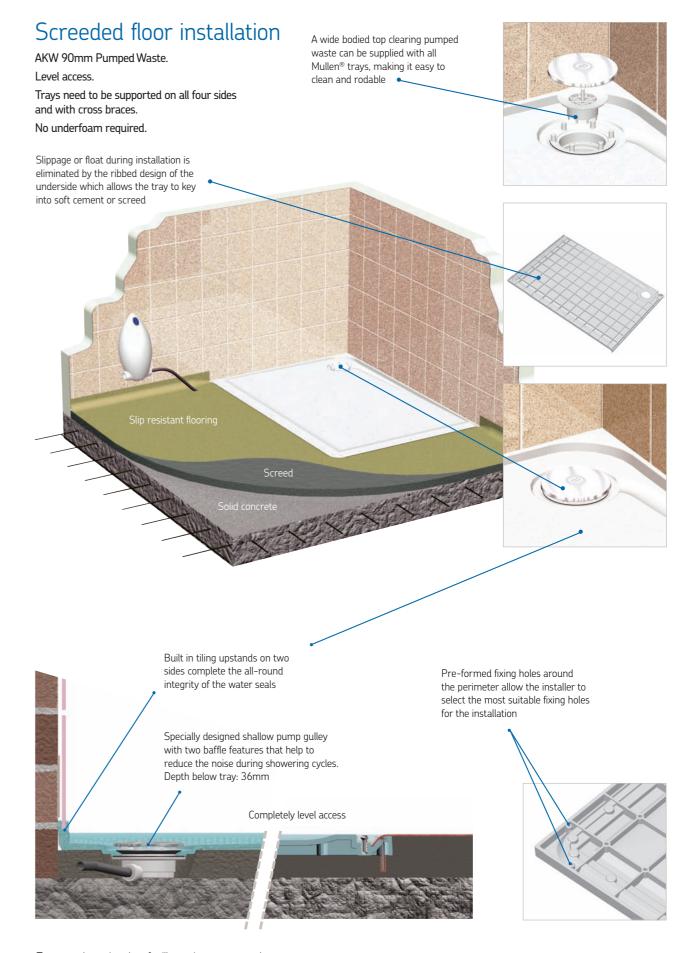



Trays are shown in colour for illustrative purposes only.

Mullen® cut-to-length feature

Alcove trays can be trimmed by up to 275mm on one side for 1524 x 762 and 1524 x 915 and on two sides for the 1800mm trays.


Specially designed stop ends are supplied to give a strong mechanical waterproof joint.

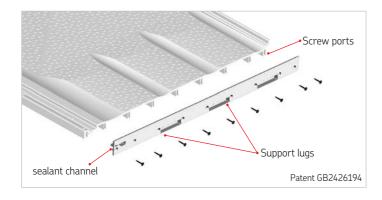



Clamping strip

The key benefit of the Mullen® shower tray is its unique clamping strip (Intergrip®) which grips and seals the vinyl flooring into the tray for a water tight seal. Flooring can be fitted after the tray and screen has been installed avoiding unnecessary extra site visits.



Clamping strip detail Typically floorboards are 18mm thick.

Please note it would be necessary to lay plywood on the bathroom floor to bring the floor up to the tray height, for complete level access.



Waste options



GW90

90mm dia. Gravity Waste Patent GB2418355 Code: 25120



PW90

90mm dia. Pumped Waste (15mm & 22mm) Patent GB2375479 Code: 25105 (15mm)

Code: 25406 (22mm)



Low depth GW90

Low depth 90mm Gravity Waste Patent pending code: 25404

Floor tiling kits

Available separately to maintain level access showering when using floor tiles. Fits under the Mullen® tray clamping strip and tile.

- Fully waterproof mouldings
- Quick installation
- Substantial savings on time and labour costs on site
- Provide a watertight seal
- Maximum thickness of tiles and adhesive 10.5mm

(Patent pending)

Kit 1 contents	Product code		
1 x 1800mm tiling adaptor strip 1 x 1000mm tiling adaptor strip 1 x Corner block assembly 1 x Pack of fixings and caps	26259		
Kit 2 contents	Product code		
1 x 1524mm tiling adaptor strip	25258		



Wallboard adaptor kit

Available separately to allow easy fitting of 11mm thick wall board. Attaches directly to the Mullen's® built in tiling flange.

- Mitre cut ends
- Quick installation
- Substantial savings on time and labour costs on site
- Should be used with wetfloor screens

Description	Product code
1 x 1800mm length 1 x 1000mm length 2 x Plastic end caps	26270





Alcove adaptor kits

Available separately to convert a corner tray to an alcove tray. Kits fit on to the edge of the tray to give a watertight seal and tiling upstand

Kit Contents:

- 1 x Alcove Adaptor strip
- 1 x Corner Block Assembly
- 1 x Pack of fixings and caps

Sizes available:

1300 x 700mm	Product code
Right hand tray	26261
Left hand tray	26262
1300 x 820mm	Product code
Right hand tray	26263

Corner Block	9
	Adaptor strip Patent Pending
1420 x 700mm	Product code

1420 x 700mm	Product code
Right hand tray	26261
Left hand tray	26262

Ramps





Mullen® trays can be surface mounted on screeded floors with the addition of trimmable ramp options for easy access. Ramps can be installed above or below altro flooring.

Ramps description	Product code
Mullen® surface mount ramp alcove kit 1500mm	26271
Mullen® surface mount ramp universal kit 1800x1000mm	26272
Mullen® under floor covering universal ramp kit 1800x1000mm	26273

Features at a glance







concrete and

screeded floor

Complete level access







Slip resistant surface



Corner waste on standard trays (handed)


Pipe duct kits

Available separately pipe duct kits fit on to the edge of the tray to avoid re-routing of existing pipework.

- Fully waterproof mouldings
- Quick installation
- Substantial savings on time and labour costs
- Requires extra wide compensator (see below)

Kit 1 contents	Product code
1 x 1800mm pipe duct 2 x Plastic end caps	26265
Kit 2 contents Product	
1 x 1000mm pipe duct	26266



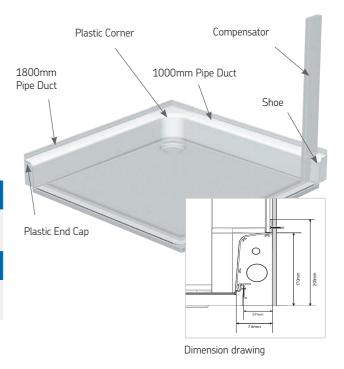

Extra wide compensator

Designed to give approximately 50mm additional width to a standard shower screen enclosure area. Also for use with a pipe duct kit or where pipes have been boxed in.

Width: 105mm

Height: 750mm, 900mm or 1870mm

Description		Product code
750mm	Non handed	24130
750mm	Left (short)*	24131
750mm	Right (short)*	24132
900mm	Non handed	24133
900mm	Left (short)*	24134
900mm	Right (short)*	24135
1870mm	Non handed	24136
1870mm	Left (short)*	24137
1870mm	Right (short)*	24138

^{*} For use with Pipe duct kits



Corner fitting





Rising butt screen

hinges





In-line magnetic



Corner magnetic





Trim to length (cut to length trays only) Kit supplied

door closers

wooden floor



Sulby

Designed for easy installation onto unbreachable floors, the Sulby can go where others can't

Benefits

- Low entry step in tray for a defined showering area
- Many flexible features make for simple fitting
- Excellent drainage (35mm fall inside tray)
- Choice of corner, side and end ramps for easy access
- No messy pipework, improving the looks

Features

- Patented above floor gravity waste with 8 possible outlet points
- Non handed fits left or right
- Tiling flange supplied for alcove installations
- Optional pipe duct kit available
- No under tray foaming required
- Trim-to-length kit supplied with 1800mm trays
- In-built above floor gravity waste
- Adjustable watertrap of 31mm or 38mm

- 1 500mm Washbasin and Full Pedestal
- 2 Chrome Lever Taps
- 3 Option E Screen Set
- 4 Sulby Tray
- 5 Luda Twist® White
- 6 90° Fluted White Grab Rail
- 7 Close Coupled Dual Flush Toilet with Spatula Flush

Features at a glance



























Compatible shower screens:



Tray with gravity waste code: 17232



Sulby - 900 x 900

90mm high

Compatible shower screens:



Tray with gravity waste code: 17231



Sulby - 1000 x 1000

90mm high

Compatible shower screens:



Tray with gravity waste code: 17055




Sulby - 1200 x 700

90mm high

Compatible shower screens:

A B C D E H HF K M

Tray with gravity waste code: 17000

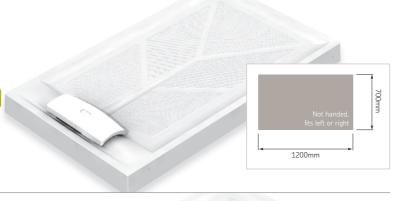

Sulby - 1200 x 760

90mm high

Compatible shower screens



SE SJ SM SN SU SX GA GB

Tray with gravity waste code: 17006

with standard screens when fitted with a pipe duct kit



Sulby – 1800 x 700

90mm high

Compatible shower screens:



SU SX GA GB

Tray with gravity waste code: 17023

Trim-to-length kit included - can be cut down to 1500mm



Sulby - 1800 x 820 90mm high Compatible shower screens: H HF P TT Z SJ SN

Tray with gravity waste code: 17049

Trim-to-length kit included - can be cut down to 1500mm



110mm high

SU SX GA GB

Compatible shower screens:



Tray with gravity waste code: 17202




Sulby - 1420 x 700

110mm high

Compatible shower screens:

SE SJ SM SN SU SX SY GA GE

Tray with gravity waste code: 17201

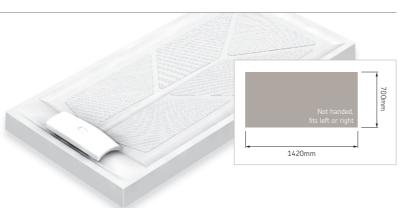

Ramps & steps








Ramps / steps description	Dimensions	Product code
1. Straight ramp for Sulby trays	770 (w) x 480 (d) x 90 (h)	25009
2. Corner ramp for Sulby trays	770 (w) x 630 (d) x 90 (h)	25008
3. Step for Sulby trays	720 (w) x 300 (d) x 45 (h)	25007

Gradient for ramps 1:6

NOTE: Dimensions are outside dimensions

Sulby waste installation

Three different waste directions are available for ease of installation.

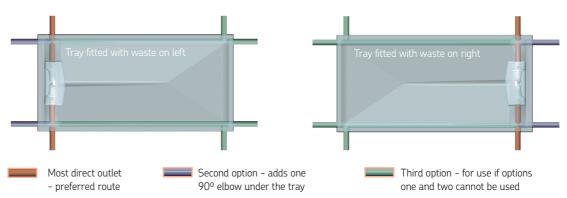


SULBY EXIT HEIGHTS:


90mm Sulby Tray exit height is 60mm high at waste end 110mm Sulby Tray exit height is 80mm high at waste end




Screen options

All screens include curtain rail, curtain, gliders and fixings.







Glass shower screens

see pages 124 to 125


* Please note: for options J, M, N & U, curtain rails are supplied to be cut-to-length on site.




OPTION BF SCREEN See page 98



OPTION C SCREEN See page 99



See page 96



OPTION B SCREEN See page 97



OPTION D SCREEN See page 100




OPTION E SCREEN See page 101 for option SE see page 126



OPTION HF SCREEN See page 103

SN



OPTION J SCREEN* See page 104 for option SJ see page 127

OPTION P SCREEN

See page 108



OPTION K SCREEN See page 105



OPTION H SCREEN

See page 102






OPTION U SCREEN* See page 110 for option SU see page 130



OPTION N SCREEN*

See page 107

OPTION X SCREEN See page 111 for option SX see page 131



OPTION Y SCREEN See page 112 for option SY see page 132




OPTION TT SCREEN


See page 109

OPTION Z SCREEN See page 113

Level Best® screen options

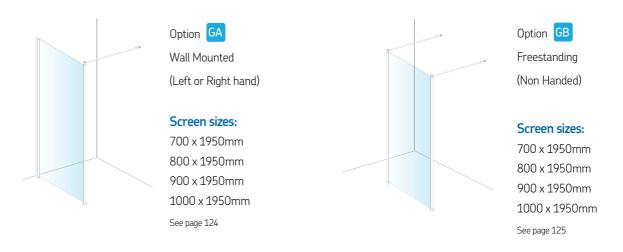

Level Best® combination options

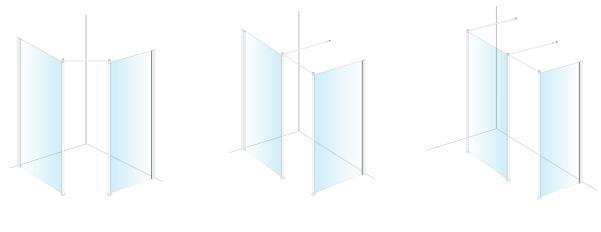


2 x wall mounted with tie bar

2 x wall mounted & wall braced

1 x freestanding, 1 x wall mounted

Silverdale screen options

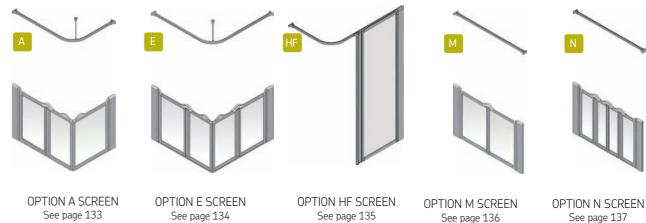

See page 135

See page 134



See page 137

Solid concrete installation: suitable also for timber floor installations

- Built-in waste
- Low level access
- Trays need to be supported on all four sides
- No underfoam required
- Tiling upstands provided for greater water retention and integrity


All AKW Sulby trays have a built in

Pipe duct kits Also suitable for timber floor installations

Available separately pipe duct kits fit on to the edge of the tray to avoid re-routing of existing pipework

- Fully waterproof mouldings
- Quick installation
- Substantial savings on time and labour costs
- Requires extra wide compensator (see below)

Kit 1 contents	Product code
1 x 1800mm pipe duct 2 x Plastic end caps	25038
Kit 2 contents	Product code
1 x 1000mm pipe duct 1 x Plastic corner assembly	25039

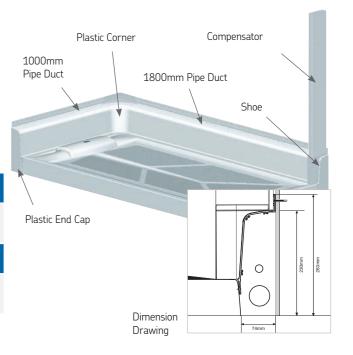

31mm gravity waste, set above floor level.

An adaptor is provided to make up to 38mm. This gives a 38mm water capacity and 35mm fall on exiting the tray.

Sulby waste drawings



ABS cover lifts off to expose waste.



Trap and strainer are removed to give clear access for rodding if required.



A stop end is supplied for fitting to the unused waste outlet.

Weir allows for 31 – 38mm trap

Extra wide compensator

Designed to give approximately 50mm additional width to a standard shower screen enclosure area. Also for use with a pipe duct kit or where pipes have been boxed in.

Width: 105mm

750mm, 900mm or 1870mm Height:

Description		Product code
750mm	Non handed	24130
750mm	Left (short)*	24131
750mm	Right (short)*	24132
900mm	Non handed	24133
900mm	Left (short)*	24134
900mm	Right (short)*	24135
1870mm	Non handed	24136
1870mm	Left (short)*	24137
1870mm	Right (short)*	24138

^{*} For use with Pipe duct kits



Features at a glance



Suitable for wooden floor



Suitable for

screeded floor

Suitable for

concrete floor





Slip resistant surface



Central waste (non handed)



Corner fitting



Trim to length (1800mm only)



Rising butt screen hinges



In-line magnetic door closers



Corner magnetic door closers





Alcove fitting





Multi Spec

If you're not sure what the final installation conditions will be, the flexibility of the Multi Spec tray is the ideal solution

Benefits

- Multi Spec trays can provide level access or be surface mounted for low entry
- Total flexibility means you can fit most spaces
- Strong, with built in reinforced steel sections
- A 35mm fall inside the tray gives excellent drainage
- Slip resistant surface for added safety
- Wide choice of screens, curtains and rails

- Suitable for all floor types and alcove installations
- Integral pipe duct system avoids re-routing pipework (as shown on page 73)
- Optional upward discharge system
- No under tray foaming required

- 1 White Fold Up Support Rail
- 2 Close Couple Dual Flush Toilet with Spatula Flush
- 3 Ergonomic White Toilet Seat
- 4 Option C Screen Set
- 5 Multi Spec Tray
- 6 Luda® Shower Blue
- 7 1900 Series Fluted Grab Rail Blue
- 8 2000 Series Seat Blue
 - 9 500mm Wash Basin with Semi-Pedestal
 - 10 Chrome Lever Taps

Features at a glance
























Multi Spec - 1050 x 1050

Compatible shower screens:





Tray with standard gravity waste code: 19063 Tray with upward discharge waste code: 19066

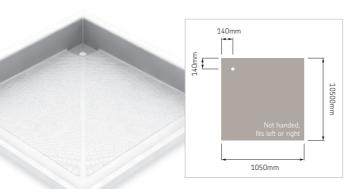


Multi Spec – 1250 x 750

Compatible shower screens:

A B C D E H HF K M N SE SM SN GB

Tray with standard gravity waste code: 19000L 19000R Tray with upward discharge waste code: 19012L 19012R




Multi Spec - 1350 x 750

Compatible shower screens:

U Y SE SJ SM SN SY GB

Tray with standard gravity waste code: 19013L 19013R Tray with upward discharge waste code: 19023L 19023R




Multi Spec – 1470 x 750

Compatible shower screens:

B H HF J K N U X Y SJ SN SX SY GB

Tray with standard gravity waste code: 19033L 19033R Tray with upward discharge waste code: 19041L 19041R




Multi Spec - 1850 x 750

Compatible shower screens

H HF P SJ GB


Tray with standard gravity waste code: 19049L 19049R Tray with upward discharge waste code: 19056L 19056R Trim-to-length kit included - can be cut down to 1500mm



Screen options


All screens include curtain rail, curtain, gliders and fixings.

Standard shower screens see pages 96 to 113



Sliding shower screens see pages 126 to 132

* Please note: for options J, M, N & U, curtain rails are supplied to be cut-to-length on site.





OPTION H SCREEN

See page 102

OPTION M SCREEN*

See page 106

for option SM see page 128

See page 99

OPTION HF SCREEN


See page 103



OPTION A SCREEN See page 96



See page 100



See page 97



OPTION E SCREEN See page 101 for option SE see page 126




OPTION J SCREEN* See page 104 for option SJ see page 127



OPTION P SCREEN See page 108



See page 105



OPTION U SCREEN* See page 110



OPTION X SCREEN See page 111 for option SX see page 131



OPTION N SCREEN*

See page 107


for option SN see page 129

OPTION Y SCREEN See page 112 for option SY see page 132



900 x 1950mm 1000 x 1950mm

See page 125






Wooden floor installation


AKW Standard Gravity Waste.

Low level access.

Multi Spec installed in a wooden floor. The tray sits on the joists, the waste position avoids the joists whichever way they run. The 20mm ramp system fitted gives very low level entry. The standard gravity waste is fitted on this installation.

and with cross braces.

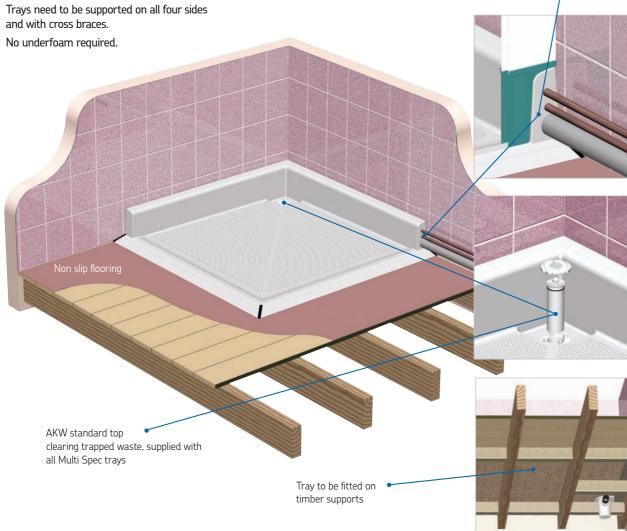

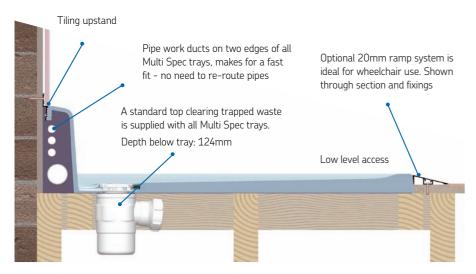

Waste position avoids joists

The Multi Spec tray (below) shown fitted to a wooden floor. The joists have been illustrated in both directions to show how the waste easily avoids the joists. The Multi Spec can also be surface mounted.

Integral pipe duct

All Multi Spec trays incorporate a special pipe work duct to


avoid re-routing pipework. The plastic moulding fits to mount

the screen compensator is easily waterproofed (shown in green below). The large pipe duct on two sides of the tray makes it

unlikely that wall mounted pipe work previously sited below the

bath will have to be moved. This allows fast installation with

substantial savings on time and labour costs.



waste can be specified. Also featured is the optional 40mm ramp system. Trays need to be supported on all four sides and with cross braces. No underfoam required.


Concrete floor installation

Multi Spec surface mounted on a concrete floor, using either the standard pump

waste featured below or alternatively the factory fitted upward discharge pump

AKW Standard Pumped Waste.

Low level access.

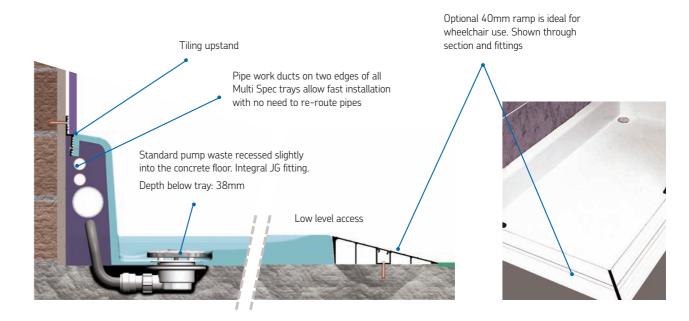

Trays are shown in colour for illustrative purposes only

Trays are shown in colour for illustrative purposes only





For shower waste options see pages 158-167.



AKW Standard 50mm **Gravity Waste** Code: 25126



AKW Standard Pumped Waste (15mm & 22mm) Code: 25122 (15mm) Code: 25405 (22mm)



AKW Standard 19mm **Gravity Waste** Code: 25125

Discharge Waste Factory fitted

Integral pipework duct

The Multi Spec tray has the advantage of a large integral pipe work duct on two sides as standard.

Not only does this help to avoid the re-routing of pipework but it also allows faster installation providing substantial cost savings on time and labour.





Ramp kits


Aluminium 20/40mm

Braddan ramp kits allow easy wheelchair access and are available for surface mounted or semi recessed trays in 20mm and 40mm heights. Ramps kits are supplied for corner or straight access and can be cut to size on site.

Aluminium ramps description	Product code
20mm straight ramp (length 1800mm)	25000
40mm straight ramp (length 1800mm)	25002
20mm corner ramp (1045 x 1045mm*)	25001
40mm corner ramp (1045 x 1045mm*)	25003







*Outside dimensions



Trim to length

Corner fitting

Alcove fitting

(1850mm only)



Rising butt screen

hinges

In-line magnetic

door closers



Corner magnetic door closers



72 Product catalogue 2011/12

Features at a glance

Tiling upstand

and labour costs

Screeded floor installation

Multi Spec installed in a screed on concrete beams or solid concrete, using upward discharge waste. This type of installation achieves complete level access, leaving

AKW Upward Discharge Waste.

the concrete beams undisturbed. Trays need to be supported on all four

sides and across the centre.

Level access.

No underfoam required.



Pipe work ducts on two edges of all Multi Spec trays allow fast installation with substantial savings on time

> Speedfit® connects to the back of the discharge and leads to the pump



Upward discharge waste

The upward discharge unit can be opened for easy cleaning

Trays are shown in

colour for illustrative purposes only

Suitable for Suitable for wooden floor screeded floor

Suitable for concrete floor

Surface mounted (40mm high)

Level access

Slip resistant surface





Low Profile

Suited to wooden floors and one of the easiest trays to install, Low Profile can be fitted for either level or low level access

- At just 32mm high, the Low Profile tray is ideal for where level or low access is needed
- Excellent water drainage with a 25mm fall inside the tray
- Reinforced with steel sections for extra strength
- A large selection of screens, curtains and rails give real choice
- Slip resistant surface for added safety
- Robust and easy to clean

Features

- Easy installation, thanks to offset waste position
- 'Non handed' it fits left or right
- 1800mm trays supplied with a trim to length kit
- No under tray foaming required
- Tiling flange supplied
- Pipe duct kits available

Please note. Low Profile is for use only with gravity wastes, and NOT for pumped wastes.

- 1 500mm Wash Basin and Semi Pedestal
- 2 Chrome Lever Taps
- 3 Option U Screen Set
- 4 Low Profile Tray
- 5 Luda® Twist White
- 6 Fluted Grab Rail White
- 7 Close Coupled Dual Flush Toilet and Spatula Flush Handle

Features at a glance











































Low Profile - 1300 x 820











Screen options

All screens include curtain rail, curtain, gliders and fixings.







Glass shower screens

* Please note: for options J, M, N & U, curtain rails are supplied to be cut-to-length on site.



OPTION BF SCREEN See page 98

OPTION H SCREEN

See page 102



OPTION C SCREEN See page 99


OPTION HF SCREEN

See page 103

OPTION N SCREEN*

See page 107

for option SN see page 129



OPTION D SCREEN See page 100

OPTION A SCREEN

See page 96




See page 97



OPTION E SCREEN See page 101 for option SE see page 126



OPTION J SCREEN* See page 104 for option SJ see page 127



OPTION K SCREEN See page 105



OPTION P SCREEN See page 108



See page 109




OPTION M SCREEN*

See page 106


for option SM see page 128

OPTION U SCREEN* See page 110 for option SU see page 130



SN


OPTION X SCREEN See page 111 for option SX see page 131




OPTION Y SCREEN See page 112 for option SY see page 132



Level Best® screen options

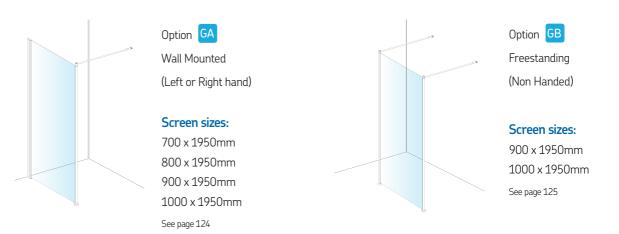

Level Best® combination options

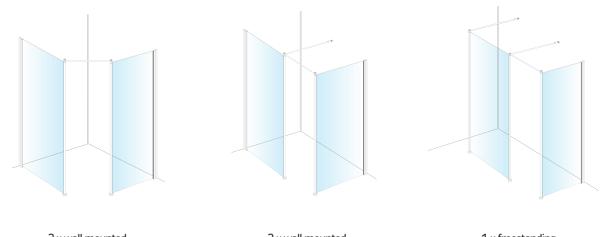


2 x wall mounted with tie bar

2 x wall mounted & wall braced

1 x freestanding, 1 x wall mounted

Silverdale screen options

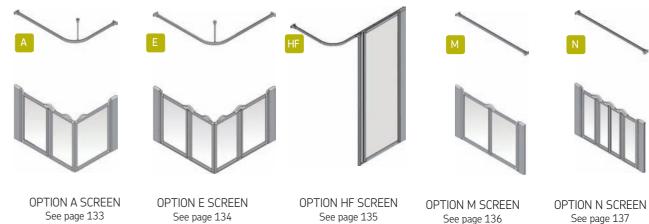

See page 134

See page 137

See page 135



Trays are shown in colour for illustrative purposes only

Features at a glance



wooden floor





Suitable for

screeded floor





(32mm high)





moves in two directions to avoid the

joists and pipework. Square trays

rotate in 90 degree increments for

four alternative waste positions

(non handed fits left or right)

Waste options

For shower waste options see pages 158-167.

GW90

90mm Diameter Gravity Waste Patent Pending, Code: 25120



Low depth GW90

Low depth 90mm Gravity Waste Patent pending code: 25404




Pipe duct kits

Available separately pipe duct kits fit on to the edge of the tray to avoid re-routing of existing pipework.

- Fully waterproof mouldings
- Quick installation
- Substantial savings on time and labour costs
- Requires extra wide compensator (see opposite)

Kit 1 contents	Product code
1 x 1800mm pipe duct 2 x Plastic end caps	25038
Kit 2 contents	Product code
1 x 1000mm pipe duct	

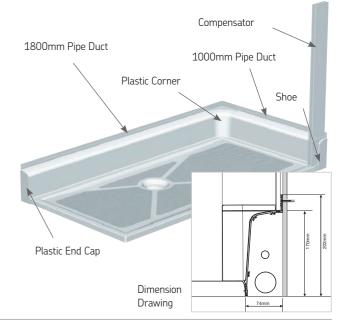


Extra wide compensator

Designed to give approximately 50mm additional width to a standard shower screen enclosure area. Also for use with a pipe duct kit or where pipes have been boxed in.

Width: 105mm

Height: 750mm, 900mm or 1870mm



Description		Product code
750mm	Non handed	24130
750mm	Left (short)*	24131
750mm	Right (short)*	24132
900mm	Non handed	24133
900mm	Left (short)*	24134
900mm	Right (short)*	24135
1870mm	Non handed	24136
1870mm	Left (short)*	24137
1870mm	Right (short)*	24138
*E ::1.5: 1	_	

^{*} For use with Pipe duct kits



Corner fitting



Alcove fitting



Trim to length

(1800mm only)

Rising butt screen

hinges







In-line magnetic door closers

Corner magnetic door closers





Keppel

Elegant and sophisticated Keppel tray is ideal for a modern bathroom

Benefits

- Exceptional water drainage, with a 30mm fall to waste
- Create the ideal enclosure with our selection of full or half height screens
- Extra safety, thanks to a slip resistant surface
- The surface mounted Keppel is easy to install and offers a low threshold and excellent water handling
- Suits all fitting needs, with five different tray sizes

Features

- Surface mounted
- Handed fits left or right
- Threshold height of 50-55mm

- 1 Stainless Steel Fold Up Support Rail
- 2 Close Coupled Dual Flush Toilet with Spatula Flush Handles
- 3 Keppel Tray
- 4 Stainless Steel Grab Rail
- 5 Arka Mixer Shower
- 6 Level Best Screen
- 7 500mm Wash Basin with full Pedestal
- 8 Chrome Lever Taps

Features at a glance





























Tray applications

Level best screens are also suitable to sit on AKW trays, fitting kit supplied as standard.





Waste options

For shower waste options see pages 158-167.





Low depth 90mm Gravity Waste Patent pending code: 25404



GW90

90mm diameter Gravity Waste Patent GB2418355 code: 25120



PW90

90mm diameter Pumped Waste Patent GB2375479 code: 25105 (15mm) code: 25406 (22mm)

Extra wide compensator

Designed to give approximately 50mm additional width to a standard shower screen enclosure area. Also for use with a pipe duct kit or where pipes have been boxed in.

105mm

750mm, 900mm or 1870mm






Screen options

All screens include curtain rail, curtain, gliders and fixings.

- Standard shower screens see pages 96 to 113
- Sliding shower screens
 - Silverdale shower screens see pages 126 to 132 see pages 133 to 141
- * Please note: for options J, M, N & U, curtain rails are supplied to be cut-to-length on site.





See page 99

OPTION N SCREEN*

See page 107

for option SN see page 129

See page 111





Glass shower screens

see pages 124 to 125

OPTION D SCREEN See page 100



See page 101 for option SE see page 126




OPTION A SCREEN

See page 96

OPTION E SCREEN

See page 105



See page 102

OPTION M SCREEN*

See page 106


for option SM see page 128

OPTION U SCREEN'

See page 110

OPTION B SCREEN


See page 97



OPTION HF SCREEN See page 103




See page 104 for option SJ see page 127





OPTION P SCREEN See page 108






OPTION X SCREEN OPTION Y SCREEN See page 112 for option SX see page 131 for option SY see page 132




See page 109 for option SU see page 130




Level Best® screen options

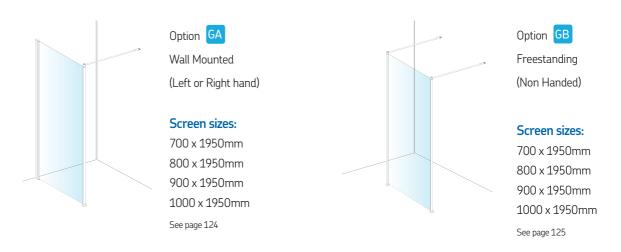

Level Best® combination options

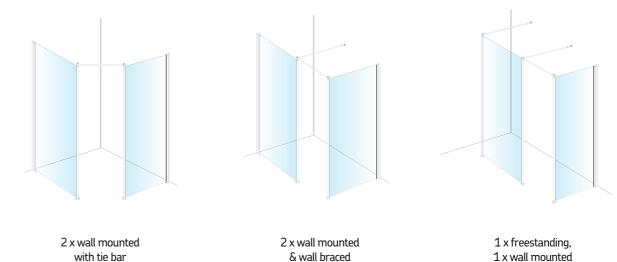

Silverdale screen options

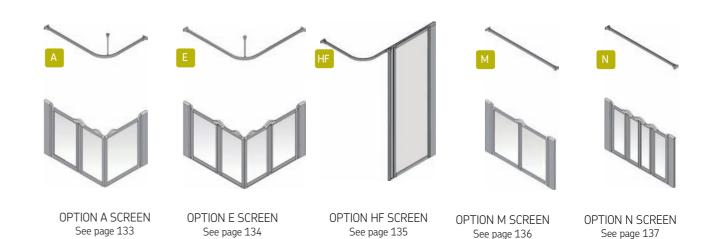



SX

Back catalogue traditional trays

Walker

(1525 x 713mm)

Tray & Gravity Waste: 22211L 22211R Tray & Upward Pump: 22215L 22215R

Super Walker

(1525 x 835mm)

Tray & Gravity Waste: 22221L 22221R Tray & Upward Pump: 22223L 22223R



Tray features:

- Surface mounted
- Upward discharge pumped waste system available
- Built-in pipework ducts
- Built-in curtain retainers
- Slip resistant surface
- Waste positioned to avoid joists
- Integral tiling flange
- Threshold height is 55mm
- Excellent water handling (35mm fall inside tray)
- All round floor fixing flange
- Suitable for wooden, concrete and screeded floors

Compatible screen options

All Walker, Super Walker, Wheeler and Super Wheeler screens are made to order, in option H or HF only

Wheeler

Length: 1549mm (Width w/ramp: 815mm. Width: 700mm) Tray & Gravity Waste: 22181L 22181R Tray & Upward Pump: 22185L 22185R

Super Wheeler

Length: 1549mm (Width w/ramp: 890mm, Width: 820mm)



Tray features:

- Surface mounted
- Integral ramp
- Upward discharge pumped waste system available
- Built-in pipework ducts
- Built-in curtain retainers
- Slip resistant surface
- Waste positioned to avoid joists
- Integral tiling flange
- Excellent water handling (28mm fall inside tray)
- All round floor fixing flange
- Threshold height 40mm
- Suitable for wooden, concrete and screeded floors

Compatible screen options

All Walker, Super Walker, Wheeler and Super Wheeler screens are made to order, in option H or HF only

Waste options

For shower waste options see pages 158-167.

- AKW Standard 19/50mm Gravity Waste (Patent GB2418355) Code: 25125 (19mm) 25126 (50mm)
- AKW Standard 50mm Pumped Waste (Patent GB2375479) Code: 25405 (22mm) 25122 (50mm)
- AKW Upward Discharge Waste (Patent Pending) Factory fitted

Traditional trays

Cut-to-length 700

(1800 x 850 x 700)

Tray & Upward Pump: 22008L 22008R Option H, HF & P Made to order

Cut-to-length 760

(1800 x 850 x 760)

Tray & Upward Pump: 22012L 22012R Option H, HF & P

Penta

(1532 x 742)

Tray & Gravity Waste: 22178L 22178R Tray & Upward Pump: to,pent2LU to.pent2RLU Option H & HF

Solihull

(1515 x 720)

Tray & Gravity Waste: 22201L 22201R Tray & Upward Pump: 22205L 22205R Option H & HF

Aguaduct 1800

(1800 x 700)

Tray only code: 22020L 22020R Option H, HF & P

Hi-med & Hi-lo

Hi-Med tray with gravity waste: 22231L 22231R

Hi-Lo tray with gravity waste: 22241L 22241R Option H & HF

Universal

(1570 x 880)

Option Y 900mm (gravity waste): 22131L/R Option Y 900mm (pumped waste): 22134L/R

Standard

External size (990 x 990)

Option BF 900mm (gravity waste): 22152L/R Option BF 900mm (pumped waste): 22156L/R Option BF 900mm (upward waste): 22156L/R

Douglas

(1480 x 760)

Options B, H, HF, K & Y

Erin

(960 x 960)

Options BF, C, E, & HF

Glen

(1300 x 760 or 1300 x 860)

Options H. HF. J. M. & N

Ramsev

(1195 x 830)

Option C, G, & HF

Inset Enclosure

(1170 x 760)

For shower waste option see pages 158-167

Topline Enclosure

(1265 x 960)

For shower waste option see pages 158-167

Pentacube Enclosure

(1650 x 780)

Tray & Upward Pump: 22124L 22124R Option H see page 102

Option HF see page 103

Stay-Dry

(1650 x 780)

Tray & Upward Pump: 22067L 22067R Options H & HF

Trim Flo

(1820 x 755)

Option A 900mm: 22057L/R Options H & HF

Easy Flo

(1120 x 820)

Option A 900mm: 22042L/R Options H & HF

Compact

(1532 x 742)

Tray with gravity waste: 22251 Tray, curtain & track with gravity waste: 22252

Optima

(External size 950 x 950)

Tray with gravity waste: 22256 Tray, curtain & track with gravity waste: 22257

lvne

(External size 950 x 950)

Tray and gravity waste: 22261L 22261R

Tuk-A-Way

(External size 955 x 820)

Tray and gravity waste: 22266 Tray, curtain & track with gravity waste: 22267

To find out more about back catalogue trays please call customer services





Shower Cubicles

Standalone

Ideal for any room or bedroom, AKW's standalone cubicles give you comfortable showering and a choice of options.


Benefits

- An excellent solution when bathroom can not be accessed
- Quick to install, causing minimum disruption
- Can be easily moved, giving flexibility if circumstances change
- An open sided option offers the perfect bath replacement for people who need the aid of a carer
- Grab rails supplied for easy access and use
- Ramp supplied (excluding side flow waste option)
- Washbasin pack and accessories can be added to provide a complete adaptation


Features

- All cubicles include tray, screen, waste, glazed ceilings, grab rail, curtain, rail, gliders & fixings
- An entry height of 40mm or 90mm means they're ideally suited for use with a ramp
- Suitable for above floor pumped, side flow waste and below floor gravity waste

Standalone Shower cubicles - 1200 x 700

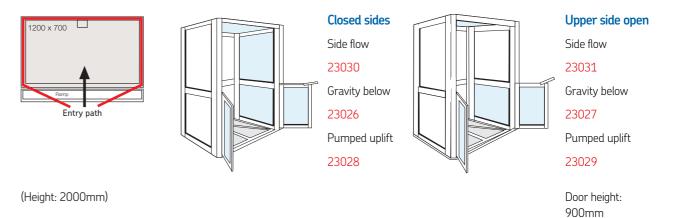

Standalone Shower cubicles – 1200 x 800

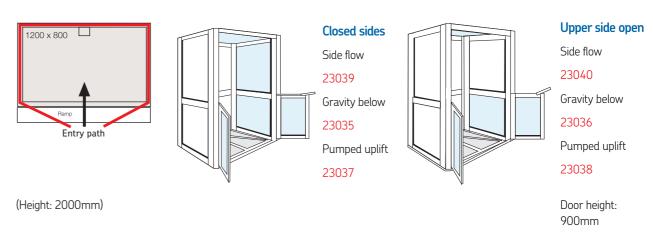

Other sizes available on request - please call customer services on 01905 823299

Waste & ramp options



Surface mounted / above floor (side flo)

Optional ramp / 45mm step



Above floor pumped waste

Ramp supplied as standard



gravity waste

Ramp supplied as standard



Shower Cubicles

Showerloo

AKW's showerloo can be located anywhere in the home to provide a cost effective permanent or temporary solution.

- Toilet and washbasin pack can be added to provide a complete adaptation
- Quick and easy to install giving a compact and multifunctional bathroom alternative
- Built-in ceiling helps retain moisture and protect home furnishings
- Ramp and grab rails are supplied for easy access and use


Features

- All cubicles include tray, screen, waste, glazed ceilings, grab bar, curtain, rail, gliders & fixings
- An entry height of 40mm or 90mm, suitable for use with a ramp
- Suitable for above floor pumped, side flow waste and below floor gravity waste

Showerloo cubicles


1200 x 700

Product code: 23026




1200 x 800

Product code: 23035



Access panels provide easy access to the cistern and are made up of:

- 1 x Access Panel (A)
- 2 x Magnetised Inner Compensators (B)
- 2 x Fixing Compensators (C)

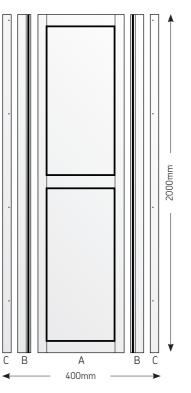

ACCESS PANEL

Pack options

Wall Hung WC Pack (with access panel) Code: 23100 Wall Hung WC Pack (without access panel) Code: 23135 Washbasin Pack (450mm washbasin) Code: 23110

Accessory options

Extractor fan Code: 23154 Luda® electric shower See page 152 Arka mixer shower See page 156 Shower waste pump Code: 23150

Waste & ramp options



Surface mounted / above floor (side flo)

Optional ramp / 45mm step



Above floor pumped waste

Ramp supplied as standard



gravity waste

Ramp supplied as standard



1 Close Coupled Dual Flush Toilet with Spatula Flush

- 2 White Ergonomic Toilet Seat
- 3 Stainless Steel Fold Up Support Rail
- 4 Option HFW Silverdale Screen Set
- 5 Tuff Form® Former
- 6 Stainless Steel TF75 Gravity Waste
- 7 Arka Mixer Shower
- 8 Stainless Steel Grab Rail
- 9 Concave Wash Basin With Semi Pedestal
- 10 Mixer Tap









Features at a glance

Shower screens

All our shower screens are designed specifically for the mobility and domestic markets and are both extremely practical and stylish

Benefits

- Full height screens compliment any elegant bathroom
- Half height screens give easy carer access
- A stronger magnetic strip increases water retention
- Robust frames for a longer life
- Stronger fittings provide better wear and tear
- PET panels gives shatterproof glazing and added safety
- Quality curtains provided as standard


Features

- New improved smooth modern latches and D handles
- 180° hinges enable doors to open both inwards and outwards
- Bi-fold screens feature 360 degrees hinges
- Unique locking rising butt two-way hinges
- Elastomeric gaskets provide a high integrity, watertight seal
- Stronger and better designed seals for a continuous water barrier
- Drop rods are 600mm long where supplied
- All hinges and caps made from hardwearing Nylon 6

Please note: all measurements are taken from outside the screen and are not the tray size. Screens are not guaranteed water tight. Any 760mm screen is achieved with an extra wide compensator.

Option A screen, handed

Bi-fold door to 'A/B' side opening in and out. Single door to 'C' side opening in and out. L-shaped curtain rail supplied. Handles are included with Option A screens. Drop rod is 600mm

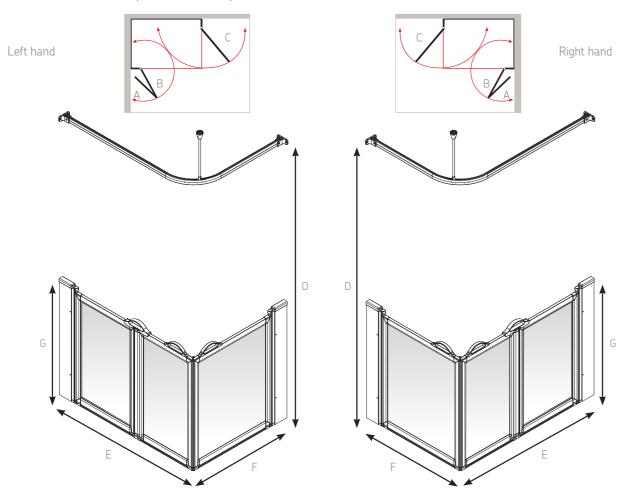

Overall tray dimension	А	В	С	D	E	F	900mm	G 750mm
1000 x 700mm	432mm	477mm	615mm	1880mm	1000mm	700mm	91002L/R	91001L/R*
1200 x 700mm	532mm	577mm	615mm	1880mm	1200mm	700mm	91004L/R	91003L/R
1200 x 760mm	532mm	577mm	615mm	1880mm	1200mm	760mm	91189L/R	91188L/R
1300 x 700mm	582mm	627mm	615mm	1880mm	1300mm	700mm	91006L/R	91005L/R*
1250 x 750mm	532mm	577mm	615mm	1880mm	1250mm	750mm	91191L/R	91190L/R
1350 x 750mm	582mm	627mm	615mm	1880mm	1350mm	750mm	91193L/R	91192L/R


Please Note: 760mm tray is achieved with extra wide compensator Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Denotes multi spec/pipe duct screens

Standard screens

Option B screen, handed

Side panel with single door to 'F' side opening in and out. Bi-fold doors to 'G' side opening in and out. L-shaped curtain rail supplied. Handles are included with Option B screens.

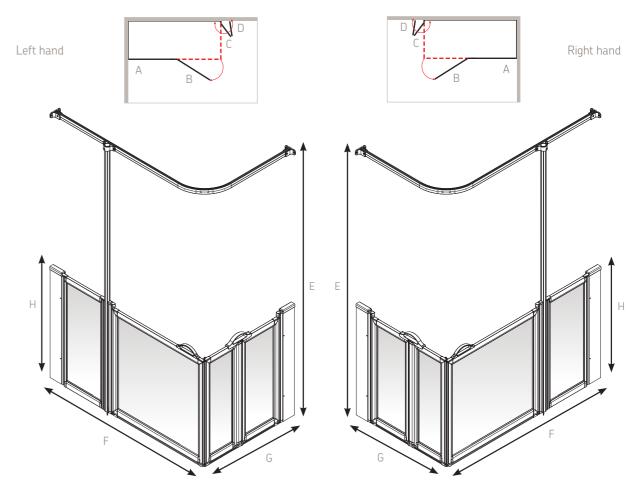


Overall tray dimension	А	В	С	D	E	F	G	900mm	H 750mm
1200 x 700mm	412mm	749mm	327mm	282mm	1880mm	1200mm	700mm	91009L/R	91007L/R*
1200 x 760mm	412mm	749mm	327mm	282mm	1880mm	1200mm	760mm	91195L/R	91194L/R
1200 x 820mm	412mm	749mm	387mm	342mm	1880mm	1200mm	820mm	91010L/R	91008L/R
1300 x 700mm	692mm	565mm	327mm	282mm	1880mm	1300mm	700mm	91169L/R	91168L/R
1420 x 700mm	692mm	685mm	327mm	282mm	1880mm	1420mm	700mm	91015L/R	91013L/R
1420 x 820mm	692mm	685mm	387mm	342mm	1880mm	1420mm	820mm	91016L/R	91014L/R
1500 x 700mm	764mm	693mm	327mm	282mm	1880mm	1500mm	700mm	91019L/R	91017L/R*
1700 x 700mm	810mm	847mm	327mm	282mm	1880mm	1700mm	700mm	91022L/R	91021L/R*
1250 x 750mm	462mm	749mm	327mm	282mm	1880mm	1250mm	750mm	91197L/R	91196L/R
1470 x 750mm	742mm	685mm	327mm	282mm	1880mm	1470mm	750mm	91199L/R	91198L/R

Please Note: 760mm tray is achieved with extra wide compensator Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Option BF screen, non handed.

Bi-parting doors to 'F' and 'G' sides, opening in and out. L-shaped curtain rail supplied. Handles are included with Option BF screens.

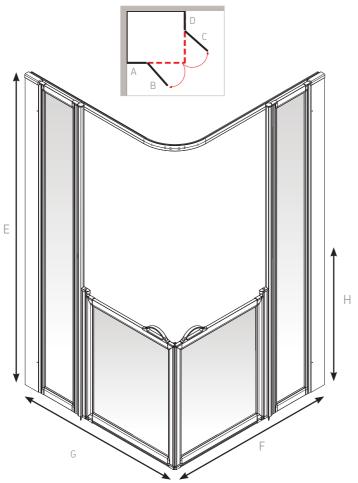

Overall tray dimension	А	В	С	D	E	F	G	900mm	1 750mm
1000 x 1000mm	500mm	457mm	457mm	500mm	1880mm	1000mm	1000mm	91024N	91023N
1050 x 1050mm	550mm	457mm	457mm	550mm	1880mm	1050mm	1050mm	91201N	91200N


Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Denotes multi spec/pipe duct screens

Standard screens

Option C screen, handed.

Bi-parting doors to 'D' side opening in and out with fixed panel to 'E' side. L-shaped curtain rail supplied. Handles are an optional extra.

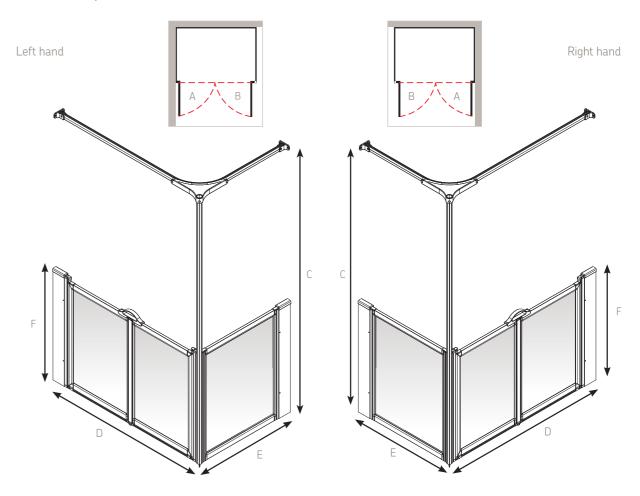


Overall tray dimension	А	В	С	D	E	900mm	F 750mm
1000 x 700mm	453mm	453mm	1880mm	1000mm	700mm	91027L/R	91025L/R*
1000 x 1000mm	453mm	453mm	1880mm	1000mm	1000mm	91028L/R	91026L/R
1200 x 650mm	553mm	553mm	1880mm	1200mm	650mm	91032L/R	91029L/R
1200 x 700mm	553mm	553mm	1880mm	1200mm	700mm	91033L/R	91030L/R
1200 x 760mm	553mm	553mm	1880mm	1200mm	760mm	91205L/R	91204L/R
1200 x 820mm	553mm	553mm	1880mm	1200mm	820mm	91034L/R	91031L/R
1300 x 700mm	603mm	603mm	1880mm	1300mm	700mm	91037L/R	91035L/R
1300 x 820mm	603mm	603mm	1880mm	1300mm	820mm	91038L/R	91036L/R*
1050 x 1050mm	453mm	435mm	1880mm	1050mm	1050mm	91203L/R	91202L/R
1250 x 750mm	553mm	553mm	1880mm	1250mm	750mm	91207L/R	91206L/R
1350 x 750mm	603mm	603mm	1880mm	1300mm	750mm	91209L/R	91208L/R

Please Note: 760mm tray is achieved with extra wide compensator

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Option D screen, handed

Folding doors and fixed panel to 'F' side and fixed panel 'G' side. L-shaped curtain rail supplied. Handles are included with Option D screens.

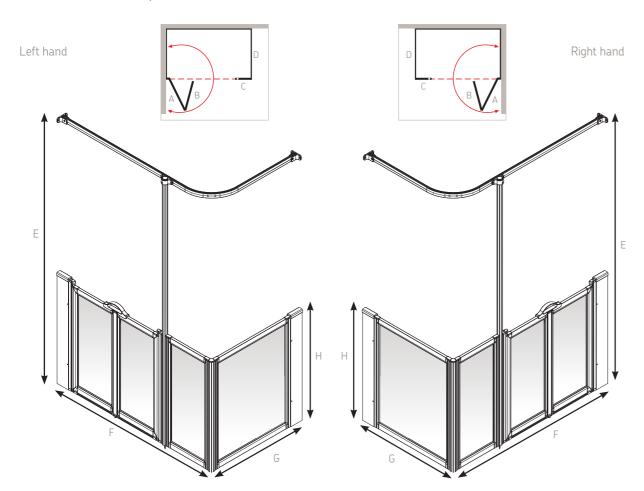

Overall tray dimension	А	В	С	D	Е	F	G	900mm	1 750mm
1200 x 700mm	374mm	339mm	398mm	700mm	1880mm	1200mm	700mm	91040L/R	91039L/R*
1200 x 760mm	374mm	339mm	398mm	760mm	1880mm	1200mm	760mm	91211L/R	91210L/R*
1250 X 750mm	374mm	339mm	398mm	750mm	1880mm	1250mm	750mm	91213L/R	91212L/R*


Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides Please Note: 760mm tray is achieved with extra wide compensator

Denotes multi spec/pipe duct screens

Standard screens

Option E screen

Bi-fold doors to 'F' and 'G' sides, opening in and out. L-shaped curtain rail supplied. Handles are included with Option E screens.

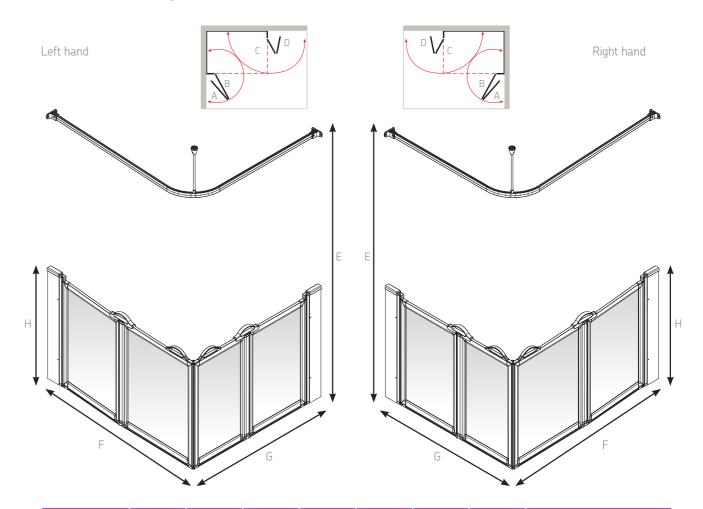


Overall tray dimension	А	В	С	D	E	F	G	900mm	H 750mm
800 x 800mm	332mm	377mm	377mm	332mm	1880mm	800mm	800mm	91042N	91041N
820 x 820mm	342mm	387mm	387mm	342mm	1880mm	820mm	820mm	91044N	91043N
900 x 900mm	382mm	427mm	427mm	382mm	1880mm	900mm	900mm	91046N	91045N
1000 x 700mm	432mm	477mm	327mm	282mm	1880mm	1000mm	700mm	91049L/R	91047L/R
1000 x 1000mm	432mm	477mm	477mm	432mm	1880mm	1000mm	1000mm	91050N	91048N
1200 x 700mm	532mm	577mm	327mm	282mm	1880mm	1200mm	700mm	91057L/R	91053L/R
1200 x 760mm	532mm	577mm	327mm	282mm	1880mm	1200mm	760mm	91217L/R	91216L/R
1200 x 820mm	532mm	577mm	387mm	342mm	1880mm	1200mm	820mm	91058L/R	91054L/R
1200 x 900mm	532mm	577mm	427mm	382mm	1880mm	1200mm	900mm	91060L/R	91056L/R
1300 x 700mm	582mm	627mm	327mm	282mm	1880mm	1300mm	700mm	91063L/R	91061L/R
1300 x 820mm	582mm	627mm	387mm	342mm	1880mm	1300mm	820mm	91064L/R	91062L/R
1050 x 1050mm	432mm	477mm	477mm	432mm	1880mm	1050mm	1050mm	91215N	91214N
1250 x 750mm	532mm	577mm	327mm	282mm	1880mm	1250mm	750mm	91219L/R	91218L/R
1350 x 750mm	382mm	627mm	327mm	282mm	1880mm	1350mm	750mm	91221L/R	91220L/R

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides Please Note: 760mm tray is achieved with extra wide compensator



Option H screen, handed

Fits most tray sizes LH and RH. Curtain rail supplied.

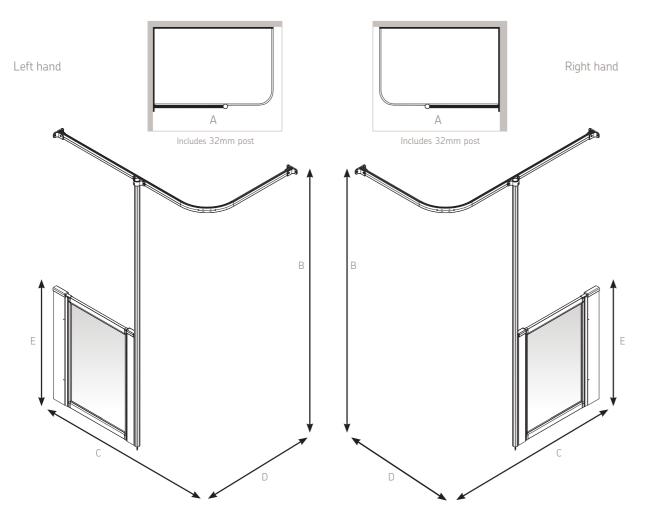

Overall tray dimension	А	В	С	D	900mm	E 750mm
	600mm	1880mm			91074L/R	91069L/R
's sizes*	650mm	1880mm	*	*	91223L/R	91222L/R
	700mm	1880mm	st trays sizes`	sizes	91075L/R	91070L/R
	750mm	1880mm			91225L/R	91224L/R
trays	800mm	1880mm		rays	91076L/R	91071L/R
5t t	850mm	1880mm		st tr	91227L/R	91226L/R
most	900mm	1880mm	most	most	91077L/R	91072L/R
	950mm	1880mm	•	•	91229L/R	91228L/R
Fits	1000mm	1880mm	Fits	Fits	91078L/R	91073L/R
	1050mm	1880mm			91230L/R	91031L/R


Denotes multi spec/pipe duct screens

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on one side Please Note: Screen width needs to be less than the length of the tray and provide adequate access for user

Standard screens

Option HF screen, non handed

Fits all tray sizes LH and RH. Curtain rail supplied.

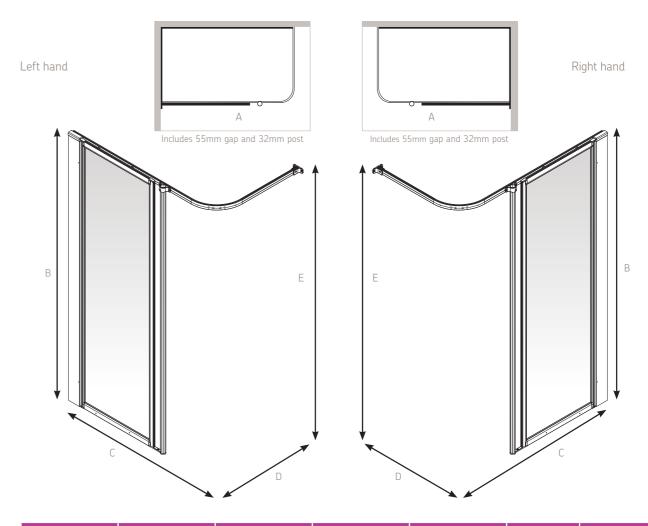


	Overall tray dimension	А	В	С	D	Е	Code	
	*5	600mm	1870mm				1870mm	91079N
		650mm	1870mm	*5	*	1870mm	91242N	
	sizes*	700mm	1870mm	/s sizes`	sizes*	1870mm	91080N	
	8	750mm	1870mm			1870mm	91243N	
	trays	800mm	1870mm	trays	trays	1870mm	91081N	
	St t	850mm	1870mm			1870mm	91244N	
	most	900mm	1870mm	most	most	1870mm	91082N	
	Fits	950mm	1870mm			1870mm	91245N	
		1000mm	1870mm	Fits	Fits	1870mm	91083N	
		1050mm	1870mm			1870mm	91246N	

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on one side Please Note: Screen width needs to be less than the length of the tray and provide adequate access for user For Multi Spec/Pipe Duct kits additional compensators are required. Please specify when ordering.

Option J screen, handed

Fixed panel with single door opening out only. Curtain rail L-shaped, can be cut to fit straight. Handles are supplied.

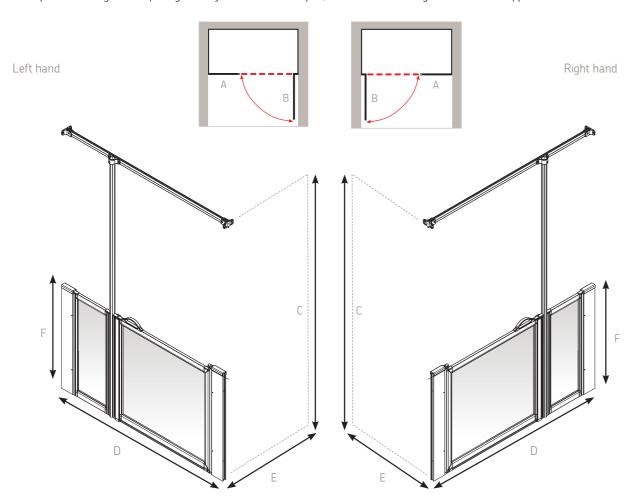

Overall tray width	А	В	С	D	E	900mm	- 750mm
1300mm	417mm	799mm	1880mm	1300mm	700mm	91085L/R	91084L/R
1420mm	537mm	799mm	1880mm	1420mm	700mm	91087L/R	91086L/R
1700mm	755mm	861mm	1880mm	1700mm	700mm	91089L/R	91088L/R
1350mm	467mm	799mm	1880mm	1350mm	750mm	91253L/R	91252L/R
1470mm	587mm	799mm	1880mm	1470mm	750mm	91255L/R	91254L/R


Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Denotes multi spec/pipe duct screens

Standard screens

Option K screen, handed

Double bi-fold doors to 'G' side opening in and out. Fixed side panel to 'H'. L-shaped curtain rail supplied.

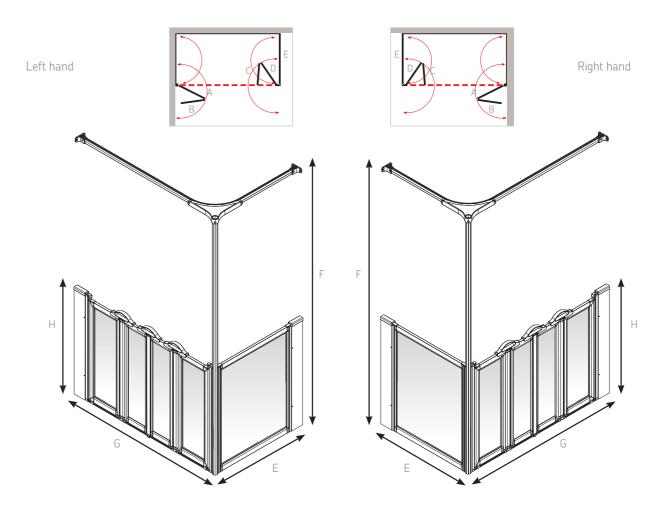


Overall tray width	А	В	С	D	Е	F	G	900mm	H 750mm
1200 x 650mm	295mm	260mm	260mm	295mm	650mm	1880mm	1200mm	91092L/R	91090L/R
1200 x 700mm	295mm	260mm	260mm	295mm	700mm	1880mm	1200mm	91093L/R	91091L/R
1200 x 760mm	295mm	260mm	260mm	295mm	760mm	1880mm	1200mm	91257L/R	91256L/R
1420 x 700mm	350mm	315mm	315mm	350mm	700mm	1880mm	1420mm	91096L/R	91094L/R*
1420 x 820mm	350mm	315mm	315mm	350mm	820mm	1880mm	1420mm	91097L/R	91095L/R
1700 x 700mm	420mm	385mm	385mm	420mm	700mm	1880mm	1700mm	91099L/R	91098L/R*
1250 x 750mm	295mm	260mm	260mm	295mm	750mm	1880mm	1250mm	91259L/R	91258L/R
1470 x 750mm	350mm	315mm	315mm	350mm	750mm	1880mm	1470mm	91261L/R	91260L/R*

Please Note: 760mm tray is achieved with extra wide compensator

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Option M screen, non handed

Bi-parting doors opening in and out. L-shaped curtain rail supplied. Can be trimmed on site. Handles are an optional extra.

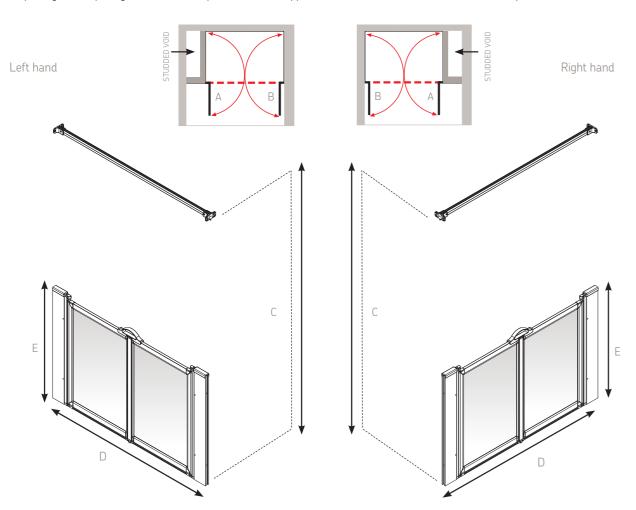

Overall tray width	А	В	С	D	900mm	E 750mm
800mm	347mm	347mm	1880mm	800mm	91109N	91104N
900mm	397mm	397mm	1880mm	900mm	91105N	91100N*
1000mm	447mm	447mm	1880mm	1000mm	91106N	91101N
1200mm	547mm	547mm	1880mm	1200mm	91107N	91102N
1300mm	597mm	597mm	1880mm	1300mm	91108N	91103N*
1050mm	447mm	447mm	1880mm	1050mm	91263N	91262N
1250mm	547mm	547mm	1880mm	1250mm	91265N	91264N
1350mm	597mm	597mm	1880mm	1350mm	91267N	91266N*


Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Denotes multi spec/pipe duct screens

Standard screens

Option N screen, non handed

Twin bi-folding doors, opening in and out. L-shaped curtain rail supplied. Can be trimmed on site.

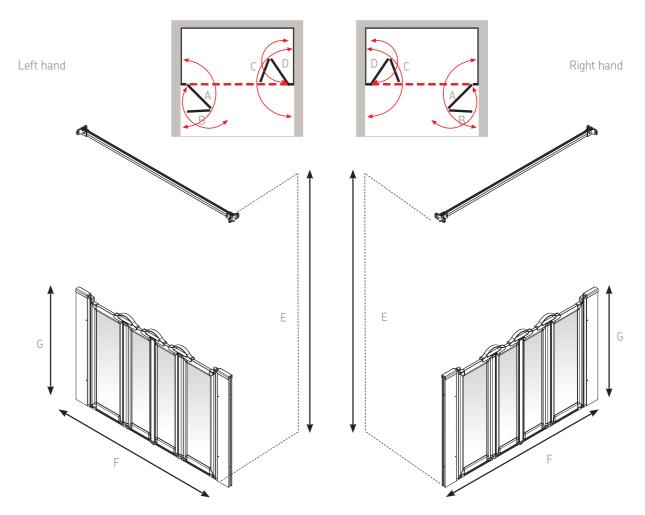


Overall tray width	А	В	С	D	E	F	900mm	3 750mm
1200mm	292mm	257mm	257mm	292mm	1880mm	1200mm	91118N	91110N
1300mm	317mm	282mm	282mm	317mm	1880mm	1300mm	91119N	91111N
1420mm	347mm	312mm	312mm	347mm	1880mm	1420mm	91121N	91113N
1500mm	367mm	332mm	332mm	367mm	1880mm	1500mm	91122N	91114N
1524mm	341mm	306mm	306mm	341mm	1880mm	1524mm	91116N**	91115N**
1700mm	417mm	382mm	382mm	417mm	1880mm	1700mm	91124N	91117N
1250mm	292mm	257mm	257mm	292mm	1880mm	1250mm	91269N	91268N
1350mm	317mm	282mm	282mm	317mm	1880mm	1350mm	91271N	91270N
1470mm	347mm	312mm	312mm	347mm	1880mm	1470mm	91273N	91272N

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

^{**} No rail or curtain supplied with 1524mm screen option

Option P screen, handed

Fixed side panel and overlapping doors to 'E' side. Fixed side panel to 'G' side. Straight curtain rail supplied. Handles are included with Option P screens.

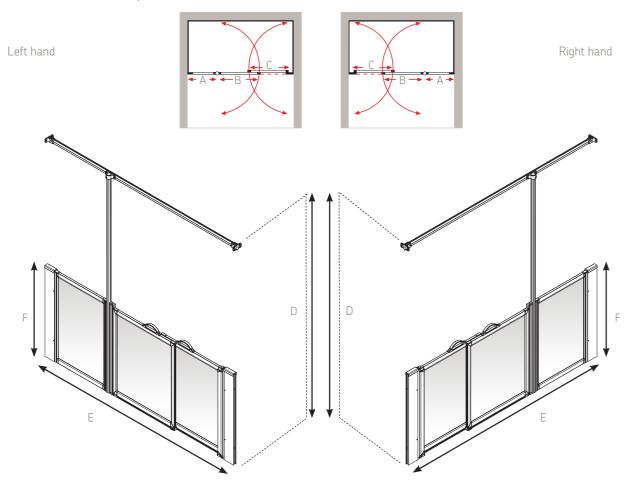

Overall tray dimension	А	В	С	D	E	900mm	F 750mm
1800mm	560mm	629mm	641mm	1880mm	1500 - 1800mm	91126L/R	91125L/R
1850 x 750mm	610mm	629mm	641mm	1880mm	1550 - 1850mm	91275L/R	91274L/R

Column E - measurements account for adjustment with overlapping doors

Denotes multi spec/pipe duct screens

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides


Overlapping doors enable the Option P screen set to be adjusted on site to accommodate different alcove widths.

This avoids the need for accurate pre-measurement and specially made screens.

Standard screens

Option TT screen, handed

Trimmable panel with bi-parting doors, opening in and out. Straight curtain rail supplied. Handles are an optional extra.

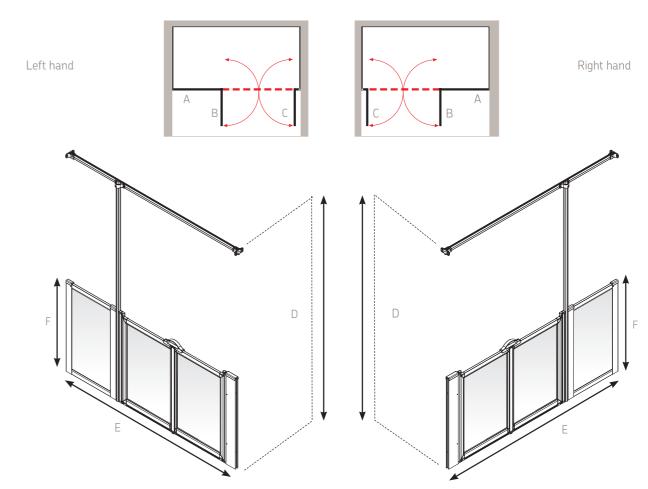

Overall tray dimension	А	В	С	D	E	900mm	F 750mm
1500 - 1800mm	385-685mm	517mm	517mm	1880mm	1500 - 1800mm	91128L/R	91127L/R

Column A - maximum size of trimmable panel

Column E - measurements account for adjustment (on door side only) with trimmable panel

Option TT screens not available for Multi Spec trays or Pipe Ducted trays


All options Patented GB 2429030

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on door side only

Option TT screen, handed, with bi-parting doors to give 900mm clear entry path, opening in and out. Fixed panel is trimmable on-site to suit alcove situations.

Option U screen, handed

Fixed panel with bi-parting doors, opening in and out. L-shaped curtain rail supplied. Can be trimmed on site.

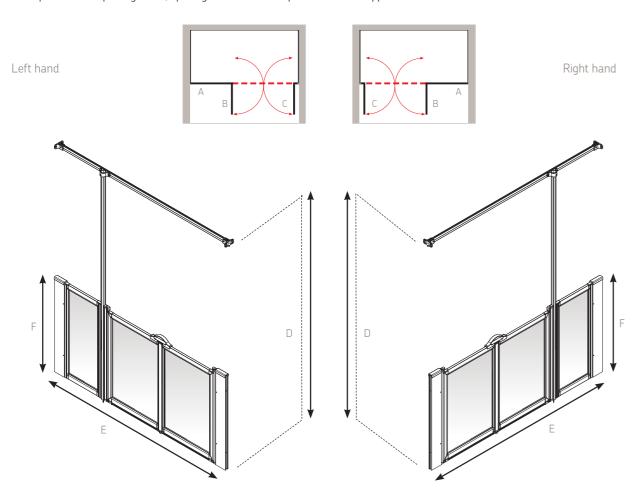

Overall tray dimension	А	В	С	D	E	900mm	750mm
1300mm	422mm	411mm	411mm	1880mm	1300mm	91131L/R	91129L/R
1420mm	485mm	439mm	439mm	1880mm	1420mm	91132L/R	91130L/R
1350mm	472mm	411mm	411mm	1880mm	1350mm	91277L/R	91276L/R
1470mm	535mm	439mm	439mm	1880mm	1470mm	91279L/R	91278L/R


Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Denotes multi spec/pipe duct screens

Standard screens

Option X screen, handed

Fixed side panel on 'G' and bi-folding doors on 'G' and 'H', opening in and out. L-shaped curtain rail supplied. Handles are supplied.

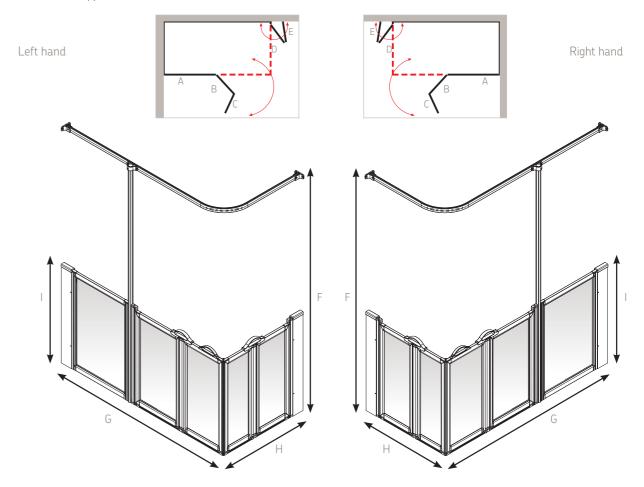


Overall tray dimension	А	В	С	D	Е	F	G	1	900mm	H 750mm
1420 x 700mm	692mm	366mm	321mm	327mm	282mm	1880mm	1420mm	700mm	91139L/R	91137L/R
1420 x 820mm	692mm	366mm	321mm	387mm	342mm	1880mm	1420mm	820mm	91140L/R	91138L/R*
1500 x 700mm	692mm	406mm	361mm	327mm	282mm	1880mm	1500mm	700mm	91143L/R	91141L/R*
1470 x 750mm	742mm	366mm	321mm	327mm	282mm	1880mm	1470mm	750mm	91281L/R	91280L/R

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Option Y screen, handed

Fixed side panel to side 'D' and bi-parting doors to 'F' side. Fixed side panel to 'G' side. L-shaped curtain rail supplied. Handles are an optional extra.

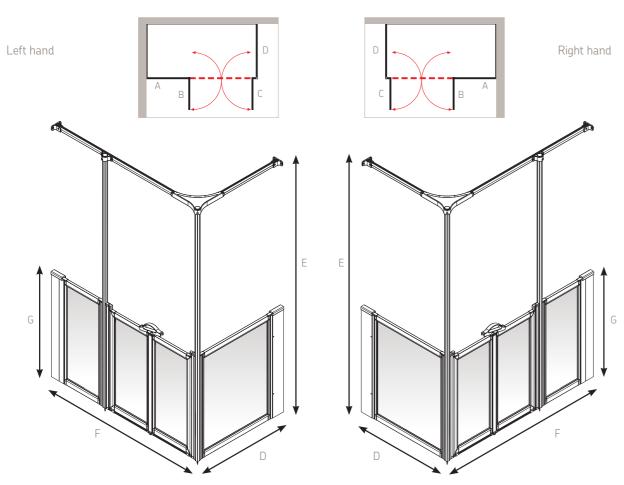

Overall tray dimension	А	В	С	D	Е	F	900mm	G 750mm
1300 x 700mm	381mm	437mm	437mm	700mm	1880mm	1300mm	91147L/R	91145L/R
1300 x 820mm	381mm	437mm	437mm	820mm	1880mm	1300mm	91148L/R	91146L/R
1420 x 700mm	500mm	437mm	437mm	700mm	1880mm	1420mm	91151L/R	91149L/R
1420 x 820mm	500mm	437mm	437mm	820mm	1880mm	1420mm	91152L/R	91150L/R
1700 x 700mm	702mm	477mm	477mm	700mm	1880mm	1700mm	91154L/R	91153L/R*
1470 x 750mm	550mm	437mm	437mm	750mm	1880mm	1470mm	91285L/R	91284L/R
1350 x 750mm	431mm	437mm	437mm	750mm	1880mm	1350mm	91283L/R	91282L/R


Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Denotes multi spec/pipe duct screens

Standard screens

Option Z screen, handed

Bi-folding doors to give 900mm clear entry path, opening in and out. Fixed panel is trimmable on site to suit alcove situations. Straight curtain rail supplied. Handles are included with option Z screens.

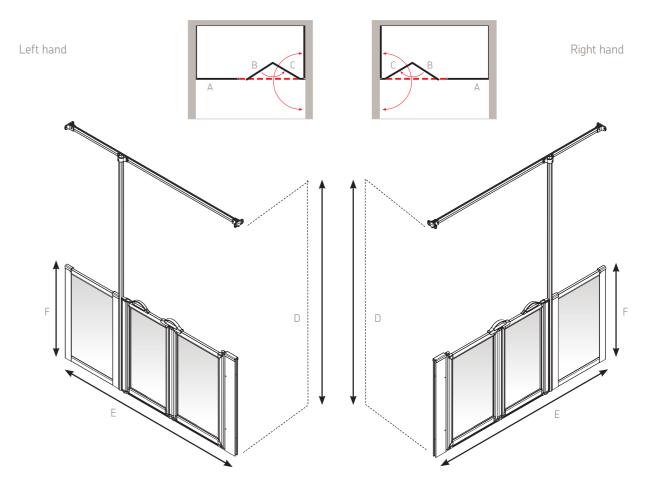

Overall tray dimension	А	В	С	D	E	900mm	750mm
1500mm	410mm	483mm	518mm	1880mm	1500mm	91156L/R	91155L/R
1700mm	710mm	483mm	518mm	1880mm	1880mm	91148L/R	91146L/R
1800mm	810mm	483mm	518mm	1880mm	1880mm	91287L/R	91286L/R

Column A - maximum size of trimmable panel


Column E - measurements account for adjustment (on door side only) with trimmable panel

Option Z screens not available for multi spec trays or pipe ducted trays

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on door side only.

Option BW screen, handed

Fixed panel with single door to 'F' side opening in and out. Bi-fold door to 'G' side opening in and out. L-shaped curtain rail supplied. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are included with Option BW screens.

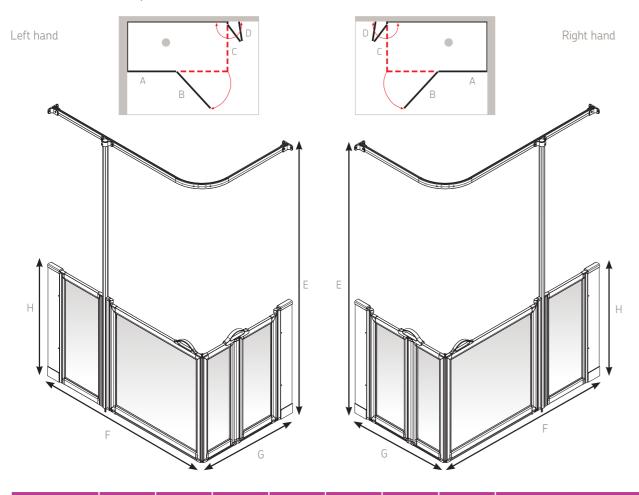


Overall tray dimension	А	В	С	D	Е	F	G	900mm	1 750mm
1400 x 900mm	696mm	665mm	427mm	382mm	1880mm	1400mm	900mm	91012L/R	91011L/R
1500 x 820mm	764mm	693mm	387mm	342mm	1880mm	1500mm	820mm	91020L/R	91018L/R

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Wet floor

Option EW screen

Bi-fold doors to both 'F' and 'G' sides, opening in and out. L-shaped curtain rail supplied. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are included with Option EW screens

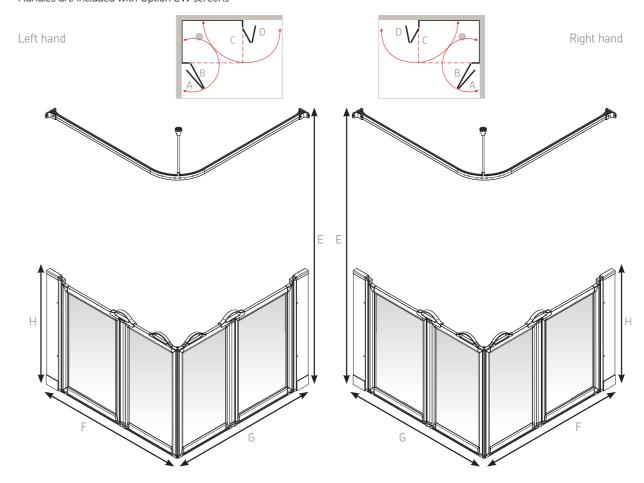


Overall tray dimension	А	В	С	D	Е	F	G	900mm	H 750mm
900 x 900mm	382mm	427mm	427mm	382mm	1880mm	900mm	900mm	91170N	91171N
1000 x 1000mm	432mm	477mm	477mm	432mm	1880mm	1000mm	1000mm	91172N	91173N
1135 x 770mm	500mm	545mm	362mm	317mm	1880mm	1135mm	770mm	91052L/R	91051L/R
1200 x 1200mm	532mm	577mm	577mm	532mm	1880mm	1200mm	1200mm	91059N	91055N
1300 x 820mm	582mm	627mm	387mm	342mm	1880mm	1300mm	820mm	91174L/R	91175L/R
1400 x 900mm	632mm	677mm	427mm	382mm	1880mm	1400mm	900mm	91066L/R	91065L/R
1500 x 820mm	682mm	727mm	387mm	342mm	1880mm	1500mm	820mm	91068L/R	91067L/R

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides. Drop rod is 600mm

Option HW screen, handed

Fits LH and RH. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Trimmable curtain rail.

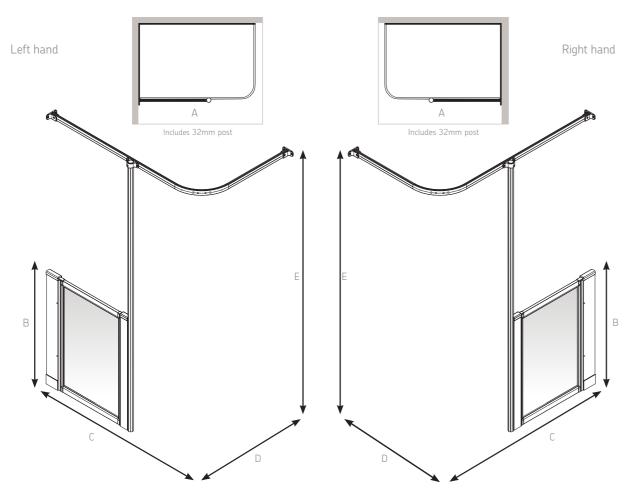


	erall tray nension	А	В	С	D	E	900mm	ode 750mm
	*	* 600mm 900 or 750mm *	*	1880mm	91233L/R	91232L/R		
	Fits mo	700mm	900 or 750mm	izes	izes	1880mm	91235N	91234N
		800mm	900 or 750mm	∑ S	its m ays si	1880mm	91237N	91236N
i		900mm	900 or 750mm	-its ays		1880mm	91239N	91238N
		1000mm	900 or 750mm	t t	t –	1880mm	91241N	91240N

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on one side

Wet floor

Option HFW screen, non handed

L-shaped curtain rail supplied. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring.

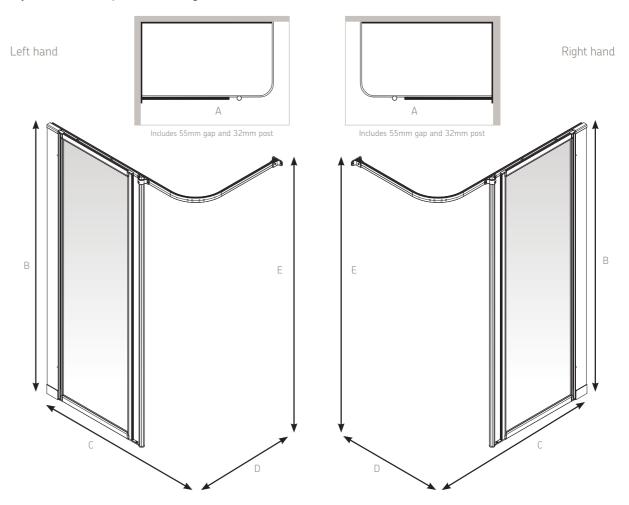


Overall tray dimension	А	В	С	D	Е	Code
+ *,	600mm	1870mm	*	*	1870mm	91247N
izes	700mm	1870mm	izes	nost izes	1870mm	91248N
∑ S	800mm	1870mm	∑ S	∑	1870mm	91249N
Fits ays	900mm	1870mm	Fits ays	Fits ays	1870mm	91250N
_ 	1000mm	1870mm	Ţ	_ 	1870mm	91251N

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on one side

Option MW screen, non handed

Bi-parting doors opening in and out. Supplied with a 1250mm straight rail. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are an optional extra.

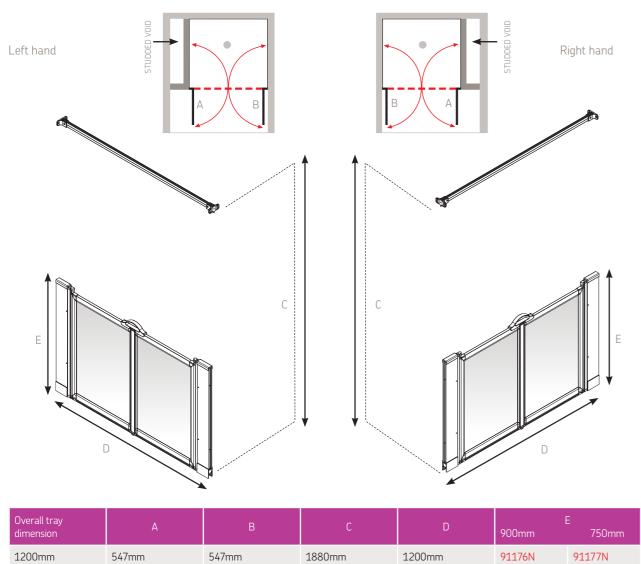


Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Wet floor

Option NW screen, non handed

Bi-folding doors opening in and out. Curtain rail supplied. Can be trimmed on site. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring.

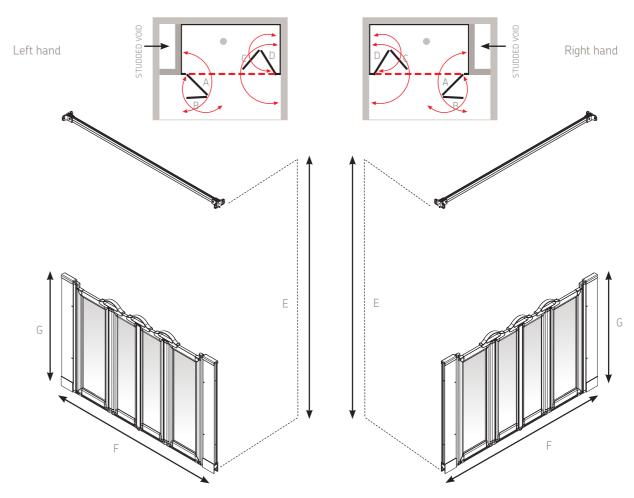


Overall tray dimension	А	В	С	D	E	F	900mm	3 750mm
1300mm	317mm	282mm	282mm	317mm	1880mm	1300mm	91178N	91179N
1400mm	347mm	312mm	312mm	347mm	1880mm	1400mm	91120N	91112N
1500mm	367mm	332mm	332mm	367mm	1880mm	1500mm	91180N	91181N
1600mm	392mm	357mm	357mm	392mm	1880mm	1600mm	91123N	N/A

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Option PW screen, handed

Fixed panel with bi-parting, overlapping doors, opening in and out. Straight curtain rail can be cut to fit. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are included with Option PW.

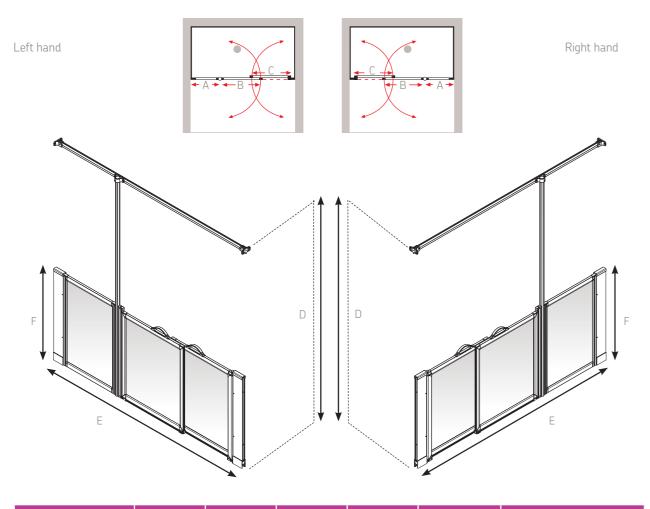

Overall tray dimension	А	В	С	D	E	900mm	= 750mm
1800mm	560mm	629mm	641mm	1880mm	1500 - 1800mm	91182L/R	91183L/R

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Column E - measurements account for adjustment with overlapping doors


Overlapping doors enable the Option P screen set to be adjusted on site to accommodate different alcove widths.

This avoids the need for accurate pre-measurement and specially made screens.

Wet floor

Option TTW screen, handed

Trimmable panel with bi-parting doors, opening in and out. Straight curtain rail. Handles are an optional extra.

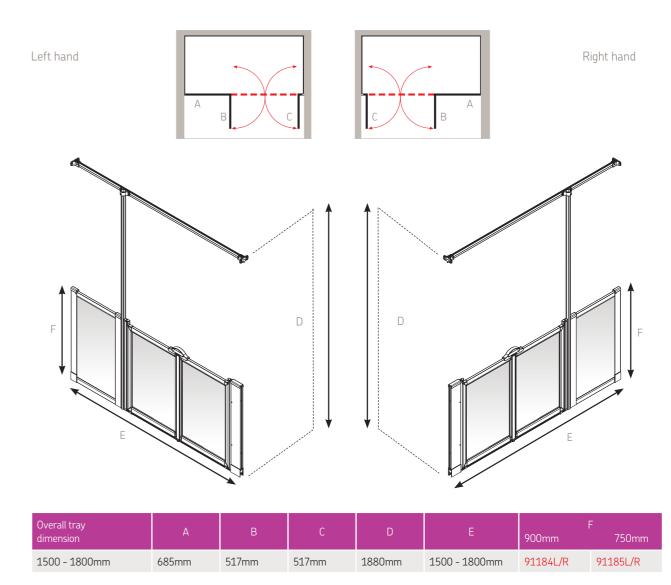


Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on door side only.

Column A - maximum size of trimmable panel

Column E - measurements account for adjustment (on door side only) with trimmable panel

Option XW screen, handed

Fixed panel with bi-fold doors to 'F' side opening in and out. Bi-fold door to 'G' side opening in and out. L-shaped curtain rail. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are included on Option XW screens.

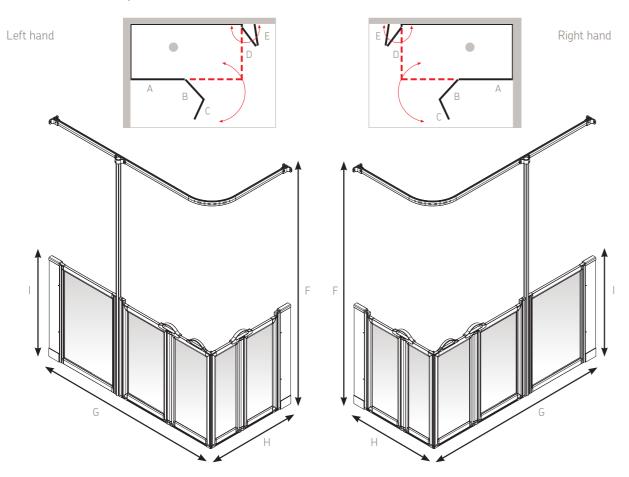


Overall tray dimension	А	В	С	D	E	F	G	Н	900mm	1 750mm
1300 x 820mm	522mm	391mm	346mm	387mm	342mm	1880mm	1300mm	820mm	91136L/R	91134L/R
1500 x 820mm	692mm	406mm	361mm	387mm	342mm	1880mm	1500mm	820mm	91144L/R	91142L/R

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Wet floor

Option ZW screen, handed

Bi-folding doors to give a 900mm clear entry path, opening in and out. Fixed panel is trimmable on-site to suit alcove situations. Straight curtain rail can be cut to fit. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are included on Option ZW screens.

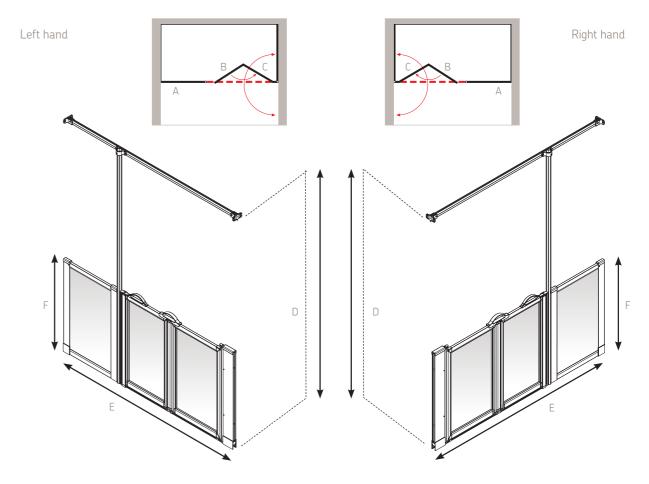

Overall tray dimension	А	В	С	D	E	900mm	- 750mm
1800mm	810mm	483mm	518mm	1880mm	1500 - 1800mm	91186L/R	91187L/R

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on door side only.


Column A - maximum size of trimmable panel


Column E - measurements account for adjustment (on door side only) with trimmable panel

Glass screens

Option GA screen, non handed


Single wall mounted glass screen supported by wall brace.






Right hand

level best

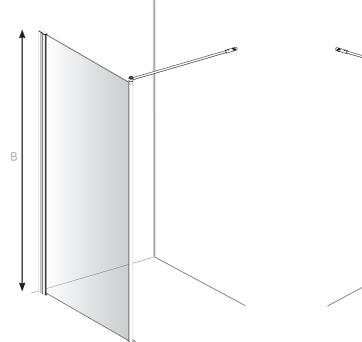




Screen sizes	А	В	Code
700 x 1950mm	700mm	1950mm	LB00105
800 x 1950mm	800mm	1950mm	LB00106
900 x 1950mm	900mm	1950mm	LB00107
1000 x 1950mm	1000mm	1950mm	LB00108


Glass screens

Left hand

Option GB screen, non handed



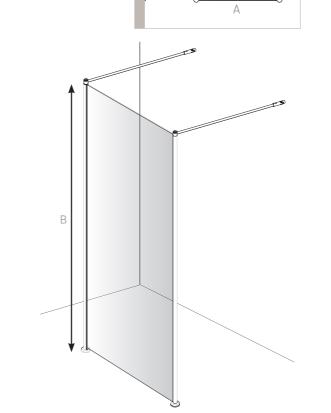


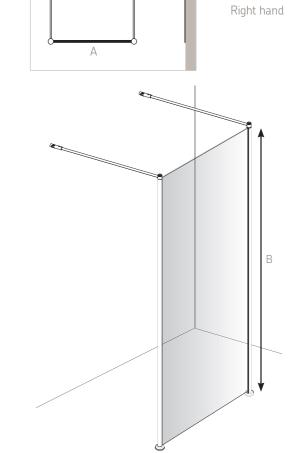

Screen sizes	А	В	Code
900 x 1950mm	900mm	1950mm	LB00111
1000 x 1950mm	1000mm	1950mm	LB00112

Option SE screen, handed

Mostly handed screens suitable for all trays and wet floors. L-Shape curtain rail can be cut to fit. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are supplied.

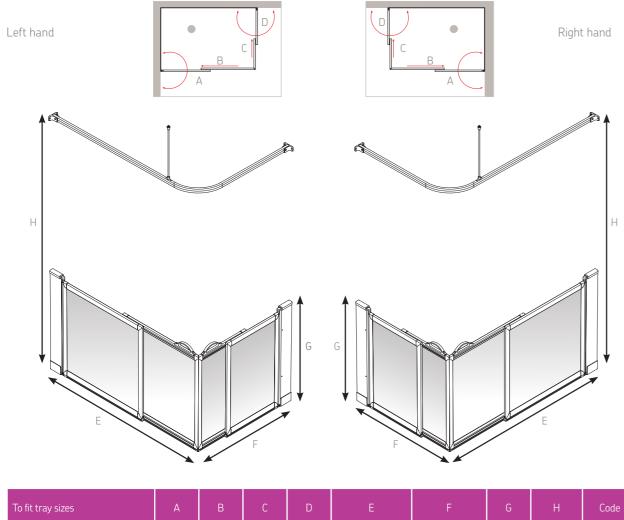


900 - 1000mm 558mm 510mm 510mm 558mm 900 - 1000mm 750mm 1880mm 15500 1200 - 1300mm x 700 - 820mm 708mm 660mm 420mm 468mm 1200 - 1300mm 700 - 820mm 750mm 1880mm 15501L/R 1420 - 1500mm x 700 - 820mm 808mm 760mm 420mm 468mm 1420 - 1500mm 700 - 820mm 750mm 1880mm 15502L/R

Please Note: Sliding screen compensators give 14.5mm adjustment inwards and outwards on both sides.

Sliding shower screens

Option SJ screen, handed


Handed screens suitable for all trays and wet floors. L-Shape curtain rail can be cut to fit. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring.

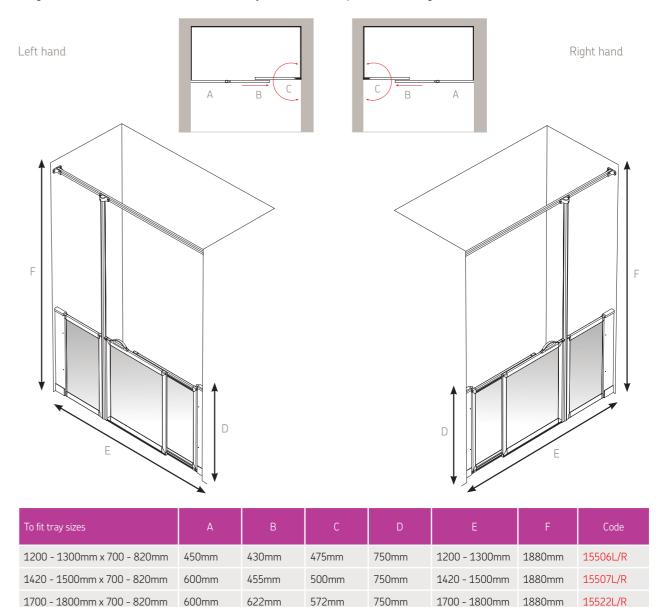

Please Note: Sliding screen compensators give 14.5mm adjustment inwards and outwards. Can not be used with a pipe duct kit. Can not be used with an extra wide compensator.

Option SM screen, handed

Handed screens suitable for all trays and wet floors. Curtain rail supplied. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to cover slip resistant flooring. Handles are supplied.

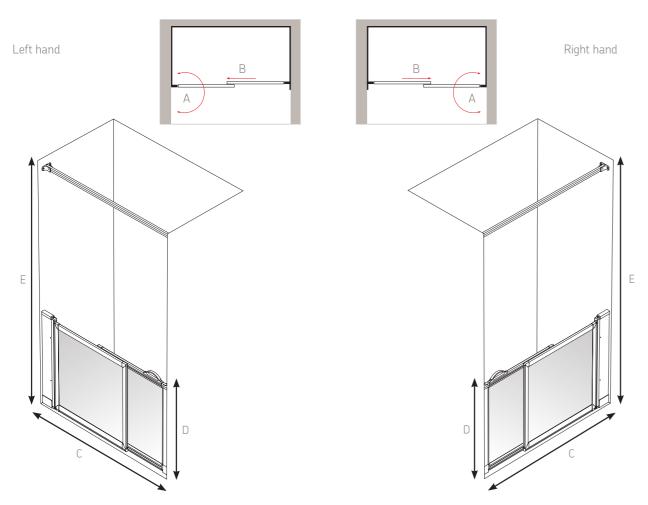


To fit tray sizes	А	В	С	D	E	Code
900 - 1000mm	538mm	493mm	900 - 1000mm	750mm	1880mm	15503L/R
1200 - 1300mm x 700 - 820mm	688mm	643mm	1200 - 1300mm	750mm	1880mm	15504L/R
1420 - 1500mm x 700 - 820mm	788mm	743mm	1420 - 1500mm	750mm	1880mm	15505L/R

Please Note: Sliding screen compensators give 14.5mm adjustment inwards and outwards on one side only.

Sliding shower screens

Option SN screen, non handed

Non-handed screens suitable for all trays and wet floors. Straight curtain rail can be cut to fit. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are supplied.

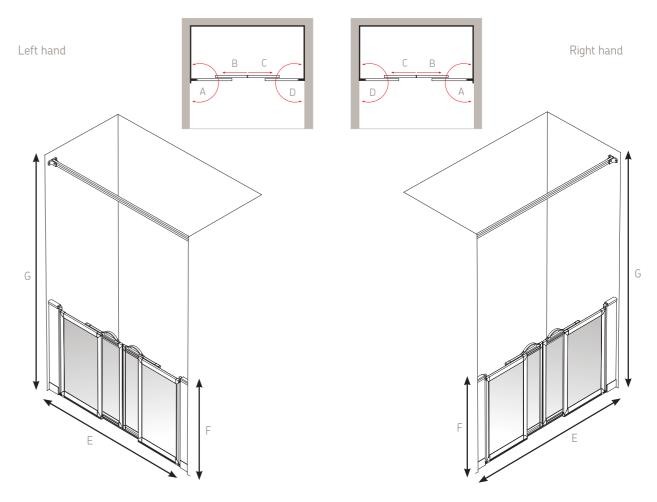


Overall tray dimension	А	В	С	D	E	F	G	Code
1200 - 1300mm	402mm	325mm	325mm	402mm	1200 - 1300mm	750mm	1880mm	15508
1420 - 1500mm	452mm	402mm	402mm	452mm	1420 - 1500mm	750mm	1880mm	15509
1700 - 1800mm	527mm	477mm	477mm	527mm	1700 - 1800mm	750mm	1880mm	15510

Please Note: Sliding screen compensators give 14.5mm adjustment inwards and outwards. Can not be used with a pipe duct kit. Can not be used with an extra wide compensator.

Option SU screen, handed

Handed screens suitable for all trays and wet floors. Curtain rail supplied. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are supplied.

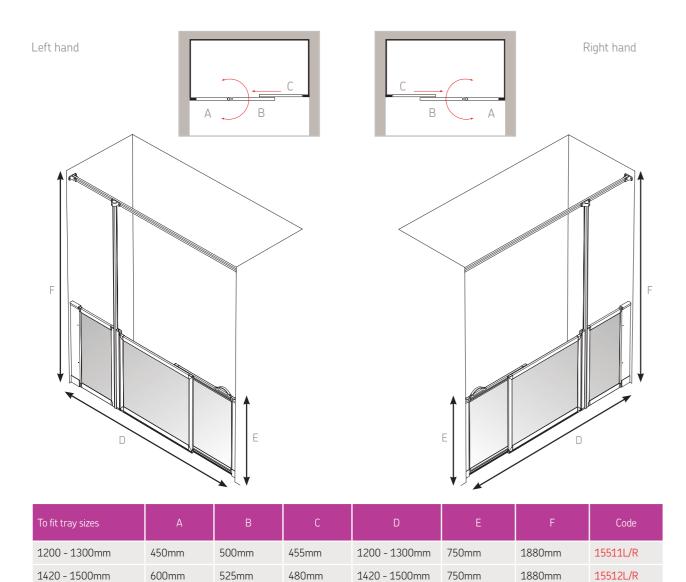

15513L/R

1880mm

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on door hinge side only. Can not be used with a pipe duct kit. Can not be used with an extra wide compensator.

575mm

528mm


1700 - 1800mm 750mm

800mm

Sliding shower screens

Option SX screen, handed

Handed screens suitable for all trays and wet floors. L-shape curtain rail can be cut to fit. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are supplied.

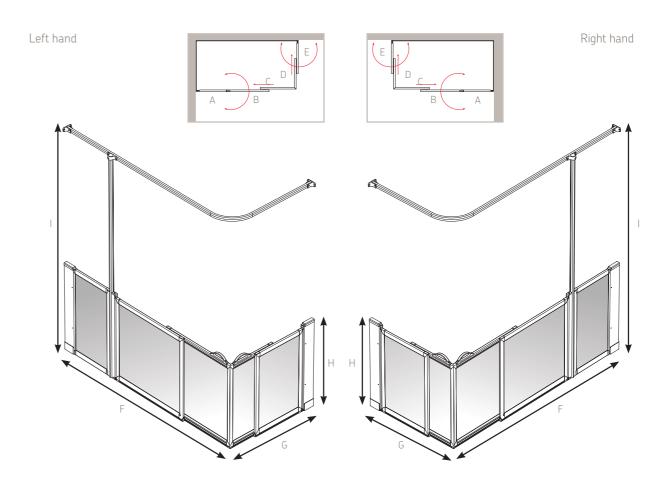


Overall tray dimension	А	В	С	D	Е	F	G	Н	I	Code
1200 - 1300mm x 700 - 820mm	450mm	513mm	465mm	420mm	468mm	1200 - 1300mm	700 - 820mm	750mm	1880mm	15514L/R
1420 - 1500mm x 700 - 820mm	600mm	538mm	490mm	420mm	468mm	1420 - 1500mm	700 - 820mm	750mm	1880mm	15515L/R
1700 - 1800mm x 700 - 820mm	800mm	581mm	543mm	420mm	468mm	1700 - 1800mm	700 - 820mm	750mm	1880mm	15516L/R

Please Note: Sliding screen compensators give 14.5mm adjustment inwards and outwards.

1700 - 1800mm

Option SY screen, handed

Handed screens suitable for all trays and wet floors. L-Shape curtain rail can be cut to fit. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are supplied.

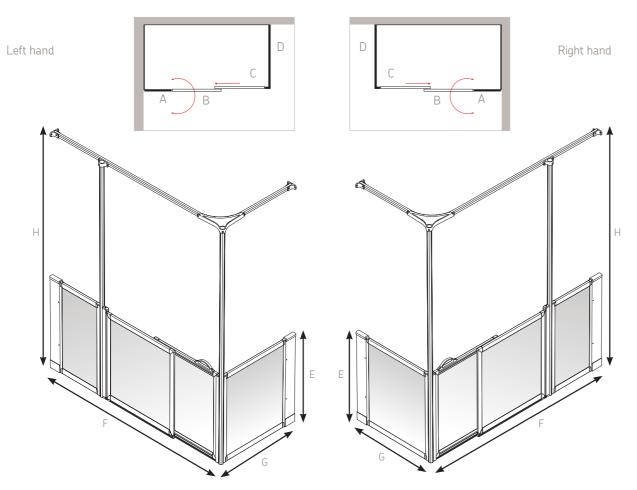


To fit tray sizes	А	В	С	D	Е	F	G	Н	Code
1200 - 1300mm x 700mm	450mm	500mm	455mm	700mm	750mm	1200 - 1300mm	700mm	1880mm	15517L/R
1200 - 1300mm x 820mm	450mm	500mm	455mm	820mm	750mm	1200 - 1300mm	820mm	1880mm	15518L/R
1420 - 1500mm x 700mm	600mm	525mm	481mm	700mm	750mm	1420 - 1500mm	700mm	1880mm	15519L/R
1420 - 1500mm x 820mm	600mm	525mm	481mm	820mm	750mm	1420 - 1500mm	820mm	1880mm	15520L/R

Please Note: Sliding screen compensators give 14.5mm adjustment inwards and outwards

Silverdale standard screens

Option A screen, handed

Bi-fold door to 'A/B' side opening in and out. Single door to 'C' side opening in and out. L-shaped curtain rail supplied. Handles are included with Option A screens. Drop rod is 600mm. Available in clear or frosted glazing.

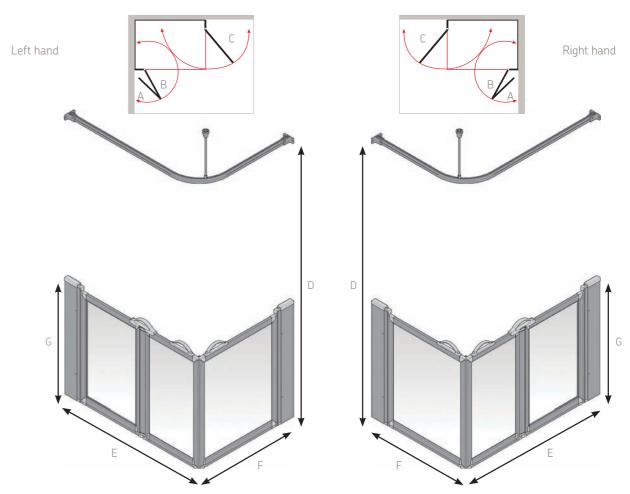


Overall tray dimension	А	В	С	D	E	F	900mm	G 750mm
1000 x 700mm	432mm	477mm	615mm	1880mm	1000mm	700mm	91002L/R	91001L/R
1200 x 700mm	532mm	577mm	615mm	1880mm	1200mm	700mm	91004L/R	91003L/R
1300 x 700mm	582mm	627mm	615mm	1880mm	1300mm	700mm	91006L/R	91005L/R*

Please Note: 760mm tray is achieved with extra wide compensator Compensators are set at mid point giving 14.5mm in and out adjustment on both sides Silverdale screens are not suitable with pipe duck kits and Multi Spec trays

Silverdale standard screens

Option E screen, handed

Bi-fold doors to 'F' and 'G' sides, opening in and out. L-shaped curtain rail supplied. Handles are included with Option E screens. Available in clear or frosted glazing.

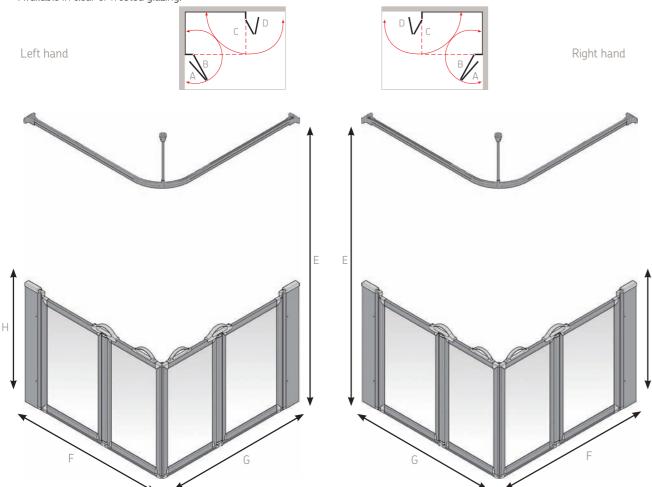


Overall tray dimension	А	В	С	D	Е	F	G	900mm	H 750mm
800 x 800mm	332mm	377mm	377mm	332mm	1880mm	800mm	800mm	91042N	91041N
820 x 820mm	342mm	387mm	387mm	342mm	1880mm	820mm	820mm	91044N	91043N
900 x 900mm	382mm	427mm	427mm	382mm	1880mm	900mm	900mm	91046N	91045N
1000 x 700mm	432mm	477mm	327mm	282mm	1880mm	1000mm	700mm	91049L/R	91047L/R
1000 x 1000mm	432mm	477mm	477mm	432mm	1880mm	1000mm	1000mm	91050N	91048N
1200 x 700mm	532mm	577mm	327mm	282mm	1880mm	1200mm	700mm	91057L/R	91053L/R
1200 x 760mm	532mm	577mm	327mm	282mm	1880mm	1200mm	760mm	91217L/R	91216L/R
1200 x 820mm	532mm	577mm	387mm	342mm	1880mm	1200mm	820mm	91054L/R	91054L/R
1200 x 900mm	532mm	577mm	427mm	382mm	1880mm	1200mm	900mm	91060L/R	91056L/R
1300 x 700mm	582mm	627mm	327mm	282mm	1880mm	1300mm	700mm	91063L/R	91061L/R
1300 x 820mm	582mm	627mm	387mm	342mm	1880mm	1300mm	820mm	91064L/R	91062L/R
1350 x 750mm	382mm	627mm	327mm	282mm	1880mm	1350mm	750mm	91221L/R	91220L/R

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides Silverdale screens are not suitable with pipe duct kits and Multi Spec trays

Silverdale standard screens

Option HF screen, non handed

Fits all tray sizes LH and RH. Curtain rail supplied. Available in clear or frosted glazing.

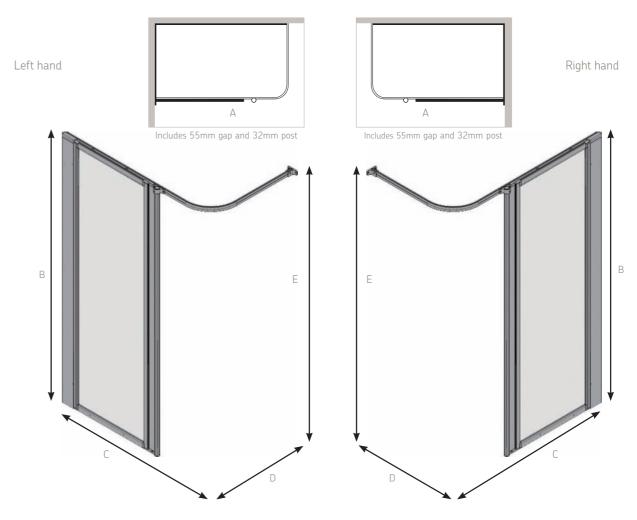


Overall tray dimension	А	В	С	D	E	Code
Fits most trays sizes*	600mm	1870mm	*	*	1870mm	91298N
	700mm	1870mm	ost	ost zes	1870mm	91299N
	800mm	1870mm	Fits m ays si;	S M S Si	1870mm	91300N
	900mm	1870mm		Fits	1870mm	91301N
	1000mm	1870mm	tr –	t t	1870mm	91302N

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides Please Note: Screen width needs to be less than the length of the tray and provide adequate access for user Silverdale screens are not suitable with pipe duct kits and Multi Spec trays

Silverdale standard screens

Option M screen, non handed

Bi-parting doors opening in and out. Curtain rail supplied. Available in clear or frosted glazing.

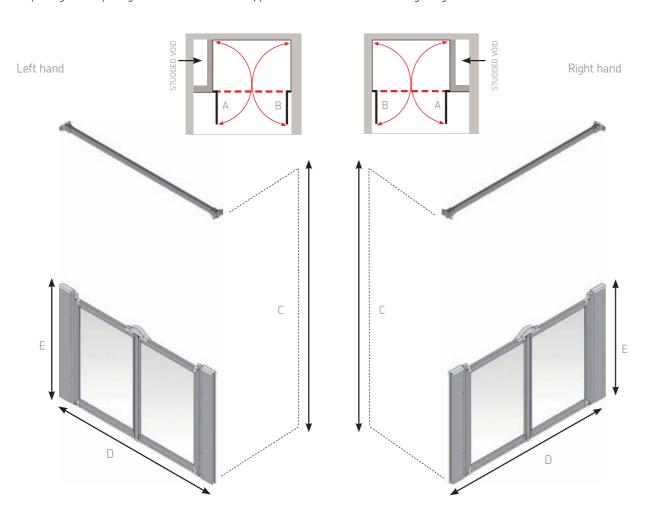


Overall tray width	А	В	С	D	900mm	750mm
800mm	347mm	347mm	1880mm	800mm	91109N	91104N
900mm	397mm	397mm	1880mm	900mm	91105N	91100N*
1000mm	447mm	447mm	1880mm	1000mm	91106N	91101N
1200mm	547mm	547mm	1880mm	1200mm	91107N	91102N
1300mm	597mm	597mm	1880mm	1300mm	91108N	91103N*

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides Silverdale screens are not suitable with pipe duct kits and Multi Spec trays

Silverdale standard screens

Option N screen, non handed

Twin bi-folding doors, opening in and out. Curtain rail supplied. Available in clear or frosted glazing.

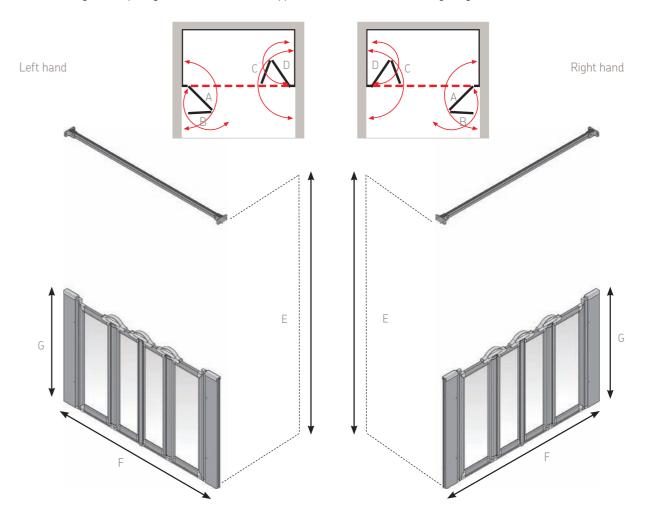

Overall traversidate	A B C D E		F	F G				
Overall tray width	А	Б	Ĺ	U	Е	Г	900mm	750mm
1200mm	292mm	257mm	257mm	292mm	1880mm	1200mm	91118N	91110N
1300mm	317mm	282mm	282mm	317mm	1880mm	1300mm	91119N	91111N
1300mm	317mm	282mm	282mm	317mm	1880mm	1300mm	91119N	91111N
1420mm	347mm	312mm	312mm	347mm	1880mm	1420mm	91121N	91113N
1420mm	347mm	312mm	312mm	347mm	1880mm	1420mm	91121N	91113N
1500mm	367mm	332mm	332mm	367mm	1880mm	1500mm	91122N	91114N
1700mm	417mm	382mm	382mm	417mm	1880mm	1700mm	91124N	91117N

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Extra wide compensators are required when purchasing Multi Spec screens separately


Silverdale screens are not suitable with pipe duct kits and Multi Spec trays $\,$

^{**} No rail or curtain supplied with 1524mm screen option

Silverdale wet floor screens

Option EW screen

Bi-fold doors to both 'F' and 'G' sides, opening in and out. L-shaped curtain rail supplied. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are included with Option EW screens. Drop rod is 600mm. Available in clear or frosted glazing.

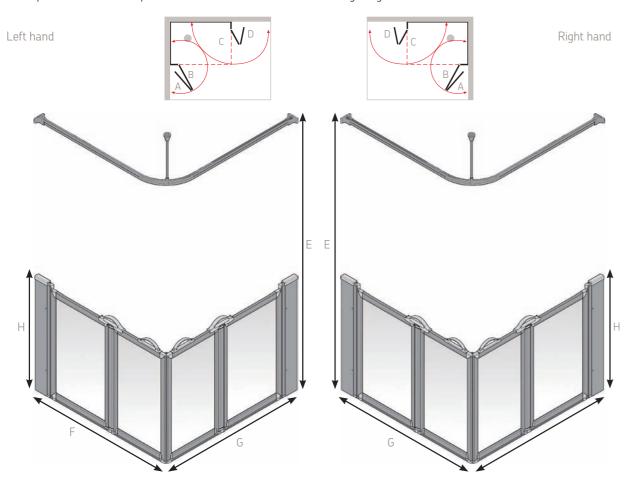


Overall tray dimension	А	В	С	D	Е	F	G	900mm	-1 750mm
900 x 900mm	382mm	427mm	427mm	382mm	1880mm	900mm	900mm	91170N	91171N
1000 x 1000mm	432mm	477mm	477mm	432mm	1880mm	1000mm	1000mm	91172N	91173N
1135 x 770mm*	500mm	545mm	362mm	317mm	1880mm	1135mm	770mm	91052L/R	91051L/R
1200 x 1200mm	532mm	577mm	577mm	532mm	1880mm	1200mm	1200mm	91059N	91055N
1300 x 820mm*	582mm	627mm	387mm	342mm	1880mm	1300mm	820mm	91174L/R	91175L/R
1400 x 900mm*	632mm	677mm	427mm	382mm	1880mm	1400mm	900mm	91066L/R	91065L/R
1500 x 820mm*	682mm	727mm	387mm	342mm	1880mm	1500mm	820mm	91068L/R	91067L/R

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides Silverdale screens are not suitable with pipe duct kits and Multi Spec trays

Silverdale wet floor screens

Option HFW screen, non handed

L Shaped curtain rail supplied. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to cover slip resistant flooring. Available in clear or frosted glazing.

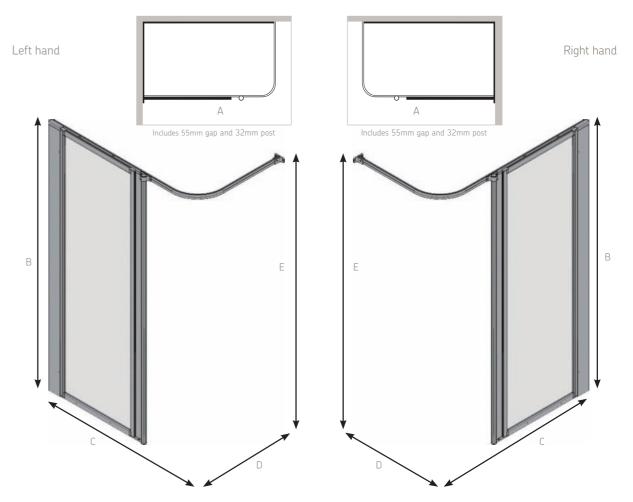


Overa dimer	all tray nsion	А	В	С	D	E	Code
	most s sizes*	600mm	1870mm	*	*	1870mm	91313N
0		700mm	1870mm	iost	iost	1870mm	91314N
-		800mm	1870mm	s m s si	s mo	1870mm	91315N
Fits	900mm	1870mm	Fits	Fits	1870mm	91316N	
	_ t	1000mm	1870mm	tr _	_ †	1870mm	91317N

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on one side Silverdale screens are not suitable with pipe duct kits and Multi Spec trays

Silverdale wet floor screens

Option MW screen, non handed

Bi-parting doors opening in and out. Supplied with curtain rail. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are an optional extra. Available in clear or frosted glazing.

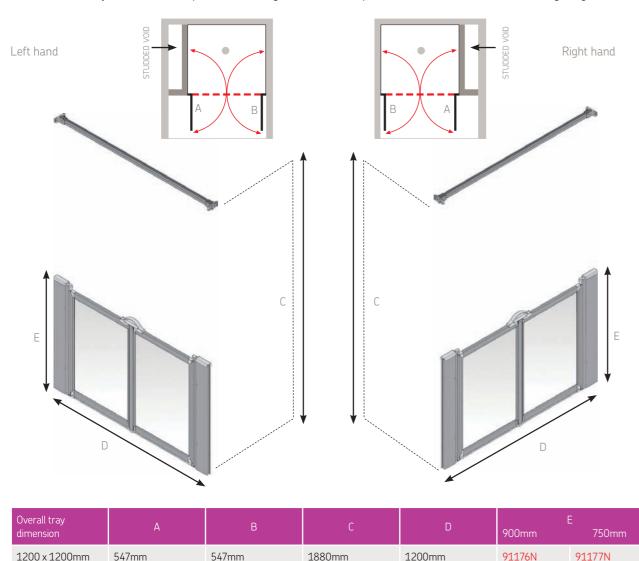


Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides Silverdale screens are not suitable with pipe duct kits and Multi Spec trays

Silverdale wet floor screens

Option NW screen, non handed

Bi-folding doors opening in and out. Curtain rail supplied, can be cut to fit straight. Supplied with special corner blocks designed to be trimmed on site to accommodate any radius to coved slip resistant flooring. Handles are an optional extra. Available in clear or frosted glazing.

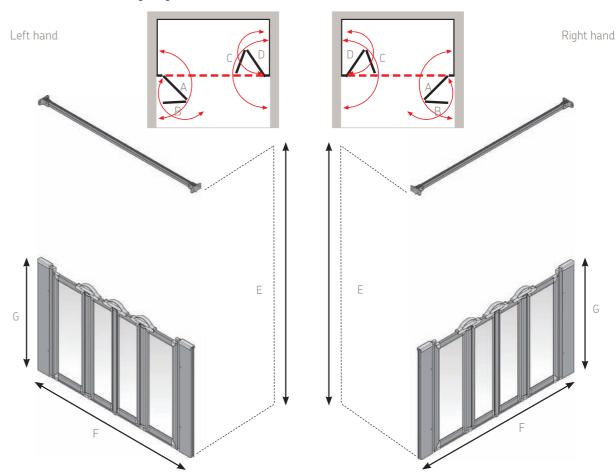

Overall tray dimension	А	В	С	D	Е	F	900mm	G 750mm
1300mm	317mm	282mm	282mm	317mm	1880mm	1300mm	91178N	91179N
1400mm	347mm	312mm	312mm	347mm	1880mm	1400mm	91120N	91112N
1500mm	367mm	332mm	332mm	367mm	1880mm	1500mm	91180N	91181N
1600mm	392mm	357mm	357mm	392mm	1880mm	1600mm	91123N	N/A

Please Note: Compensators are set at mid point giving 14.5mm in and out adjustment on both sides

Support poles

1. Upright pole extension kit

Designed to give additional strength and rigidity to any screen options with a post. The upright pole extension is 940mm long and can be cut to length as required.

Pole diameter is 32mm.

Product code: 24212

2. Back support pole

Suitable for vertical poles where upright support posts may need additional support. The back support pole is 870mm and can be cut to suit tray width.

Pole diameter is 32mm.

Product code: 24211





Extra wide compensator

Designed to give approximately 50mm additional width to a standard shower screen enclosure area. Also for use with a pipe duct kit or where pipes have been boxed in.

Width: 105mm

Height: 750mm, 900mm or 1870mm



Description		Wet floor
750mm	Non handed	24139
750mm	Left (short)*	24140
750mm	Right (short)*	24141
900mm	Non handed	24142
900mm	Left (short)*	24143
900mm	Right (short)*	24144
1870mm	Non handed	24145
1870mm	Left (short)*	24146
1870mm	Right (short)*	24147

^{*} For use with Pipe duct kits

Freeway portable shower screens

At 750mm and 900mm high, Freeway screens are ideal for use as a splash protector for a carer and can be used on designated trays or wet floors. D handles fitted as standard for ease of lifting and placement. Weight is between 10-13 kgs.













Freeway 2 Panels (650x650mm)	750mm code: 15166	900mm code: 15342
Freeway 2 Panels (750x750mm)	750mm code: 15165	900mm code: 15343
Freeway 2 Panels (1000x1000mm)	750mm code: 15137	900mm code: 15344
Freeway 3 Panels (350x700x350mm)	750mm code: 15136	900mm code: 15301
Freeway 4 Panels (400x225x225x400mm)	750mm code: 15135	900mm code: 15345

White panels & coloured trays

White polypropylene panels can be specified in place of translucent panels. Coloured trays are also available as special orders on specific trays only please call 01905 823299 for details.

Handles & latches

D-handles

Supplied as standard on most corner bi-parting doors but can be supplied on other doors if required. D-handles are also available in Blue (RAL5005) for the partially sighted.

White D-handle: 24105WH Blue D-handle: 24105BU

Door latches

Supplied as standard on all bi-fold and bi-parting doors. Door latches are also available in Blue (RAL5005) for the partially sighted.

White D-handle: 24106WH Blue D-handle: 24106BU



Window spanning kit

Robust and easy to fit, AKW's window spanning kit provides a simple solution to difficult curtain rail installations.

Consisting of 2 brackets and 1 length of trim to fit curtain track (1.5m long) it is robust and easy to fit.

Kit includes:

- Special Wall brackets
- Hooks and Gliders
- Single Curtain 1400mm long


Product code: 24210

Additional curtain rail wall fixing brackets (if going to a flush wall)

Product code: 24213

Window Spanning Kit 1400mm

> Track arrangement on a typical cubicle.

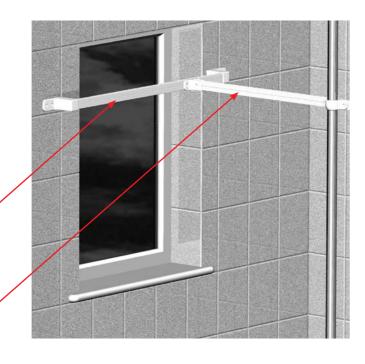

Heavy duty curtains

Width	Drop	Product Code
1800mm	2000mm	24082
2400mm	2000mm	24083
2400mm	1800mm	24084
1800mm	1800mm	24085

Curtain material 100% woven polyester.



Non-handed curtain track systems

'L' SHAPED	1960mm 1000 x 1000mm 1500 x 1200mm 1800 x 820mm		24018 24043 24126
	1500 x 1200mm		
			2/126
	1800 x 820mm		24120
			24039
'U' SHAPED	700 x 920 x 700mm	700 x 1000mm	24002
	820 x 1120 x 820mm	820 x 1200mm	24045
U shaped rails for your screen set can be made and supplied as a special order (3600mm max).	820 x 1220 x 820mm	820 x 1300mm	24095
·	820 x 1340 x 820mm	820 x 1420mm	24091
Your chosen screen option will already include one or two upright	700 x 1620 x 700mm	700 x 1700mm	24046
support posts necessary to guarantee the structural stability of the screen set.	820 x 1720 x 820mm	820 x 1800mm	24026
	1000 x 920 x 1000mm	1000 x 1000mm	24217
To enable us to supply you with all the relevant kit parts for a successful installation please specify your chosen tray	750 x 1170 x 750mm	750 x 1250mm	24017
and screen combination when ordering special U rails.	750 x 1270 x 750mm	750 x 1350mm	24218
	750 x 1390 x 750mm	750 x 1470mm	24014
П	750 x 1770 x 750mm	750 x 1850mm	24021
	1050 x 970 x 1050mm	1050 x 1050mm	24010
	900 x 820 x 900mm	900 x 900mm	24219
	770 x 1050 x 770mm	770 x 1135mm	24220
	1220 x 1120 x 1200mm	1200 x 1200mm	24009
	820 x 1420 x 820mm	820 x 1500mm	24047
BENDY RAILS	Length 2000mm		24033
	Length 2500mm		24034
	Length 3000mm		24044
CURTAIN RAIL OO OO	Length 100mm		24036
STANDARD DROP ROD	Length 600mm		drop.rod
SPECIAL SIZES	Made to measure	Upto 1500 x 1500mm	

Individual white curtains

Curtain lengths of your choice can be selected from the panel below and ordered separately. 1800x1800mm curtains are supplied as standard with all enclosures. Curtain material 100% woven polyester.

Rail Type & Dimensions	Width	Drop	Product Code
	900mm	2000mm	24074
	1800mm	1400mm	24075
	1800mm	1800mm	24076
	1800mm	1900mm	24077
	1800mm	2000mm	24078
	1800mm	2100mm	24079
	1800mm	2400mm	24080
	2135mm	2135mm	24073
	Additional Hooks & Glide	ers (12 pack)	24092
	Pack of 12 Curtain Rings	S	24081

Made to measure


In addition to standard screens, AKW offer a made to measure screen service and can manufacture almost any screen combination to your requirements. Below are illustrations of some of the more typical requirements. Made to measure screens are normally despatched 2 working days from agreed specification. All handed screens are shown left handed. Non-handed screens are marked 'non handed'. For quotations please fax us your drawing or phone for template form to be sent to you.

Note: MM screens are non-returnable and non-refundable


MM1/MM1F Made-to-measure screen



Product code: 91160 MM1



Product code: 91161 MM1F



1 panel

MM2/MM2F Made-to-measure screen




*Example of half height screen above Product code: 91162



*Example of full height screen above Product code: 91163

Various sizes & configurations available. Fixed Panel

Single door opening out only



MM3/MM3F Made-to-measure screen




*Example of half height screen above Product code: 91164 MM3



Product code: 91165 MM3F

Various sizes & configurations available. Fixed Panel

2 x bi-parting doors



Made to measure


AKW can make special screens to fit altro floors for any of our trays. Alternatively if you require a different screen configuration and can provide us with an accurate drawing, we will be able to quote for individual requirements.

Note: MM screens are non-returnable and non-refundable

MM4 Made-to-measure screen



Example of half height screen above Product code: 91166




4 panels

Various sizes & configurations available.


Twin bi-folding doors opening in and out (illustrated) Smallest size 1160mm wide.

Bi-fold not available full height

MM5 Made-to-measure screen



*Example of half height screen above Product code: 91167




5 panels

Various sizes & configurations available. Fixed Panel

Twin bi-folding doors opening in and out

Specifying Made-to-measure screens



Note: Standard Compensators have an overall adjustment of 29mm.

For AKW trays please state:

- Tray type
- Tray size
- Tray handing (if any)
- Accurate drawing (giving measurements for panel and post sizes or door entry

For Wet Floor areas please consider:

- Rise and fall hinges to clear the floor
- Corner blocks. Trim to fit on site to fit the corner radius on safety flooring
- Accurate drawing required

For wall to wall made-to-measure screens please state:

• Dimensions A, B and C (after completion of wall tiling)

Made to measure order form

Screen order form – part 1

Photocopy this page and send us your request.

Company details:			Date:		
Requested by:			Order no:		
Please tick the box	xes for your r	equirements			
Is this screen for a wet floo	or ie. Tuff Form®?				
Is this screen for a shower	tray?	Name of tray			
If the tray is not an AKW tray	then you will need to	o provide dimensions o	f your tray on your dra	wing.	
Height of screen set:	750	900	1800	2000	other
Width / size of screen requ	uired:				
If cubicle is to go under a winding AKW and other manufacture					
Curtain rail:	Straight	L rail	U rail	Size	
Curtains (drop):	1400 180	00 (standard)	1900	2000	
	2100	2135	2400		
Heavy duty curtains (drop): 1800	2000			
Other requiremen	ts				
Curve corner radius blocks	s Extra	wide compensators			
Post extensions:	Post / ceiling	Post / wall			
Handles latches:	White	Blue			
Ramps: 18r	mm high 3	8mm high	Straight	Left hand	Right hand
Failure to supply us with the	ne relevant details a	t time of order may o	ause a delay in your o	order being made.	

Complete this form and return it to: AKW Medi-Care Ltd, Pointon Way, Hampton Lovett, Droitwich Spa, WR9 0LR Fax: 01905 823297 Email: sales@akw-medicare.co.uk

Made to measure order form

Screen order form – part 2

Photocopy this page and send us your request.

Detailed drawing	

Declaration

Signed:

I, the customer confirm that I have checked all of the above details and agree that the information provided on this form is correct. I confirm that I would like to proceed within the manufacturing of this screen. I accept responsibility for payment if I have given any wrong information. I am aware that made to measure screens are non-refundable and non-returnable.

Print name:

Office use only		
Ontion	Authorized for processing	Data
Option:	Authorised for processing	Date
Option:	Authorised for processing	Date

Complete this form and return it to: AKW Medi-Care Ltd, Pointon Way, Hampton Lovett, Droitwich Spa, WR9 0LR Fax: 01905 823297 Email: sales@akw-medicare.co.uk

Date:



Showers

Showering is an important part of life that's why we've carefully chosen a range of care showers to give you safe and comfortable showering, whatever your space or need

Benefits

- Developed and selected for the mobility and domestic market
- All designed for easy operation
- Thermostatic control and adjustable temperature safeguards
- Care accessory kits supplied
- 2 year warranty as standard for peace of mind (extended options available)

Features

- Choice of showers available for varying water pressures and installation conditions
- Waste pump connectivity available
- Easy to operate levers or buttons
- Adjustable flow and anti-scalding features available

- 1 Option HF Shower Screen

2 Mullen® Shower Tray

- 3 4000 Series Seat
- 4 Versability Kit
- 5 Luda® Electric Care Shower
- 6 Closed Coupled Dual Flush Toilet with Spatula Flush
- 7 500mm Washbasin
- 8 White Support Fold Up Rail





Luda® A revolution in care showers

The first 'intelligent electric care shower' designed for users of all abilities, LUDA® also offers safe showering for users with restricted mobility or visual impairments.

Benefits

- High visibility tactile buttons and audio recognition make Luda® easy and safe to use
- A unique tear shape design gives more space to seated users
- Adjustable shower head, soap dish & shelf for greater comfort
- 2m extra long shower hose, for carer use
- A fluted riser rail provides extra grip and can support up to 190 kg
- 3 different flow rates to help you save water
- Additional handset holder to accommodate seated or standing user

Features

- 1 metre long riser rail doubles as a grab rail
- RNIB accreditation, IP45 rated and carries comprehensive BEAB and BEAB care approval
- Non return valve no retainer required
- Designed for easy cleaning
- 10kW power gives a consistent all year round performance
- Direct connectivity to all AKW waste pumps

Product Code: 23180WH (white riser rail) Product Code: 23180BH (blue riser rail)
















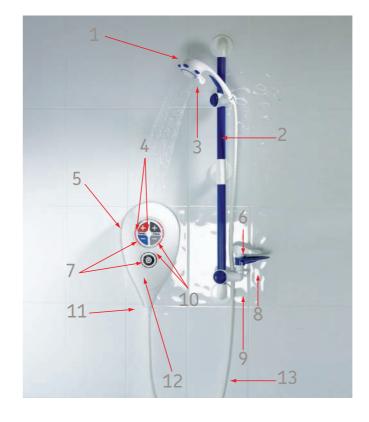

Specification	AKW Luda®
Power	10kW
Operating Water Pressure Range	Min= 0.5 bar Max= 10 bar
Flow Settings	Low= (3.5 l/min) Medium= (5.0 l/min) High= (6.5 l/min)
Max Temperature During Operating (set by DIP switch)	41 / 43 / 46 (digitally set)
Low Pressure / Low Flow Indication	✓
Over - Temperature Indication	Top Power LED Flashes
Automatic Shut-Down	After 30 minutes
Immediate Manual Restart after Automatic Shut-Down	1
BEAB Care Mark Certified	✓
BEAB Approved	✓
RNIB	✓
BEAB EMC	✓
KIWA Approved	✓
WRAS Approved	✓
Dust / Water Ingress Rating	IP 45
Phased Shut-Down	✓
Water Pipe Entry Points	Bottom, Top & Back
Electric Cable Entry Points	Top & Back
Pipework Fitting	15mm John Guest Speedfit®
Flow Meter Connection For Pumps	(Variable & Switched flow)
Guarantee Period	2 year warranty with extended options available
Min / Max Ambient Water Temperature	Min= 2°C Max= 28°C
Double Check Valve Incorporated	✓
Power On Indicator	✓
Start-Up Modes	✓
Remote Control Of Shower head with Luda Twist® Accessory	1
Shower Head Usability	✓
Riser Rail Strength	Can support loads up to 190kg
Soap Dish	✓
Riser Rail & Fittings	✓

Luda[®] characteristics

- 1. Shower head (5 spray patterns)
- 2. 1 metre grab rail
- 3. Shower head spray lever
- 4. Tactile control buttons
- 5. Shower unit
- 6. Shelf
- 7. Audible & illuminated water temperature indicators
- 8. Soap dish
- 9. Handy hook
- 10. Audible & illuminated flow rate indicators
- 11. Integral non return valve
- 12. Audible & illuminated start & stop button
- 13. 2 metre hose

Luda Twist®

Optional Luda Twist® features a paddle at the base, allowing the user to twist the shower head and spray where needed from a seated position. Doubles as a grab rail for extra safety.

Available in white or blue for visually impaired users.

- The Luda Twist® is a special fluted grab rail offering added benefits to the seated user
- The paddle lever normally locks the grab rail so it behaves like any other fixed grab rail, but when lifted (even with a clenched fist) the user can twist the rail to direct the shower head & spray just where they need it!
- The paddle can also act as another soap dish
- The Luda Twist main soap dish stays at the base of the rail & has added hooks for face cloth, soap or shampoo containers, keeping them accessible





Luda® IncLuda Kits & Pump Connections

IncLuda kits are available with all AKW digital pumps without the need for a flow switch or sensor. Also available as an AKW Luda® IncLuda Twist®.





AKW DIGIPUMP® M1

Waste water pump

- For use with single supply or low pressure mixer showers
- Pump and controller enclosed in one unit
- Max flow rate: 16.5 litres/min*
- Non-handed unit (To fit left or right inlet)
- 22mm inlet & 22mm outlet

Additional flow sensors available



AKW DIGIPUMP® M2

Waste water pump kit

- For use with high performance showers or low pressure mixer types
- Pump and controller enclosed in one unit
- Non-handed unit (To fit left or right inlet)
- Works at low voltage to comply with BS 7671
- Max flow rate: 17 litres/min*
- 36mm inlet & 36mm outlet

Pipework connections are not supplied



AKW DIGIPUMP® M3

Waste water pump

- For use with electric and low pressure mixer showers
- Pump and controller enclosed in one unit
- Max flow rate: 13 litres/min*
- Non-handed unit (To fit left or right inlet)
- 22mm inlet & 22mm outlet



AKW DIGIPUMP® 4

High performance waste water pump

- Quiet in operation
- For use with single supply, electric or low pressure mixer showers
- Pump and controller enclosed in one unit
- Max flow rate: 12 litres/min*
- Non-handed unit (To fit left or right inlet)
- 15mm inlet & 22mm outlet
- IP45





Virtually Silent





Virtually Silent












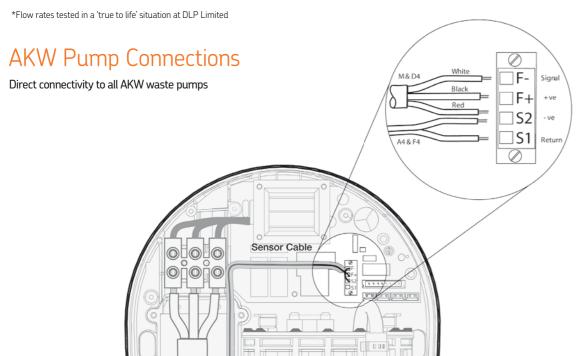

Triton Safeguard pumped care

Thermostatic electric shower

- Pumped electric for low or negligible water pressures
- Three stage thermostatic performance
- Timed shower function
- Minimum temperature set at 35°C
- Push button start/stop with phased shutdown
- Power and low flow indicators
- Extended 1m riser rail
- Waste pump connectivity to all AKW waste pumps

*water supply must be pumped, not mains fed

Product Code: 25336

Triton Safeguard T100 care

Thermostatic electric shower

- Three stage thermostatic performance
- Adjustable maximum temperature stop
- Minimum temperature set at 35°C
- · Operates even when the site has low pressure
- Earth bonding within unit
- Waste pump connectivity to all AKW waste pumps
- Timed shower function
- Raised features and contrasting moving parts
- · Power and low flow indicators
- Phased shutdown
- Extended 1m riser rail
- BEAB Care & RNIB accredited
- · Suitable for cold mains

Product Code: 25300







Independent showering for all

- Thermostatic control and adjustable temperature safeguards
- Extended lever control
- Handset with raised areas to aid touch
- Independent temperature and flow selection
- Thermostatic control to +/- 1°c with adjustable maximum temperature limit
- Extended 2m hose, 1m slide bar and additional handset holder
- RNIB Endorsement
- Rate 11 litres max
- Waste pump connectivity to all AKW waste pumps

Please note: Water supply must be mains fed, not gravity fed

Product Code: 25104









Arka® thermostatic mixer shower

This chrome mixer shower is a great addition to any modern bathroom

Benefits

- Easy to use paddle levers, suitable for users
- Adjustable head giving a choice of three spray patterns
- Independently operated flow and temperature controls for safer use
- Wall bracket allows flexible shower head positioning
- Chrome soap dish means all your showering accessories are within easy reach


Features

- Supported by TMV3 approved
- Stainless steel body with chrome finish
- Bottom outlet
- Supplied with 2m chrome hose and 1m chrome riser bar
- Fitted with check valves
- Water pressure min 0.2 bar
- Back water entry
- Maximum temperature can be set to 41 degrees
- No hose retaining ring needed providing greater flexibility

Product Code: 25420



Arka® dimensions

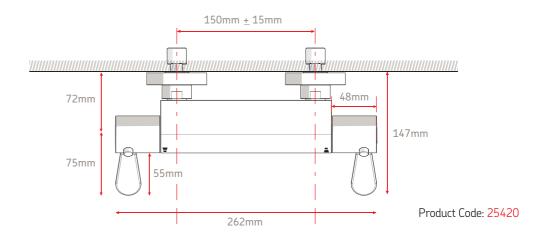

Arka® characteristics



Paddle operating levers



Shower head with 3 adjustable spray patterns



Chrome finish









AKW DIGIPUMP® 4 AKW DIGIPUMP® M3

High performance Waste water pump waste water pump

- Quiet in operation
- For use with single supply, electric or low pressure mixer showers
- Pump and controller enclosed in one unit
- Max flow rate: 12 litres/min*
- Non-handed unit (To fit left or right inlet)
- 15mm inlet & 22mm outlet
- IP45





Electric shower installation



Code: 25255



Ouiet in operation

Digital waste options



AKW DIGIPUMP® M1

Waste water pump

- For use with single supply or low pressure mixer showers
- Pump and controller enclosed in one unit
- Max flow rate: 16.5 litres/min*
- Non-handed unit (To fit left or right inlet)
- 22mm inlet & 22mm outlet

Code: 25204

Additional flow sensors available Code: 25194

Waste water pump kit

AKW DIGIPUMP® M2

- For use with high performance showers or low pressure mixer types
- Pump and controller enclosed in one unit
- Non-handed unit (To fit left or right inlet)
- Works at low voltage to comply with BS 7671
- Max flow rate: 17 litres/min*
- 36mm inlet & 36mm outlet

Pipework connections are not supplied

Code: 25214

Code: 25219



• For use with electric and low

• Max flow rate: 13 litres/min*

(To fit left or right inlet)

• 22mm inlet & 22mm outlet

pressure mixer showers

• Pump and controller

• Non-handed unit

enclosed in one unit



Virtually Silent

Virtually Silent

*Flow rates tested in a 'true to life' situation at DLP Limited

Pump diagrams

Mixer shower installation





Electrical Key 230v AC

Electrical Key 24v DC

Features

Benefits

Non-handed unit (to fit left or right inlet)

Models to suit, electric and low pressure mixer showers

Quiet in operation, no disturbing noises

Compact, with the pump and controller

enclosed in one unit

Easy to install

- Additional flow sensor are available for use with dual feed showers

Digital waste pumps

Digipump® m1, m2, m3 & m4 installation

The unit must be mounted in a vertical position with the inlet and outlet connections at the bottom, ensure the plumbing connections correspond to the arrow of flow indicated on the pump.

The pump is fitted with two sets of flow sensor wires, either can be used for single flow sensor use (mixer type showers require an additional flow sensor fitted to the hot water supply.) Flow sensors must be mounted in the water feed to the shower.

The pump allows for precise pump control of the shower water by calculating the amount of water the shower is producing. It may be necessary to adjust the pump once installation is complete. The DigiPump® range consists of pump, flow sensor with 3m flex and water filter.

(See opposite page for diagrams)

Designed and manufactured by AKW, our comprehensive range of digital shower waste

pumps suits any installation and every need where gravity drainage is not achievable



Manual waste pumps

Designed and manufactured by AKW the manual shower waste pumps accommodate a wide range of needs where gravity drainage cannot be achieved.

Benefits

- Quiet in operation, no disturbing noises
- Pump and controller enclosed in two units
- Easy to install
- Models to suit, electric or low pressure mixer showers

Features

- Non-handed unit (to fit left or right inlet)
- Additional flow switches are available for use with dual feed showers

Manual waste options

ARCHIMEDES 4

Adjustable waste water pump unit

- · For use with single supply, electric or mixer showers
- Pump and controller enclosed in two units
- Non-handed unit (to fit left or right inlet)
- 15mm inlet & 22mm outlet
- Max flow rate: adjustable up to 11 litres/min

Code: 25174

ARCHIMEDES 4F

Fixed speed waste water pump unit

- For use with electric or mixer showers
- Pump and controller enclosed in two units
- Non-handed unit (to fit left or right inlet)
- 15mm inlet & 22mm outlet
- Max flow rate: 11 litres/min (fixed)

Code: 25179

Additional flow switch available code: 25153








Electric shower installation

The pump is automatically activated via a flow switch installed in the cold water feed to the shower heater.

When the shower is switched off, the pump continues to run due to an easily adjusted run-on timer, which allows the shower tray to drain completely before the pump switches off automatically.

Electrical Key 230v AC Neutral _____ Electrical Key 24v DC Neutral




Mixer valve shower installation

The pump is automatically activated via two flow switches installed in the cold and hot water feeds. Either one can turn the pump on, but both flow switches need to be off before the pump will switch off.

When the shower is switched off, the pump continues to run due to an easily adjusted run-on timer, which allows the shower tray to drain completely before the pump switches off automatically.

Electrical Key 230v AC Neutral _____ Electrical Key 24v DC Neutral _____







Screedmaster®

With Screedmaster, you can fit a pumped waste into a floor screed without having to excavate the entire floor.

Benefits

- Enables quick and hassle free installation
- Strong enough to cope with wheelchairs and chair legs
- The waste cover can be removed for easy cleaning

Features

■ Choice of waste outlet options 15mm & 22mm these can be used with all AKW waste pumps


Screeded floor installation

AKW Screedmaster® Pumped Gulley

Complete Level access

Screedmaster® enables installers of screeded floors to fit a pumped waste into a floor screed without excavating the entire floor. Designed to withstand the rigours of wheelchairs and chair legs. The waste lid can be removed for easy cleaning.

Screedmaster® opened for easy cleaning.

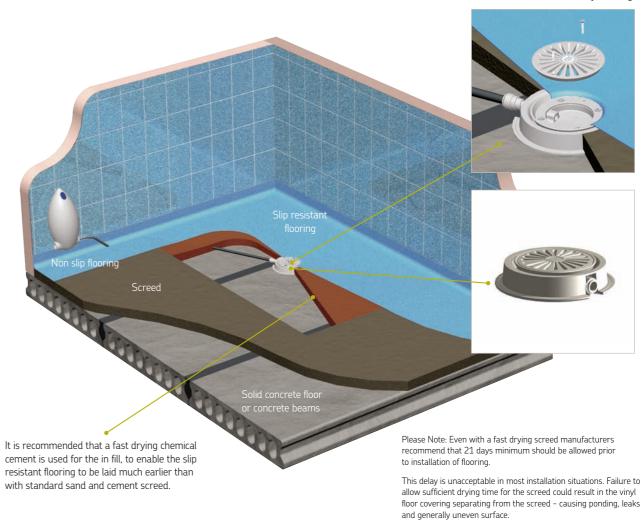

Screedmaster® Pumped Gulley

For use with graded floor installations with vinyl floor covering.

- Opens for easy cleaning and rodding
- 15 or 22mm outlet
- 32mm or 37mm deep JG Speedfit® outlet

Patent: GB2374876



Screedmaster® 15mm Pumped Gulley Code: 25100




Screedmaster® 22mm Pumped Gulley Code: 25407

Threshold kits

Aluminium ramps description	Size	Product Code
L-Shaped (non-handed)	900 x 900mm	25026
L-Shaped (non-handed)	1000 x 1000mm	25027
L-Shaped (left hand)	1135 x 770mm	25029L
L-Shaped (right hand)	1135 x 770mm	25029R
L-Shaped (non-handed)	1200 x 1200mm	25030
Threshold Kit (left hand)	1400 x 900mm	25032L
Threshold Kit (right hand)	1400 x 900mm	25032R
L-Shaped (left hand)	1300 x 820mm	25028L
L-Shaped (right hand)	1300 x 820mm	25028R
L-Shaped (left hand)	1500 x 820mm	25031L
L-Shaped (right hand)	1500 x 820mm	25031R
Straight (non handed	2000mm long	25025



see the Mobility Support Products section from pages 180-195.



Threshold kit side profile

PW50 50mm standard pumped waste

Issued as standard with both automatic and automatic mixer valve pump kits.

- · Good seals and location
- Built-in filter
- Opens for easy cleaning and rodding
- 36mm deep below mounting surface = 15mm
- 44mm deep below mounting surface = 22mm
- 15mm & 22mm John Guest Speedfit outlets available

Patent GB2375479

Depth below trav: 44mm (for 22mm) Overall Depth 50mm (for 15mm) 56mm (for 22mm)

PW90 90mm diameter pumped waste

Specially designed shallow pump gulley (for Dalby®, Mullen® & Keppel) with two baffle features that help to reduce the noise during showering cycles.

- Good seals & location
- Built-in filter
- 36mm deep below mounting surface
- · Opens for easy cleaning and rodding
- 36mm deep below mounting surface = 15mm
- 44mm deep below mounting surface = 22mm
- 15mm & 22mm John Guest Speedfit outlets available



15mm Product Code: 25122

22mm Product Code: 25405

15mm Product Code: 25105 22mm Product Code: 25406

All pumped waste outlets illustrated are exclusive to AKW.

PGTF Tuff-Form pumped gulley (15mm or 22mm)

Can be specified with any Tuff Form® former with vinyl floor covering

- 15mm or 22mm outlet pipe versions available
- · Opens for easy cleaning and rodding
- 15mm depth below tray = 35mm
- 22mm depth below tray = 44mm
- 22mm John Guest Speedfit outlets available

Patent GB 2373515





240mm

← 140mm →

15mm Product Code: 25101

22mm Product Code: 25123

Screedmaster® pumped gulley

For use with graded floor installations with vinyl floor covering.

- · Opens for easy cleaning and rodding
- 15mm & 22mm John Guest Speedfit outlet
- 32mm deep = 15mm outlet
- 37mm deep = 22mm outlet

Patent GB2375479





15mm Product Code: 25100

22mm Product Code: 25407

Upward discharge (factory fitted)

Can be specified for Braddan and Multi-Spec trays for unbreachable floors where a standard pump waste is not suitable.

- · Opens for easy cleaning and rodding
- Nothing below tray level
- 15mm John Guest Speedfit outlet

Reg Des. EU000627146-0001 Patent Pending



SS-PGTF pumped gulley (22mm only)

Can be specified with any Tuff Form® former with tiles.

- 22mm outlet pipe versions only
- Opens for easy cleaning and rodding
- 22mm depth below tray = 44mm
- 22mm JG Speedfit outlet
- Stainless steel plate dimensions = 120 x 120mm.
- Stainless steel plate height is adjustable to max of 18mm



Product Code: LB00104

All pumped waste outlets illustrated are exclusive to AKW.



Standard gravity waste with 19mm or 50mm water trap

AKW Standard gravity waste with 19mm or 50mm water trap for Braddan, Multi Spec, and Tuff Form® former with adapter.

- · Good seals and location
- Built in filter
- 93mm or 124mm deep below mounting surface
- 50mm or 19mm water trap depth (seal)
- 50mm threaded waste fitting



GW50 Patent GB2418355

113mm (for 19mm) 144mm (for 50mm)

Denth-

19mm Product Code: 25125

50mm Product Code: 25126

GW90 90mm diameter gravity waste

Can be specified with any Mullen®, Keppel and Low Profile tray.

- Built in filter
- 90mm deep below mounting surface
- Opens for easy cleaning and rodding
- 50mm water trap depth (seal)
- 90mm threaded waste fitting



GW90 Patent GB2418355

50mm Product Code: 25120

Low Depth GW90 gravity waste

The low depth gravity waste has been designed for ease of installation and flexibility of fitting. The 90mm diameter waste with a 50mm water trap is suitable for Low Profile, Mullen, Keppel and Dalby trays where height restrictions are an issue.

- Depth below tray 60mm, overall depth 82mm
- Unique swivel outlet for quick and easy installation
- 50mm water trap depth (seal)
- Opens for easy cleaning
- Built in filter
- Approximate flow rate 14 litres per minute
- Suitable for vinyl wet room floor installations



Product Code: 25404

TF75 Tuff Form® gravity waste

Can be specified with any Tuff Form® wet floor former and for any screeded floor installation in a breachable floor.

- Opens for easy cleaning and rodding
- 125mm deep below mounting surface
- 75mm water trap depth (seal)
- · Adjustable elbow for waste pipe exit

Patented GB2402946



Depth

trav



Product Code: 25106

All pumped waste outlets illustrated are exclusive to AKW.

TF75 Tuff Form® waste adaptor

(Includes GW50 50mm or GW19 19mm standard waste)

This adaptor ring allows a typical top clearing waste to be fitted into a Tuff Form® wet floor former.

- Opens from above for easy installation
- 50mm or 19mm trap versions available

EU Reg Des. 000135702-0009

* when tested to conditions of BS EN 274 Part2: 2002



19mm Product Code: 25129 50mm Product Code: 25124

Low Depth GW90 gravity waste Tuff Form® adaptor

The low depth gravity waste is suitable for use with the Tuff Form® tray if fitted in conjunction with the Tuff Form® waste adapter.



Overall

Depth

82mm

Overall Depth 128mm

(for 19mm)

(for 50mm)

159mm

Product Code: 25409

SS-TF75 gravity waste

Can be specified with any Tuff Form® wet floor former and for any screeded floor installation in a breachable floor

- Opens for easy cleaning and rodding
- 125mm deep below mounting surface
- 75mm water trap depth (seal)
- · Adjustable elbow for waste pipe exit
- Stainless steel plate dimensions = 120 x 120mm.
- · Stainless steel plate height is adjustable to max of 18mm with adhesive



Product Code: LB00101

SS-TFWA waste adaptor (includes GW50 50mm or GW19 19mm standard waste)

This adaptor ring allows a typical top clearing waste to be fitted into a Tuff Form® wet floor former.

- Opens from above for easy installation
- 50mm or 19mm trap versions available
- Stainless steel plate dimensions = 120 x 120mm.
- Stainless steel plate height is adjustable.
- Stainless steel plate height is adjustable to max of 18mm

EU Reg Des. 000135702-0009



Depth below trav: 97mm (for 19mm) 128mm (for 50mm)

Overall Depth 128mm (for 19mm) 159mm (for 50mm)



Depth below tray: 97mm (for 19mm) 128mm (for 50mm)

Overall Depth 128mm (for 19mm) 159mm (for 50mm)

SS-TFWA Product Code: LB00171 GW19 Product Code: LB00103 GW50 Product Code: LB00102

All pumped waste outlets illustrated are exclusive to AKW.





- 1 Fold Up Support Rail
- Close Coupled Dual Flush Toilet with Spatula Flush
- 3 White Ergonomic Toilet Seat
- 4 Option (M) Shower Screen
- 5 Braddan Tray Series
- 6 4000 Series Shower Seat
- 7 Luda® Electric Care Shower
- 9 Ergonomic wash basin
- 10 Fluted grab rail

Shower seats

AKW offers a wide range of shower seats which have been developed in consultation with occupational therapists, end users and installers to ensure functionality and safety without a compromise in style.

Features

- Made from strong polyethylene
- Drain holes reduce water retention and helps with cleaning
- Rust proof frames manufactured from stainless steel and powder coated with white finish
- Stainless steel adjustable support legs allow for height adjustment and stability
- Additional 26mm fine adjustment on one leg to accommodate the fall in shower trays or formers
- Feet finished with white rubber ferrule to prevent slipping and damage to the surface
- Drop down arm angle can be finely adjusted to suit the individual
- Cushions and outer body of arms are made from polyurethane which does not absorb water

Benefits

- Easy to use and suitable for any showering needs
- Designed for strength and comfort from rust proof material
- Rounded and smooth edges, soft feel arms allow for a safe and easy side transfer
- Soft, padded seat and back cushions can be easily removed and cleaned
- Padded arms for additional comfort
- A wide choice of options from wall mounted, hanging, freestanding to portable seats
- Seat size options suitable to accommodate all user types





4000 series Fold up shower seats

4000 series shower seats have been designed to accommodate a variety of individual needs of end users, with options including backrest, padded arms and adjustable legs they provide much needed support to seat users.

- Designed in consultation with occupational therapists, end users and installers
- Adjustable for comfort, with seat heights of between 390–640mm (provided by two sets of leg height supplied as standard)
- Sturdy design, carries weight up to 254kg/40 stone
- Independent folding arms make it suitable for side transfers
- + or 13mm fine adjustment to foot or support leg to allow for gradient in floor


Features


- Unique and innovative design will give years of trouble free service
- Quality tested to BS EN 12182:1998 & BS EN 12727:2000
- Made from rust proof stainless steel

Standard shower seat

Seat colour	Arm colour	Product code
White		04070
Blue padded		04070P
Grey padded		04270P
Accessories		
Blue spare seat cushion		04170
Grey spare seat cushion		04270













Extra wide shower seat

Seat colour	Arm colour	Product code
White		04110
Blue padded		04110P
Grey padded		04210P
Accessories		
Blue spare seat cushion		04175
Grey spare seat cushion		04275











Larger extra wide shower seat


Seat colour	Arm colour	Overall width	Min. tray width	Max weight	Product code
White Blue padded Grey padded	N/A N/A N/A	660mm 660mm	820mm 820mm 820mm	40 stone / 254kg 40 stone / 254kg 40 stone / 254kg	04570 04580P 04570P
Accessories					Product code
Spare blue extra wide seat cushion Spare grey extra wide seat cushion				04585 04575	

Standard horseshoe seat

Seat colour	Arm colour	Product code		
White	N/A	04100		
Blue padded	N/A	04100P		
Grey padded	N/A	04200P		
Accessories				
Blue spare horseshoe seat cushion		04180		
Grey spare horseshoe seat cushion		04280		



Drawings are for illustrative purposes only. Standard & horseshoe shower seats are the same dimensions

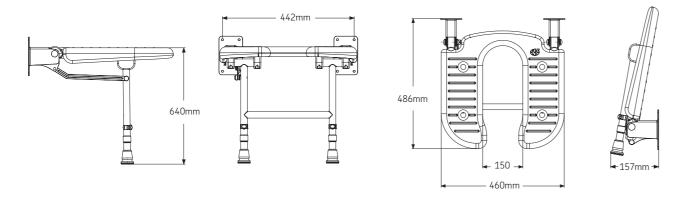



Extra wide horseshoe seat

Seat colour	Arm colour	Product code
White	N/A	04120
Blue padded	N/A	04120P
Grey padded	N/A	04220P
Accessories		
Blue spare horseshoe seat cushion		04185
Grey spare horseshoe seat cushion		04285



Drawings are for illustrative purposes only. Standard & horseshoe shower seats are the same dimensions

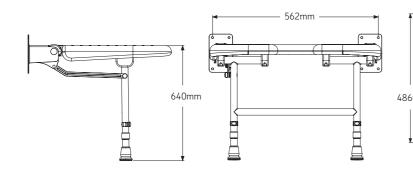





Standard shower seat

Seat colour	Arm colour	Product code
White	Blue	04130
Blue padded	Blue	04130P
White	Grey	04230
Grey padded	Grey	04230P
Blue spare seat back		04190
Grey spare seat back		04290
Blue spare seat cushion		04170
Grey spare seat cushion		04270



Drawings are for illustrative purposes only. Standard & horseshoe shower seats are the same dimensions









Extra wide shower seat


Seat colour	Arm colour	Product code
White	Blue	04140
Blue padded	Blue	04140P
White	Grey	04240
Grey padded	Grey	04240P
Accessories		
Blue spare seat back		04195
Grey spare seat back		04295
Blue spare seat cushion		04175
Grey spare seat cushion		04275



Drawings are for illustrative purposes only. Standard & horseshoe shower seats are the same dimensions












Standard horseshoe seat

Seat colour	Arm colour	Product code
White	Blue	04160
Blue padded	Blue	04160P
White	Grey	04260
Grey padded	Grey	04260P
Accessories		
Blue spare seat cushion		04180
Grey spare seat cushion		04280














Extra wide horseshoe seat

Seat colour	Arm colour	Product code
White	Blue	04150
Blue padded	Blue	04150P
Grey padded	Grey	04250P
Accessories		
Blue spare horseshoe seat cushion		04185
Grey spare horseshoe seat cushion		04285












Fold up wooden slatted seat with support legs

- Made from ecologically friendly rubberwood (dense grain)
- Very stable with minimal shrinkage
- Profiled edges are varnished to give greater comfort and durability
- Framework and legs made from rust proof stainless steel (lifetime warranty)
- Suitable for users up to 40 stone/254kg in weight
- Seat height adjustment 390mm to 640mm

Product code: 04030



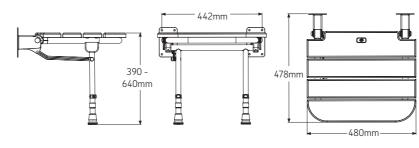







Wooden shower stool


- Made from ecologically friendly rubberwood (dense grain)
- Very stable with minimal shrinkage
- Tested to BS EN 15373:2007
- Profiled edges are varnished to give greater comfort and durability
- Framework and legs made from rust proof stainless steel (lifetime warranty)
- Suitable for users up to 40 stone/254kg
- Adjustable legs allow 25mm increments between 410mm and 535mm

Product code: 05080











Fold up shower seats


AKW 2000 series shower seats are carefully designed, comfortable and rust proof. The compact option is designed for smaller enclosures and where space is limited.

- Made from rust proof aluminium
- Compact option, designed for smaller enclosures and where space is limited
- Comfortable in use
- Adjustable seat height 467mm to 607mm
- Tested to BS EN 12727
- For users up to 158kg/25 stone
- + or 13mm fine adjustment to support leg to allow for gradient in floor

Please note: 2000 Series seats are not supplied with an extra

Compact fold up shower seat

Seat colour	Arm colour	Product code
White	N/A	02000
Grey	N/A	02000P
Blue	N/A	02200P

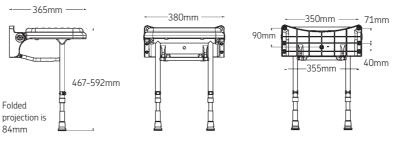




Accessories	Product code
Blue spare seat cushion	02015
Grey spare seat cushion	02215

Standard fold up shower seat

Seat colour	Arm colour	Product code
White	N/A	02010
Grey	N/A	02010P
Blue	N/A	02210P

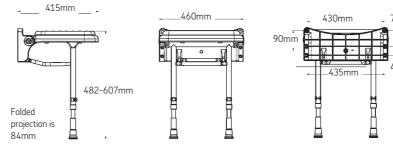




Blue spare seat cushion	02011
Grey spare seat cushion	02211

Standard fold up shower seat with back & arms

Seat colour	Arm colour	Product code
White	Grey	02130
White	Blue	02230
Grey	Grey	02130P
Blue	Blue	02230P

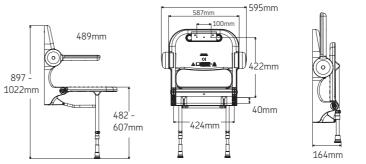



Accessories	Product code
Blue spare seat cushion	02011
Grey spare seat cushion	02211
Blue spare back cushion	02212
Grey spare back cushion	02112





2000 Series shower seat hanging seat bracket

- Enables seat to be hung from versability grab rail system (page 184)
- Multiple positioning options
- Easy adjustment of seat height without re-drilling the walls
- Perfect for paediatrica use seat height changes as child grows
- Ideal for multiusers showers and seat can be removed or repositioned in enclosures



Description	Product Codes
2000 Series Fold up Shower Seat with hanging bracket (GR padded arms	02131
2000 Series Fold up Shower Seat with hanging bracket (Fully padded GR)	02131P
2000 Series Fold up Shower Seat with hanging bracket (BU padded arms)	02231
2000 Series Fold up Shower Seat with hanging bracket (Fully padded BU)	02231P

Abbey moulded bath seat

- 450mm wide x 350mm deep for generous comfort
- Easy to pack away and store or carry, ideal for travelling
- Provides confidence for users up to 30stone/190kg in weight
- Adjustable with four height options
- Plasticised pvc suction feet on each leg for added stability
- Aperture in seat area facilitates intimate hygiene
- Drainage holes allows quick drying after use
- The seat can be set at 150mm (6") or 250mm (10") heights
- If required an additional set of legs can be purchased to increase the height to 200mm (8") or 300mm (12")

Width: 450mm Depth: 350mm

Description	Product code
Abbey Bath Seat with 6-10" legs	22400
Additional Set of 8-12" legs	22409



Designed to allow the seat to be set at 150mm (6") or 250mm (10") heights.

If required an additional set of legs can be purchased to enable the height to be set at 200mm (8") or 300mm (12").



Upper height setting

Patent GBZ410426





Height: 150mm



Height: 250mm



Height: 200mm



Height: 300mm





1 Concave Wash Basin

- 3 Stainless Steel Fold Up Grab Rail
- 4 Arka Mixer Shower
- 6 Level Best Screen
- Close Coupled Dual Flush Toilet and Spatula Flush Handle
- 5 Wooden Slatted Shower Seat 8 Stainless Steel Support Rail
 - 9 Tuff Form® Former with Stainless Steel Waste

Mobility support

Carefully designed around you, all our Mobility support products are designed to help you make the most of your home, whatever your needs

Our extensive mobility range includes

- Heavy duty grab rails
- Versability grab rail system
- Natural grip grab rails
- Fluted grab rails
- Stainless steel grab rails
- Flat ended stainless steel grab rails
- Flat ended mild steel grab rails
- Cranked grab rails
- Toilet plinth
- Fold up support rails
- Shower seats
- Wheeled and freestanding chairs
- Freestanding and wooden stools
- Toilet plinths
- Bath seats
- Mobility ramps



Heavy duty fluted grab rails & kits

Benefits

- Reinforced with an aluminium tubular core for added strength
- Rated to a maximum load of 190kg/30 stone*
- A 38mm rail to wall clearance
- Choice of 5 fixing points for optimum wall fixing
- Fluted surface gives additional grip

Features

- Made from extruded plastic uPVC
- Available in white or blue for the visually impaired
- Tested to BS EN 12182:1999
- No electrical earthing is required

Heavy duty grab rails



Grab Rail - Blue



Grab Rail - White



tubular core for greater

strength

32mm dia -813mm Product shown: 01900WH Product shown: 01930WH

Straight grab rails Cannot be trimmed

Length	Arm colour	Diameter	Box quantity	Product code
305mm	White	32mm	20	01900WH
	Blue	32mm	20	01900BU
407mm	White	32mm	20	01905WH
	Blue	32mm	20	01905BU
457mm	White	32mm	20	01910WH
	Blue	32mm	20	01910BU
610mm	White	32mm	10	01920WH
	Blue	32mm	10	01920BU
813mm	White	32mm	10	01930WH
	Blue	32mm	10	01930BU
914mm	White	32mm	10	01940WH
	Blue	32mm	10	01940BU
1067mm	White	32mm	10	01950WH
	Blue	32mm	10	01950BU


90° angled grab rails Can be trimmed as per instructions

Length	Arm colour	Diameter	Box quantity	Product code
610 x 610mm	White	32mm	1	01925WH
610 x 610mm	Blue	32mm	1	01925BU

135° angled grab rails Can be trimmed as per instructions


Length	Arm colour	Diameter	Box quantity	Product code
455 x 455mm	White	32mm	1	01915WH
455 x 455mm	Blue	32mm	1	01915BU

^{*} Maximum weight capacity refers to the grab rail only, not the user weight fixings or retention in the mounting surface.





Suitable for use with 2000 Series seat see page 176.

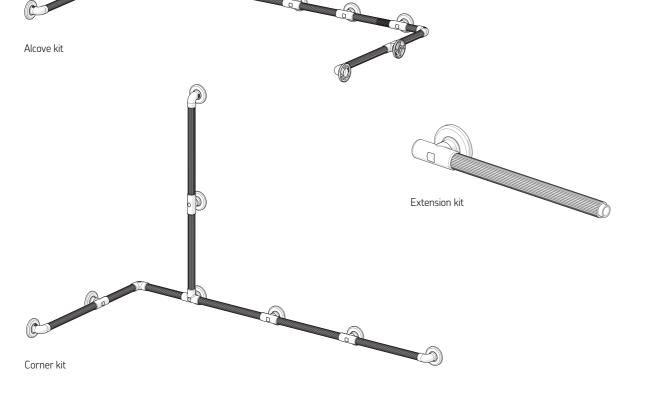

Versability kits Can be trimmed as per instructions

Length	Arm colour	Diameter	Box quantity	Product code
Corner kit	White Blue	32mm 32mm	1800 x 820mm	01942WH 01942BU
Alcove kit	White Blue	32mm 32mm	820 x 1800 x 820mm	01941WH 01941BU
Extension kit	White Blue	32mm 32mm	450mm	01943WH 01943BU



01600BU Natural Grip Grab Rail - Blue

1600 series Natural grip grab rails

Benefits

- Unique 'warm feel' polypropylene for comfort
- Reinforced with a stainless steel (rust proof) core for added strength
- A 46mm rail to wall clearance
- Ergonomically designed with a distinctive grip
- Tested to withstand loads of up to 125kg/19.5 stone*

Features

- Also available in white or blue for the visually impaired
- Tested to BS EN 12182:1999
- No electrical earthing is required
- Includes 5 fixing points for optimal strength
- * Maximum weight capacity refers to the grab rail only, not the user weight fixings or retention in the mounting surface.



Natural grip grab rails

Straight grab rails

Length	Arm colour	Diameter	Box quantity	Product code
300mm	White	32mm	20	01600WH
	Blue	32mm	20	01600BU
450mm	White	32mm	20	01610WH
	Blue	32mm	20	01610BU
600mm	White	32mm	20	01620WH
	Blue	32mm	20	01620BU

90° angled grab rails

Length	Arm colour	Diameter	Box quantity	Product code
600 x 600mm	White	32mm	1 1	01630WH
600 x 600mm	Blue	32mm		01630BU
1450 x 1200mm	White	32mm	1	01635WH
1450 x 1200mm	Blue	32mm		01635BU
450 x 450 x 1200mm	White	32mm	1	01645WH
450 x 450 x 1200mm	Blue	32mm		01645BU

135° angled grab rails

Length	Arm colour	Diameter	Box quantity	Product code
450 x 450mm	White Blue	32mm 32mm	1 1	01640WH 01640BU



Plastic fluted grab rails


Benefits

- A 59mm rail to wall clearance
- Suitable for internal use
- Fluted surface gives additional grip and can support loads up to 100kg/15.5 stone*

Features

- Made from high quality uPVC
- Option of 5 fixing points for optimum wall fixing
- Also available in white or blue for the visually impaired
- Tested to BS EN 12182:1999
- No electrical earthing is required.

^{*} Maximum weight capacity refers to the 600mm grab rail only, not the user weight fixings or retention in the mounting surface.







Plastic fluted grab rails

Length	Arm colour	Diameter	Box quantity	Product code
300mm	White	32mm	25	01400WH
	Blue	32mm	25	01400BU
450mm	White	32mm	25	01410WH
	Blue	32mm	25	01410BU
600mm	White	32mm	20	01420WH
	Blue	32mm	20	01420BU

90° angled grab rails

Length	Arm colour	Diameter	Box quantity	Product code
600 x 600mm	White	32mm	1	01430WH
600 x 600mm	Blue	32mm		01430BU

135° angled grab rails

Length	Arm colour	Diameter	Box quantity	Product code
450 x 450mm	White	32mm	1	01440WH
450 x 450mm	Blue	32mm	1	01440BU

1200 series

Flat end stainless steel grab rails

- Flat ended stainless steel tubular grab rail
- Suitable for internal or external usage
- Available in white or brown polyester epoxy powder coating
- Colour options provide discrete external appearance
- 25mm diameter with 43mm hand to wall clearance
- 2 hole fixings on each end
- ASTM B117-87 96 hour salt spray tested
- Lifetime warranty on stainless steel

Product code: 01210WH



445mm	25mm dia.	
	43mm	-560mm

Length	Arm colour	Diameter	Box quantity	Product code
305mm	White	25mm	50	01200WH
305mm	Brown	25mm	50	01200BR
445mm	White	25mm	50	01210WH
445mm	Brown	25mm	50	01210BR
610mm	White	25mm	50	01220WH
610mm	Brown	25mm	50	01220BR

Stainless steel grab rails

- Made from high grade stainless steel
- · Polished finish
- 32mm diameter
- 3 fixing points
- Captive flange covers
- Tested to BS EN 12182:1999 • 56mm rail to wall clearance
- Max central load 150kg/23.5 stone*
- * Not reinforced with stainless steel core.



Le	ength	Arm colour	Diameter	Box quantity	Product code
30	00mm	Chrome	32mm	1	01230
4!	50mm	Chrome	32mm	1	01231



Mild steel flat end grab rails

- Flat ended mild steel tubular grab rail
- Available in white polyester epoxy powder coating
- Coating process includes rust inhibitor treatment
- 25mm diameter with 43mm hand to wall clearance and 1.2mm wall thickness
- 2 hole fixings on each end
- ASTM B117-87 96 hour salt spray tested

Product code: 01830WH/BU

Length	Colour	Diameter	Box Quantity	Product Code
305mm	White	25mm	50	01000E
445mm	White	25mm	50	01010E
600mm	White	25mm	50	01020E



Product Shown: 01000E






Product Shown: 01010E

50mm Plinth





Product Shown: 01020E




Toilet plinth


• Raises heights of existing toilet pans for easy access and side transfer

443mm	456mm
215mm	220mm
242mm	380mm = 380mm

75mm Plinth



Size	Colour	Product code
50mm	White	25042
75mm	White	25044
100mm	White	25043



1700 series

1720, 1730, 1740, 1750, 1760 & 1770 cranked grab rails

- Offset design allows the user to step up to and through the doorway without releasing the grip
- Spacious design avoids the possibility of hand grazing
- Manufactured from a longer lasting cold drawn mild steel tube
- Available in white or brown to complement colour schemes
- Suitable for all internal applications, except for bath & shower rooms
- Flat ended cranked rail for use by doorway
- Finishing process includes rust inhibitor treatment
- Powder coated

Cranked grab rails

Length	Arm colour	Diameter	Box quantity	Product code
630mm	White	26.7mm	35	01750
445mm*	White	26.7mm	20	01760
445mm	Brown	26.7mm	20	01770

*Overall length 445mm, effective length (to hold) is 334mm



1720 floor to ceiling support rail

- 2750mm x 37mm diameter
- Made from mild steel and ribbed PVC
- Polycoated plates 3 fixing points
- Trim-to-length to suit ceiling height

1730 floor to ceiling support pole

- 2750mm with 740mm high stay
- Made from mild steel and ribbed PVC
- Polycoated plates 3 fixing points
- Trim-to-length to suit ceiling height
- Stay is not trimmable



1740 Newel rail

- 90° turn around the newel post
- Provides additional grip while using
- Made from cold drawn mild steel tube
- Finishing process includes rust inhibitor treatment
- 3 hole fixing flange
- Available in left and right handed
- Tested to ASTM B117-87 salt spray test
- White epoxy resin coated



1730 floor to ceiling support pole is illustrated

Floor to ceiling support rail

MONIO PINON

i toor to celli	ig suppoi	Cran		
Length	Colour	Diameter	Box quantity	Product code
2750mm	White	37mm	1	01720
2750mm	White	37mm	1	01730

Newel rail

Length	Colour	Diameter	Box quantity	Product code
707mm	White	32mm	10	01740L
707mm	White	32mm	10	01740R





Fold up rails


- · Strong design for additional support
- Folds neatly back to the wall to maximise space
- Ideal for use in multi-user bathrooms
- Epoxy resin coating and rust inhibitor treatment for longer life
- Made from 32mm diameter steel projecting 765mm from wall
- Tested to ASTM B117-87 salt spray test
- · Supplied with optional fit toilet roll holder

Product code: 01830WH/BU



Fold up double support rail

- · Available in white or blue for users with impaired vision
- · Supplied with optional fit toilet roll holder
- Max user weight: 100kg (15½ stone/220lb)



Fold up double support rail with leg

- Available in white or blue for users with impaired vision
- Supporting leg gives additional strength and stability
- Leg can be down to length
- Height to top of rail 680mm
- Supplied with optional fit toilet roll holder
- Max user weight: 200kg (30 stone/440lb)

Product code: 01820WH/BU





Fold up double support rail with adjustable leg

- Available in white or blue for users with impaired vision
- Supporting leg for additional strength and stability
- Supporting leg adjusts in 25mm increments
- Minimum to maximum height of top rail is 680mm to 880mm
- + or 13mm fine adjustment to foot of support leg
- Supplied with optional fit toilet roll holder
- Max user weight: 200kg (30 stone/440lb)

Product code: 01830WH/BU Fixing plate





Stainless steel fold up rails

- Fold-up design gives you more room, especially where space is limited
- Ideal for multi-user environments
- An adjustable supporting leg ensures added strength and stability
- Supporting leg adjusts in 25mm increments
- Integral stainless steel toilet roll holder
- Minimum to maximum height of top rail is 680mm to 880mm
- + or 13mm fine adjustment to foot or support leg
- Max user weight: 200kg (30 stone/440lb)



Product code: 0183055

Length	Arm colour	Diameter	Box quantity	Product code
765mm	White/Blue	32mm	1	01810WH / BU
765mm	White/Blue	32mm	1	01820WH / BU
765mm	White/Blue	32mm	1	01830WH / BU
765mm	Stainless steel	32mm	1	01830SS

Freestanding shower stool

- Plasticised pvc suction feet provide added stability and security
- Adjustable aluminium legs and drain holes allow the product to dry easily after use
- Supplied flat packed in kit form

Width: 500mm Depth: 300mm

Height: 350mm - 500mm

Max user weight: 127kg (20 stone/280lb)

Product code: 02300

Freestanding shower stool with back

- · A back support gives extra comfort
- · Plasticised pvc suction feet provide added stability and security
- Adjustable aluminium legs and drain holes allow the product to dry easily after use
- Supplied flat packed in kit form

Width: 500mm Depth: 300mm Seat back: 340mm

Seat height: 350mm - 500mm

Max user weight: 127kg (20 stone/280lb)

Product code: 02310





03000



(Wheeled) Product code: 03010

Standard & wheeled shower chair • A portable shower chair with rubber feet to prevent slipping or damage to the shower surface

- Plastic moulded seat, contoured for comfort
- Mild steel frame, plastic coated for added rust resistance
- Drain holes allow the product to dry easily after use

Please note. Only the front two wheels have brakes.

Seat width: 450mm Seat height: 520mm Overall height: 870mm

Max user weight: 125kg (20 stone)





Wheeled shower chair with removable arms

- Portable wheeled shower chair with brakes for safety
- Removable arms allow for easy side transfer
- Plastic moulded seat contoured for comfort
- Mild steel frame, plastic coated for added rust resistance
- Drain holes allow the product to dry easily after use

Please note. Only the front two wheels have brakes.

Seat width: 450mm Seat height: 520mm Overall height: 870mm

Max user weight: 125kg (20 stone)

Product code: 03020





Bariatric Product range



Larger Extra Wide Shower Seat



Extra Wide Seat with back & arms



1900 series grab rails




Extra Wide Horseshoe Seat

Benefits

- Specifically designed to offer choice to larger clients
- Extra comfort, space and support
- Extensive range of extra wide shower seats offering additional space when showering
- Includes a robust Mullen® shower tray providing wider accessibility and a maximum weight limit of 40 stone/254kg

Bariatric product range

Mullen® shower tray	Dimensions	Product code
Tray only	1524 x 762mm	26113L or 26113R
Tray only	1524 x 915mm	26103L or 26103R



Extra wide shower seats

Seat colo	our	Arm colour	Overall width	Min. tray width	Max. weight	Product code
White Blue Grey			580mm 580mm 580mm		40 stone / 254kg 40 stone / 254kg 40 stone / 254kg	04110 04110P 04210P

Extra wide shower seats with back & arms

Seat colour	Arm colour	Overall width	Min. tray width	Max. weight	Product code
White	Blue padded	702mm	820mm	40 stone / 254kg	04140
Blue	Blue padded	702mm	820mm	40 stone / 254kg	04140P
White	Grey padded	702mm	820mm	40 stone / 254kg	04240
Grey	Grey padded	702mm	820mm	40 stone / 254kg	04240P

Extra wide horseshoe shower seats

Seat colour	Arm colour	Overall width	Min. tray width	Max. weight	Product code
White		702mm	820mm	40 stone / 254kg	04120
Blue		702mm	820mm	40 stone / 254kg	01420P
Grey		702mm	820mm	40 stone / 254kg	04220P

Extra wide horseshoe shower seats with back & arms

Seat colour	Arm colour	Overall width	Min. tray width	Max. weight	Product code
White	Blue padded	702mm	820mm	40 stone / 254kg	04150
Blue	Blue padded	702mm	820mm	40 stone / 254kg	04150P
White	Grey padded	702mm	820mm	40 stone / 254kg	04250
Grey	Grey padded	702mm	820mm	40 stone / 254kg	04250P

Larger extra wide shower seats

Seat colour	Arm colour	Overall width	Min. tray width	Max. weight	Product code
White Blue Grey		660mm 660mm	820mm 820mm 820mm	40 stone / 254kg 40 stone / 254kg 40 stone / 254kg	04570 04580P 04570P
Accessories		Max. weight	Product code		
Spare blue extra wide s Spare grey extra wide s			04585 04575		





Mobility ramps

From simple kerb stones to more complex flights of steps, we provide a wide range of solutions for all your access needs.

- Durable. We use glass reinforced plastic, one of today's most versatile and rugged materials
- Easy handling. Folding ramps can be easily packed away
- Safety. Smooth corners prevent damage to upholstery and vehicles
- Flexible. Where thresholds on uPVC and external doors create access difficulties, one of the three designs of threshold ramps provide a simple and safe solution
- Strong. Each ramp has a distributed carrying capacity of 40 stone/240kgs
- Proven. Our standard access ramps are designed to meet the requirements of the DDA (Disability Discrimination Act) by creating a safe and conforming gradient

- Versatile. With a choice of smooth moulded side upstands, colour contrasting slip resistant surface and optionally fitted single or double handrails
- Extendable. By combining sections from our range of standard ramps with addition level platforms and joining plinths, more complex systems can be created if necessary



Please contact us for details or a survey of particular requirements

Folding access ramp - Channel ramp

Ramp type	Length	Internal track width	Overall width	Weight	Product code
CR 6FT	1830mm	203mm	292mm	12kg per pair	25060



Folding access ramp - Briefcase ramp

Ramp type	Length	Internal track width	Overall width	Weight	Product code
BR 4FT 6"	1370mm	736mm	840mm	11kg	25061



Folding access ramp - Scooter ramp

Ramp type	Length	Internal track width	Overall width	Weight	Product code
SC 6FT	1830mm	622mm	710mm	13kg	25062




Threshold ramp - Standard ramp

Ramp type	Length	Internal track width	Overall width	Weight	Product code
DT 3"	457mm	730mm	781mm	4kg	25064



Threshold ramp - 6" door ramp

Ramp type	Length	Internal track width	Overall width	Weight	Product code
DT 6"	914mm	737mm	820mm	8kg	25065



Threshold ramp - Folding ramp

Ramp type	Length	Internal track width	Overall width	Weight	Product code
Folding Threshold	1200mm	622mm	660mm	7kg	25066





Bathroom products

Our full range of sanitary ware and bathroom accessories gives you the complete bathroom solution, whatever your needs

Benefits

- Specially developed for users with reduced mobility
- Conform to national standards for guaranteed quality
- Optimal design, for maximum comfort
- Strong and reliable, with safety features
- Wide choice, to create the look you want
- Lifetime warranty for total peace of mind

Features

- Raised height toilet pans for easy access and side transfer
- Screw down cistern lids for safety and security
- Ergonomic toilet seats for easy access or side transfer
- Soft close toilet seats and lids (suitable for side transfer)
- Specially designed concave washbasin for users of wheelchairs, walking frames and perching stools

- 1 Close Coupled Dual Flush Toilet with Spatula Flush
- 2 White Ergonomic Toilet Seat
- 3 Stainless Steel Fold Up
- 4 Option HF Silverdale Shower Screen
- 5 Tuff Form® Former
- 6 Stainless Steel TF75 Gravity Waste
- 7 Arka® Mixer Shower
- 8 Stainless Steel Grab Rail
- 9 Concave Wash Basin With Semi Pedestal
- 10 Mixer Tap


AKW460L - close coupled toilet pan


This raised height, long projection toilet pan has been specially designed for use in AKW Doc M packs.

Features & specification:

- Raised height
- Large footprint
- 750mm projection to assist side transfer
- Attractively manufactured from white vitreous china
- Conforms to BS EN997
- CE Certified
- 4 point fixing to floor supplied
- Height with toilet seat is 480mm, which complies to Doc M guidelines

Toilet pan: 23160





Weight limited to 60 stone / 400kg








AKW460S - close coupled toilet pan

Features & specification:

- Raised height
- Large footprint
- 650mm projection
- Attractively manufactured from white vitreous china
- Conforms to BS EN997
- CE Certified
- 4 point fixing to floor supplied
- Height with toilet seat is 480mm, which complies to Doc M guidelines

Toilet pan: 23162



Weight limited to 60 stone / 400kg















Raised height back to wall toilet pan

Specially designed for use with the AKW low level cistern and padded back rest.

Features & specification:

- Raised height
- Large footprint
- Manufactured from White Vitreous China
- Conforms to BS EN997
- CE Certified
- · 4 point fixing to floor supplied
- Height with toilet seat is 480mm, which complies to Doc M guidelines

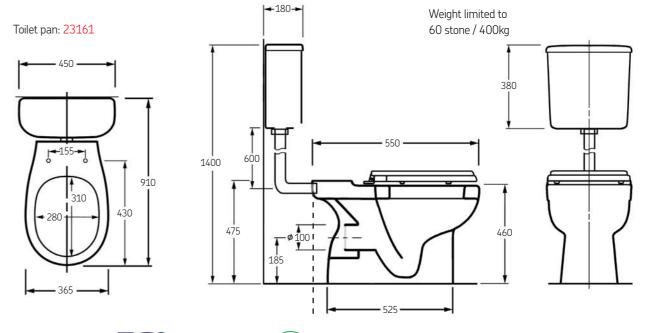

Cistern, flush valve & handle

AKW Cisterns have been designed for use with the AKW toilet pan range. Each comes supplied with a spatula dual flush handle with complete flush mechanism & fill valve. There are two available options:

• AKW close coupled cistern, for use with AKW460L & AKW460S toilet pans

WRAS

• AKW low level cistern, for use with AKW460U

Features & specification:

- · Manufactured from white vitreous china
- Screw down lid for added safety and security.
- Dual Flush 6 & 4 litre for maximum water efficiency
- WRAS approval to EN997 standards
- · Non handed, it fits either left or right
- Low level cistern comes complete with a 760 x 305mm flush pipe

Low Level Cistern: 23164 (Includes the flush pipe)

Close Coupled Cistern: 23163













AL100 alarm system

The AKW emergency audio alarm operates by a simple pull cord to allow users to raise an alarm from within a toilet or closed room. In standby mode the alarm shows a green 'power on' light. Once pulled, a flashing red 'alarm' light is triggered, along with an audio signal.

Features & specification:

- Easy to operate control panel with 2 LEDs: green for 'on', red for activated
- Reset Switch
- Long pull cord with two red bangles for ease of grip
- 12V DC Power supply
- 90dbA
- Can be connected to a 3A fused switched spur or plugged into a dedicated 3A fused, 13A plug and 230V AC supply socket
- Designed to BS8300:2009 guidelines

Emergency alarm & pull cord: 23143







Features & specification:



Flush valve and spatula handle

save water. This handle is only suitable for use with AKW cisterns.

• Non reflective satin chrome finish for partially sighted users

· Easy to operate with hand, closed fist or elbow

• Handle is unique to AKW flush valve mechanism

• Non handed, it fits either left or right

Replacement spatula flush handle: 23165

The spatula shaped design is easy to use and dual flush operation helps



Ideal for any situation where side transfer or extra stability is required, AKW toilet seats are ergonomically designed for comfort, easy cleaning and added strength.

Features & specification:


- Strong metal hinges and lugs grip the inside of the pan for added strength
- Contoured for maximum comfort
- Available in white or blue for visually impaired users, and with or without lid
- Strong metal, soft close hinges
- Easy installation
- Easy to clean
- Made from urea formaldehyde
- Width 375mm front to back 435mm

Blue toilet seat with lid: 23124

White toilet seat with lid: 23122

Blue toilet seat with no lid: 23125

White toilet seat with no lid: 23123







Weight limited to 47 stone / 300kg










This compact 400mm wash basin is specifically designed for use with the AKW Doc M pack.


Features & specification:

- 400mm (w) x 340mm (d)
- Additional bracket under washbasin for extra support
- Supplied with a waste
- Non-handed two tap hole basin, blanking plug supplied
- Easy installation

(§M

Wash Basin- 2 tap hole complete with waste trap & fixings: 23117








Concave wash basin.


Features & specification:


- Ergonomically designed for wheelchair, walking frame or perching stool users
- Concaved front to allow closer access to basin and taps
- 600mm (w) x 460mm (d)
- Includes waste trap and shroud as standard
- Full height pedestal option available

AKW Concave wash basin: 23115

Full height pedestal code: 23115-FP









450mm wide wash basin


Features & specification:


- 450mm (w) x 395mm (d)
- Supplied with a shroud to cover waste as standard
- Includes waste trap
- Non-handed two tap hole basin, blanking plug supplied
- Easy installation
- Full pedestal option available

2 tap hole wash

basin 450mm wide: 23126

Full pedestal code: 23126-FP






505mm wide wash basin


Features & specification:

- 505mm (w) x 430mm (d)
- Supplied with a shroud to cover waste as standard
- Includes waste trap
- Non-handed two tap hole basin, blanking plug supplied
- Easy installation
- Full pedestal option available

2 tap hole wash basin 505mm wide: 23127

Full pedestal code: 23126-FP





Full pedestal for wash basins

The AKW wash basin with full pedestal offers an ideal domestic bathroom option. Made from white vitreous china in a modern sleek design it is the perfect choice for any bathroom.

2 tap hole washbasin (450mm wide): 23126-FP

2 tap hole washbasin (505mm wide): 23127-FP

Ergonomic concave washbasin (600mm wide): 23115-FP



TMV3 thermostatic mixer tap

The TMV3 thermostatic mixer tap has an extended lever for easy operation using a closed fist or elbow

Features & specification:

- TMV3 approved to prevent scalding
- Integrated mixer valve for improved hygiene
- Non reflective satin chrome finish for partially sighted users

TMV3 Thermostatic mixer tap: 23116A







Monobloc spray mixer tap

Features & specification:

- For use with either one or two tap hole wash basins
- Non reflective satin chrome finish
- Easy to install
- · User friendly long handle

Monobloc spray mixer tap: 23118



Lever basin tap

Features & specification:

- Stylish chrome finish to complement modern bathroom designs
- The lever design provides a smooth and controlled 90° turn operation which is easy to operate with either a hand or an arm making it suitable for users with limited dexterity
- Easy and quick installation
- Coloured temperature indicator ring on head of tap
- Minimum working pressure 0.2 bar











Hand dryer

Suitable for all applications, the hygienic 1.6kW automatic hand dryer comes complete with a heavy duty steel cover and white powder coated finish.

Features & specification:

- Strong durable case
- · High output element for rapid drying
- Installer adjustable hand proximity sensor
- 60 second auto power cut out switch
- Temperature cut off protection
- IP21 Rated
- Power supply 230V
- Weight 4.8kg
- Dimensions: W:30 H:27 D:19
- 5 year warranty

Hand dryer HD2401: 23136












Shelving

AKW's range of white polypropylene shelving is designed for use next to the W/C, wash basin or showering area.

Features & specification:

- · Easily removed for cleaning
- Two sizes available
- Rounded edges for safety
- Hole for water drainage
- Small shelf next to the toilet is designed for placing a colostomy bag onto if required
- Larger shelf next to washbasin is available to place any items on when entering the bathroom

Small Shelf: 23145 Large Shelf: 23146









Swing bin

This easy to operate swing bin is available in white, with a blue lid for the visually impaired.

Features & specification:

- Wide opening
- Durable will not rust, chip or peel
- Dent resistant
- Swing top keeps waste out of sight
- Height: 61cm
- Width: 31cm
- Depth: 16mm

Swingbin: 23148







Liquid soap dispenser

The AKW lever operated soap dispenser has been designed for easy operation, by hand, closed fist or elbow. It is refillable by simply topping up the soap bottle using liquid soap.

Features & specification:

- Lever operated
- Extended blue lever provides better colour contrast and visibility
- Refillable
- · Manufactured from ABS plastic
- Dimensions: W:120mm H:260mm D:200mm

Lever Operated Soap Dispenser: 23142





Toilet tissue dispenser

Features & specification:

- Easy installation
- Refillable using tissue up to 110 x 110mm in size
- 240mm stack capacity
- Lockable
- Manufactured from ABS plastic
- Dimensions: W: 135mm H:290mm D:130mm

Toilet Tissue Dispenser: 23138





Paper towel dispenser

Features & specification:

- Easy installation
- Large capacity up to 350mm stack
- Accepts interleaved or C fold hand towels up to 255mm (W)
- Lockable
- · Manufactured from ABS plastic
- Dimensions: W: 285mm H: 380mm D: 110mm

Paper Towel Dispenser: 23139









Padded back rest

Features & specification:

- Aids side transfer
- Available in grey and blue
- Pad made from polyurethane foam for easy cleaning
- Made from polyurethane foam for easy cleaning
- Cushion thickness 60mm

Padded Back Rest - Blue: 01190BU Padded Back Rest - Grey: 01190GR








Mirror

Made from toughened glass, the AKW mirror is ideal for use is public bathrooms. It features an adhesive backing sheet for added safety.

Features & specification:

- High colour contrast blue border
- Manufactured from toughened glass
- Adhesive backing sheet
- 4 pre drilled fixing holes
- 1000mm high x 400mm wide

Mirror: 23147





Clothes hooks

Though AKW clothes hooks have been especially designed for use in AKW Doc M packs. Their practical design and easy installation makes them suitable for many other applications.

Features & specification:

- · Finished in blue for high contrast
- · Easy to install with fixings supplied
- Removable for cleaning

Blue Clothes Hooks: 23144







Bathroom light

Features & specification:

- IP54 2D surface mounted light fitting
- Supplied with 28 watt 2D lamp
- Diameter: 326mm
- Depth: 105mm
- Class 1 must be earthed

Bathroom Light: 23133







Low voltage bathroom extractor fan - AKW100 series

The AKW100 Series low voltage extractor fan range has been specifically designed for extra safety when used in bathrooms and showers.

- An extra low 12VAC SELV voltage and thermal fuse give you added safety at all times
- Can be wall or ceiling mounted, so suits a wide range of locations
- Made from lightweight ABS thermoplastic for long-life - and easy cleaning
- IP27 rating a mark of its safety in environments where water is present
- Three different models to match your needs exactly
- 3 Year warranty as standard for extra peace of mind

Features

- 100mm ducting diameter for safe and efficient extraction of moisture (in line with industry standards)
- Slim plastic casing for easy and discreet fitting
- Can be wired directly into bathroom light circuit
- Three different models with product options including a humidistat and adjustable overrun timer
- Designed to exceed Building Regulation (Document F) requirements

AKW100P Product code: 23152 AKW100T Product code: 23154 AKW100THP Product code: 23156







AKW100P - Extractor fan with pull cord



AKW100T - Extractor fan with timer



AKW100THP - Extractor fan with timer humidistat







1 Cloak Hooks

- 2 Mirror 400mm
- 3 Fluted Grab Rail
- 4 Fold Up Support Rail
- 5 Close Coupled Dual Flush Toilet with Cistern
- 6 Ergonomic Toilet Seat with Lid
- 7 Small Shelf
- 8 Alarm Reset
- 9 Tissue Dispenser
- 10 Paper Towel Dispenser
- 11 Soap Dispenser
- 12 TVM3 Tap
- 13 Finger Rinse Wash Basin
- 14 Hand Dryer
- 15 Large Shelf

Doc M

Purpose designed to comply with the latest building regulations relating to special needs, AKW's DOC M range offers quality and choice.

Benefits

- Wide choice of variants, to meet the needs
- Ergonomically designed for maximum comfort
- Fully compliant to BS8300:2009 guidelines for a unisex accessible WC
- Options to fit all budgets and spaces
- Extras include a thermostatic mixer tap to prevent scalding
- Fully inclusive packs, ready to go

Features

- Standard pack available in white and blue
- Water saving flush valve standard on all packs
- Screw down cistern lid standard on all packs
- Soft closing toilet seat and lid standard on all packs
- Mirror and clothes hooks included in fully compliant packs

Wheelchair-accessible unisex toilets

Design considerations

It's essential that wheelchair users are able to approach, transfer to, and use the sanitary facilities provided within a building. This means a wheelchair-accessible unisex toilet must be made available. Considerations for this facility include:



The arrangement should allow the user to wash and dry their hands while still seated on the WC.

The space provided for manoeuvring.

This should enable easy transfer from wheelchair to WC, whether the user is alone or has assistance.

Typical Doc M layout



In compliance with












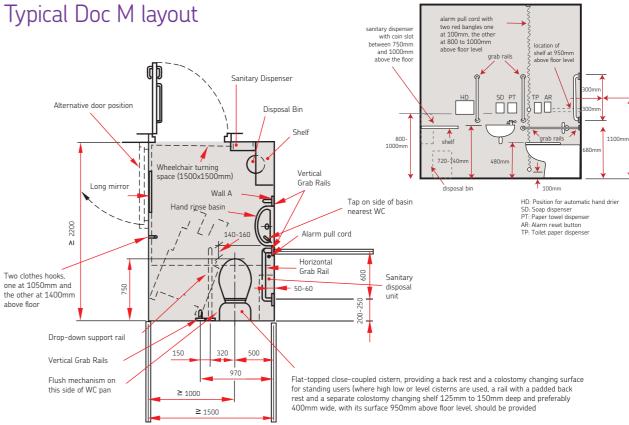

Further information

Option 1 & 2

Fully compliant to BS8300:2009 guidelines for a unisex accessible WC.

2 tap hole wall mounted wash basin

This allows a mixer tap to be fitted left or right handed and without overflow for additional hygiene.

Thermostatic sequential mixer tap

TMV3 approved to prevent scalding, the thermostat is within the mixer (and not separate, as is the case with other suppliers). This reduces the risk of legionella bacteria forming between separate parts.

Easy operational flush handle

Allowing for flushing with elbow or hand, this also offers full and half flush operation for water saving. It comes in a non-reflective stain chrome finish and can be fitted left or right handed. Conforms to EN 997.

Raised height WC

Set at 460mm high (480mm with toilet seat), it's specially designed for wheel chair access. It comes with 4 fixing points.

Ergonomic toilet seat with lid

Metal hinges and lugs secure the pan for easier side transfer. In some Doc M options it's available in high visibility blue for users with impaired vision.

Cistern

Has a screw down lid for security and safety.

Grab rails

4 x 600mm long with concealed fixings (tested up to 190kg/ 33 stone weight). In some Doc M options, they're also available in high visibility blue for users with impaired vision.

Fold up grab rail

Tested to 190kg/3 stone weight. In some Doc M options, they're also available in high visibility blue for users with impaired vision.

Liquid soap dispenser

An extended blue lever provides high visibility colour contrast and is easy to operate with either elbow or closed fist.

With toughened glass for extra safety and a blue contrasting border for visually impaired users.

Hand drier - 1.6kW

Has a heavy duty steel cover and a white powder coated finish.

Large paper towel dispenser

Uses standard size towels.

Toilet tissue dispenser

Takes standard tissue and comes with contrasting colours for visually impaired users.

Large white polypropylene shelf

530mm wide x 230mm deep with rounded edges and a hole for drainage. The shelves can be easily removed for cleaning.

Small white polypropylene shelf

215mm wide x 185mm deep with rounded edges for safety, and a hole for drainage. It can be easily removed for cleaning.

Alarm and pull cord

Mains fed and easy to install, it's manufactured to CE requirements 90dbA.

Clothes hooks

Coloured blue for visual contrast, they're easily removed for cleaning.

In grey plastic with contrasting blue swing top.

Heavy duty padded back

Helping aid side transfer, it's made from PU foam for easy cleaning. Available in grey or blue for visually impaired in some Doc M options.





Option 1

Fully compliant close coupled Doc M pack

Pack includes:

- 2 tap hole wall mounted wash basin
- TMV3 Thermostatic sequential mixer tap
- Easy operational flush handle
- Raised height WC
- Blue ergonomic toilet seat with lid soft closing
- Close coupled cistern with screw down lid
- Blue grab rails
- Blue fold up grab rail
- · Liquid soap dispenser
- Hand drier 1.6kW

- Large paper towel dispenser
- Toilet tissue dispenser
- Large white polypropylene shelf
- Small white polypropylene shelf
- Alarm and pull cord
- Mirror with toughened glass
- 2 clothes hooks
- Swing bin
- Full flush 6 litres, half flush 4 litres

Product Code: 23200



TMV3 Thermostatic sequential mixer tap



Fold up blue grab rail



Alarm & pull cord



Large paper towel dispenser



In compliance with









All items are available separately - see pages 196-207.

Option 2

Fully compliant low level Doc M pack

Pack includes:

- 2 tap hole wall mounted wash basin
- TMV3 Thermostatic sequential mixer tap
- Easy operational flush handle
- Raised height WC set at 460mm high
- Blue ergonomic toilet seat soft closing
- Low level cistern with screw down lid
- Blue grab rails
- Blue fold up grab rail
- Liquid soap dispenser
- Padded back rest

- Hand drier 1.6kW
- Large paper towel dispenser
- Toilet tissue dispenser
- Large white polypropylene shelf
- Small white polypropylene shelf
- Alarm and pull cord
- Mirror with toughened glass
- 2 clothes hooks
- Swing bin
- Full flush 6 litres, half flush 4 litres

Product Code: 23201



Toilet tissue dispenser



Swing bin



Liquid soap dispenser



Hand drier



In compliance with









All items are available separately - see pages 196-207.



Option 3

Close coupled standard Doc M pack

Pack includes:

- 2 tap hole wall mounted wash basin
- Monobloc spray mixer tap
- Easy operation flush handle for flushing
- Raised height WC
- White ergonomic toilet seat with lid
- Close coupled cistern with screw down lid
- White grab rails
- White fold up grab rail
- High visibility blue rails and toilet seat also available
- Full flush 6 litres, half flush 4 litres



Product Code: 23202 (White) / 23203 (Blue)



2 Tap hole finger rinse wash basin



White natural fluted grip grab rails



Blue toilet seat



Raised height WC



In compliance with









All items are available separately - see pages 196-207.

Option 4

Low level standard Doc M pack


Pack includes:

- 2 tap hole wall mounted wash basin
- Monobloc spray mixer tap
- Easy operational flush handle
- Raised height WC
- White ergonomic toilet seat
- Low level cistern with screw down lid

Product Code: 23204 (White) / 23205 (Blue)

- White grab rails





- High visibility blue rails, toilet seat and back rest also available
- Full flush 6 litres, half flush 4 litres



Padded back rest



White fluted grab rail



Fold up white grab rail





In compliance with









All items are available separately - see pages 196-207.







Kitchens

AKW offer two highly distinctive kitchen suites. both of which combine practical function with attractive style.

Whichever you choose, you'll be able to enjoy a range of attractive and specially designed features which enhance your home, and help you create the kitchen you want.

Call us on **01905 823 262** for more information or to receive our kitchen catalogue

Worcester kitchen

Ready to go, easy to install and representing great value for money, the Worcester is waiting to turn your dream kitchen into reality.

Benefits

- Available in a range of sizes to meet most needs
- A wide range of worktop and door options to add distinctive style
- Attractive and strong, for a long-life
- Electric or manually operated rise and fall units for multi-user kitchens
- Cupboards with pull-out or pull down baskets for easy access (optional extras)
- Wide choice of integrated appliances

Features

- High quality materials, and workmanship
- Supplied flat pack, for easy transport and storage - assembly available (optional extra)
- Available ex stock for speedy delivery
- Full nationwide design service to help you plan your kitchen
- Fully guaranteed
- Cam fittings for easy assembly
- Deep recessed plinths to accommodate wheelchair footplates so you can get nearer to the units

Independence kitchen

Specifically designed with older people and wheelchair users in mind, the Independence offers a huge choice of features and finishes, helping you create a kitchen you can live in, and love!

Benefits

- Electric or manually operated rise and fall units, so it's perfect for all the family
- Deep recessed plinths to accommodate wheelchair footplates so you can get nearer to the units
- Ergonomically calculated worktop heights, giving you maximum comfort
- Hobs with front controls for easier use
- Low level wall units for easy reach
- Wide choice of doors, worktops and carcass colours
- Range of easy grip handles

Features

- Delivered fully assembled direct to any site
- Telescopic oven shelf runners and anti-tilt devices on unit shelves for easier and safer - access
- 170 degree hinges for improved accessibility
- Special features, including a pull out ironing board
- 18mm thick materials for durability and strength
- Soft close as standard



Order form

Name of person ordering:	
Company:	
Telephone no:	Account no:
Date:	
Quantity Product code	Description
Payment method	
_	cheques payable to AKW Medi-Care Ltd)
Credit card Please debit my Visa	Mastercard Switch
Card no:	
	Casarita and a Company of the Compan
Issue no: Expiry date:	Security code:
Cardholder's name:	Cardholder's signature:
If the credit card is registered at a different address to that given b	elow, please supply it separately below.
	, р
Delivery details	
Please deliver the order to the address below.	
Name:	Position:
Company:	
Address:	
Postcode	Country:
	Fax:
Email:	

Complete this form and return it to: AKW Medi-Care Ltd, Pointon Way, Hampton Lovett, Droitwich Spa, WR9 0LR Fax: 01905 823297 Email: sales@akw-medicare.co.uk

General information

Cleaning instructions

For all AKW and mobility support products

To help maintain long-life, you should periodically clean all AKW and Mobility support products. Use normal domestic bathroom cleaning materials, and avoid any strong or concentrated acidic, alkaline or other cleaning materials. These may discolour or otherwise damage the products. After cleaning, always rinse with water and wipe thoroughly with a damp cloth to remove any cleaning material residues.

Installation information

AKW products

AKW products should be installed by an experienced and competent person. Fixings should be appropriate to the maximum rated user load, and selected to suit the condition of the surfaces to which it is being attached. The selection of any specific fixings should be made by the installer based upon the requirements for each individual installation.

Power showers / high pressure systems

AKW trays and screens are not suitable for use with power showers or high pressure systems. We recommend that you should use only AKW screens with AKW trays. These products have been designed and manufactured to be used together. Their use with non AKW products may adversely affect the integrity of the water seal between the tray and screen.

Most of our products are kept in stock for next day delivery. A few items are not immediately available and will need to be ordered. Please contact our Customer Services Team on **01905 823298** for more information.

Legal information

For all technical information please refer to the installation instructions, available as a hard copy on request or online at www.akwmedicare.co.uk

The format, layout and organisation of this catalogue and all images herein are the property and copyright of AKW Medi-Care Ltd and may not be reproduced. AKW has a policy of continuous product improvement and reserves the right to change products, specifications and dimensions without prior notice. Copyright ©2011 AKW Medi-Care Ltd. All rights reserved. This publication and any part there of may not be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, scanning or otherwise, without prior written permission. Speedfit® is the registered trademark of John Guest International Limited.

Some AKW products featured in the product literature are protected by one or more of the following U.K., U.S. or foreign patents and other pending patent applications and/or registered design or other pending design applications: GB2426194, GB2374876, GB2375479, GB2401341, GB2406270, GB2394175, GB2402946, GB2410426, EP1523914, GB205802, GB3021810, GB3020282, GB3021505, GB3016631, GB3020208, GB3023907, EU000627146-0001, EU000566849-0001, EU000343561-0001, EU000379524-0001, EU000415765-0001, EU000717541-0001/2/3/4/5, EU000694781-0001, EU000189105-0001, EU000448535-0001, EU000692249-0001, USD539394, USD36889, USD510487, USD501611, USD494767, US 6725470, US 6890427, GB3008313, GB3008314, GB3011017, GB3011018, GB3011016, GB2058001, GB2058002, EU000024591-0001/2, EU000062047-0001/2, EU000135702-0001/2/3/4/5/6/7/8/9, GB2394175, GB2306316, GB2313306, GB2315211, GB2322546, GB2373515, GB2375479, GB2359484, GB2369568, GB2372267, GB3020282.

AKW does not hesitate to undertake rigorous protection, defence and maintenance of its intellectual property assets world-wide. Unregistered design rights exist wherever permissible. All dimensions given in this brochure are approximate and subject to manufacturing tolerances. AKW Medi-Care Ltd makes no warranty, expressed or implied, or accepts any liability in connection with this information or its use. This information is furnished upon the condition that the person receiving it shall make their own tests to determine the suitability thereof for their particular purpose. The AKW device is a registered trademark of AKW Medi-Care Ltd.

"AKW®", "Archimedes®", "Arka®", "DigiPump®", "Intergrip®", "Level Best®", "Luda®", "Luda Twist®", "Mullen®", "Screedmaster®" "Silverdale®", "Tuff Form®", "Trays Direct®" and "Universal®" are all registered trademarks.

We operate a constant improvement policy and our products are subject to change without notice.

Copyright © AKW Medi-Care Ltd 2011. All rights expressly reserved



Made to measure order form

Screen order form – part 1

Photocopy this page and send us your request.

Company details:			Date:					
Requested by:			Order no:					
Please tick the	Please tick the boxes for your requirements							
Is this screen for a w	s this screen for a wet floor ie. Tuff Form®?							
Is this screen for a sh	nower tray?	Name of tray						
If the tray is not an AK\	W tray then you will nee	ed to provide dimensions of	your tray on your dr	awing.				
Height of screen set:	750	900	1800	2000	other			
Width / size of screen	n required:							
_		ease give height of ledge: an enclosure will invalidate your w						
Curtain rail:	Straight	L rail	U rail	Size				
Curtains (drop):	1400	1800 (standard)	1900	2000				
	2100	2135	2400					
Heavy duty curtains	(drop): 1800	2000						
Other requirer	nents							
Curve corner radius	blocks Ex	tra wide compensators						
Post extensions:	Post / ceiling	Post / wall						
Handles latches:	White	Blue						
Ramps:	18mm high	38mm high	Straight	Left hand	Right hand			
Failure to supply us with the relevant details at time of order may cause a delay in your order being made.								

Complete this form and return it to: AKW Medi-Care Ltd, Pointon Way, Hampton Lovett, Droitwich Spa, WR9 OLR Fax: 01905 823297 Email: sales@akw-medicare.co.uk

Made to measure order form

Screen order form – part 2

Photocopy this page and send us your request.

Detailed drawing		
Declaration		
I confirm that I would like to proce		e that the information provided on this form is correct. I accept responsibility for payment if I have given any indable and non-returnable.
Signed:	Print name:	Date:
Office use only		

Complete this form and return it to: AKW Medi-Care Ltd, Pointon Way, Hampton Lovett, Droitwich Spa, WR9 0LR Fax: 01905 823297 Email: sales@akw-medicare.co.uk

Authorised for processing

Authorised for processing




Date

Date

How to find us

Location map

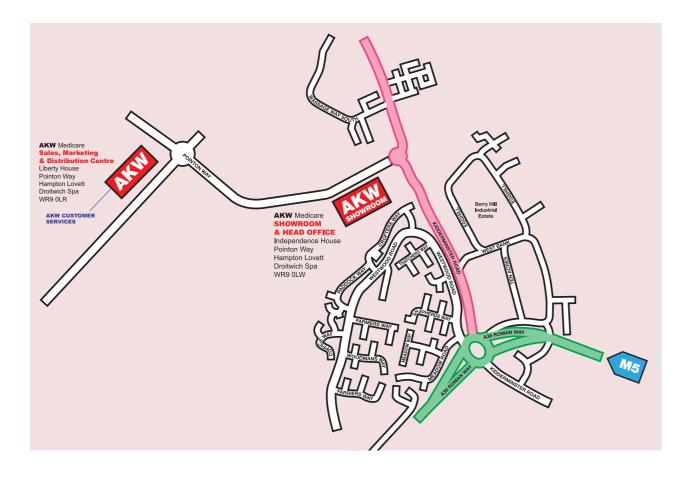

Directions

From north

- Leave the M5 at junction 5 (signposted A38 Droitwich). At the roundabout, take the 4th exit onto the A38 (signposted Birmingham M5, Droitwich)
- · At the next roundabout, take the 1st exit onto the A38 (signposted Droitwich)
- · Continue on the A38, entering Droitwich
- · At the next roundabout, take the 4th exit onto the Kidderminster Road - A442 -signposted Kidderminster
- At the Stonebridge Cross roundabout, take the 1st exit onto Pointon Way (signposted Stonebridge Cross Industrial Estate)
- The first building on your left is the AKW head office and
- For the Sales & Marketing or the distribution centre continue on Pointon Way. At the 1st roundabout take the 1st left into AKW Liberty House

From south

- Leave the M5 at junction 6, signposted Worcester (N), Kidderminster. At the roundabout, take the 3rd exit onto A4538 (signposted Droitwich)
- Continue forward onto A4538, entering Martin Hussingtree
- At the traffic signals, turn right onto the A38 (signposted Droitwich)
- · At the next roundabout, take the 1st exit onto A38 (signposted Bromsgrove)
- · Continue forward on A38, entering Droitwich
- At the next roundabout, take the 2nd exit onto A442 (signposted Kidderminster)
- At the Stonebridge Cross roundabout, take the 1st exit onto Pointon Way (signposted Stonebridge Cross Industrial Estate)
- . The first building on your left is the AKW head office and showroom
- For the Sales & Marketing or the distribution centre continue on Pointon Way. At the 1st roundabout take the 1st left into AKW Liberty House

Terms & conditions

1. DEFINITIONS

- 1.1 The "Company" means AKW Medi-Care Limited.
- 1.2 The "Customer" means any person firm or company purchasing the Goods.
- 1.3 The "Contract" means the contract between the Company and the Custome for the sale and purchase of the Goods. comprising the quotation (if any) made by the Company, the Customer's order for the Goods, the Company's acceptance thereof and these terms and conditions
- 1.4 "Credit Reference Agencies" means Experian Limited and/or any other organisation that maintains and provides information concerning the credit history of any person.
- 1.5 "Data Subjects" means (1) the Customer, (2) where the Customer is a company, the directors of that company, (3) where the Customer is a partnership. the partners of that partnership, (4) where the Customer is a limited liability partnership, the members of that limited liability partnership and (5) where the Customer is a business conducted by an individual, that individual.
- 1.6 The "Goods" means any goods or services agreed in the Contract to be supplied to the Customer by the Company (including any part of parts of them).
- 1.7 "Group Company" means the Company and any holding company of the Company from time to time and any subsidiary from time to time of any such holding company.

2. PREVAILING TERMS & CONDITIONS

- 2.1 The Company is only willing to contract on these terms and conditions and any printed or standard conditions which appear or are referred to on any document emanating from the Customer or any variations from the Company's standard terms and conditions are to have no legal effect unless agreed in writing by a director of the Company.
- 2.2 The Customer acknowledges that it has not relied on any statement, promise or representation made or given by or on behalf of the Company which is not set out in the Contract. Nothing in this condition shall exclude or limit the Company's liability for fraudulent misrepresentation.

3. FORMATION OF CONTRACT

3.1 Any quotation is given on the basis that no Contract will come into existence until the Customer's order is accepted by the Company delivering a written or electronic acknowledgement of order to the Customer. If the Customer's order is not preceded by a quotation from the Company, the Customer's order shall not become binding on the Company until it is accepted by the Company delivering a written or electronic acknowledgement of order to the Customer

4. QUOTATIONS AND PRICING

- 4.1 All prices quoted are exclusive of VAT, which will be added to the price at the prevailing rate. The quoted price may be varied by the Company in accordance with cost variations but will not result in any right by the Customer to cancel the contract. Carriage may be charged extra in accordance with rates as published in current AKW and/or Trays Direct price lists.
- 4.2 The Company reserves the right to alter carriage charges without notice in the event of fuel surcharges being imposed by our carriers. Small consignments may include a small order charge as published in current AKW and/or Trays Direct price lists.

5. DELIVERY

- 5.1 Unless otherwise agreed in writing delivery of the Goods shall take place at the Company's place of business
- 5.2 Any quotation by the Company of a time for delivery is not guaranteed and time for delivery shall not be made of the essence by notice
- 5.3 No liability is accepted for direct, indirect or consequential loss (all three of which terms include, without limitation pure economic loss, loss of profits, loss of business, depletion of goodwill and similar loss), costs, damages, charges or expenses caused directly or indirectly by any delay in the delivery of the Goods (even if caused by the Company's negligence). Nor shall any delay entitle the Customer to terminate or rescind the Contract unless such delay exceeds [180] days.
- 5.4 The quantity of any consignment of Goods as recorded by the Company on despatch from the Company's place of business shall be conclusive evidence of the quantity received by the Customer on delivery unless the Customer can provide conclusive evidence proving the contrary. 5.5 The Company shall not be liable for
- any non-delivery of Goods (even if caused by the Company's negligence) unless the Customer gives written notice to the Company of the non-delivery within 3 days of the date when the Goods would in the ordinary course of events have been
- 5.6 Any liability of the Company for nondelivery of the Goods shall be limited to replacing the Goods within a reasonable time or issuing a credit note at the pro rata Contract rate against any invoice raised for
- 5.7 No claim for damage to the Goods or shortages in the Goods will be considered unless the Company is advised within 3 days of delivery and the Customer also notifies the carrier in the manner and within the appropriate time limit prescribed by the carrier's terms and
- 5.8 If for any reason the Customer fails to accept delivery of any of the Goods when they are ready for delivery, or the Company is unable to deliver the Goods on time because the Customer has not provided appropriate instructions, documents, licences or authorisations:
- (a) risk in the Goods shall pass to the Customer (including for loss or damage caused by the Company's negligence); (b) the Goods shall be deemed to have been delivered; and
- (c) the Company may store the Goods until delivery, whereupon the Customer shall be liable for all related costs and expenses (including, without limitation, storage and

6. PAYMENT TERMS

6.1 Payment terms are strictly 30 days after date of invoice. The Company reserves the right to charge interest at the rate of 4% over Lloyds Bank base rate on all overdue accounts. The due date for payment is of the essence of the contract. The Customer will have no right to set-off statutory or otherwise.

7. PROPERTY AND RISK

- 7.1 The property (both legal and equitable) in the Goods shall not pass to the Customer until:
- (a) the purchase price of the Goods has been paid in full, and
- (h) navment is made to the Company of any sum which is at the date of the

- Contract or may thereafter become due or owing from the Customer to the Company. 7.2 Until property in the Goods has passed to the Customer the Customer will hold the Goods (or their proceeds of resale) in a
- fiduciary capacity. 7.3 Notwithstanding that the ownership remains with the Company until Goods are paid for in full, the Customer shall accept the risk in the Goods on delivery and shall appropriately insure them.
- 7.4 Until property in the Goods has passed to the Customer, the Customer shall keep the Goods separately identifiable and shall not destroy, deface or obscure any identifying mark or packaging on or relating to the Goods
- 7.5 The Customer grants an irrevocable licence to the Company to enter on to the Customer's premises with agents and vehicles if appropriate to recover the
- 7.6 The Customer's right to possession of the Goods shall terminate immediately if: (a) the Customer has a bankruptcy order made against him or makes an arrangement or composition with his creditors, or otherwise takes the benefit of any statutory provision for the time being in force for the relief of insolvent debtors, or (being a body corporate) convenes a meeting of creditors (whether formal or informal), or enters into liquidation (whether voluntary or compulsory) except a solvent voluntary liquidation for the purpose only of reconstruction or amalgamation, or has a receiver and/or manager, administrator or administrative receiver appointed of its undertaking or any part thereof, or documents are filed with the court for the appointment of an administrator of the Customer or notice of intention to appoint an administrator is given by the Customer or its directors or by a qualifying floating charge holder (as defined in paragraph 14 of Schedule B1 to the Insolvency Act 1986), or a resolution is passed or a petition presented to any court for the winding-up of the Custome or for the granting of an administration order in respect of the Customer, or any proceedings are commenced relating to the insolvency or possible insolvency of the Customer: or
- (h) the Customer suffers or allows any execution, whether legal or equitable, to be levied on his/its property or obtained against him/it, or fails to observe or perform any of his/its obligations under the Contract or any other contract between the Company and the Customer, or is unable to pay its debts within the meaning of section 123 of the Insolvency Act 1986 or the Customer ceases to trade: or
- (c) the Customer encumbers or in any way charges any of the Goods.
- 7.7 the Company shall be entitled to recover payment for the Goods notwithstanding that ownership of any of the Goods has not passed from the Company.

8. GUARANTEE AND EXCLUSIONS

8.1 The Company will free of charge within a period of 12 months from date of delivery repair or at its option replace any Goods which are proved to its reasonable satisfaction to have failed to meet its designed specification due to defective material or workmanship, provided that this obligation shall not apply where: (a) the Goods have been improperly installed, installed with a defect without the written authority of the Company. altered in any way or are subject to any unauthorised repair or misuse, or

(b) the Customer has failed to provide documentary notification and proof of a defect or suspected defect or returned the goods for inspection within 14 days of the same coming to the knowledge of the Customer, or

(c) the Customer is in breach of this or any

other contract with the Company 8.2 SAVE AS PROVIDED IN THE PRECEDING PARAGRAPH IN NO CIRCUMSTANCES WILL THE COMPANY OR ITS EMPLOYEES, AGENTS OR SUB-CONTRACTORS BE LIABLE FOR ANY LOSS OR DAMAGE OF ANY KIND CONSEQUENTIAL OR OTHERWISE (OTHER THAN DEATH OR PERSONAL INJURY RESULTING FROM THE COMPANY'S NEGLIGENCE) WHETHER UNDER THE CONTRACT OR NOT, OR CAUSED DIRECTLY OR INDIRECTLY BY ANY NEGLIGENCE OR OTHER TORTIOUS ACT OR BREACH OF STATUTORY DUTY ON THE PART OF THE COMPANY OR ON THE PART OF ANY OF ITS EMPLOYEES. AGENTS OR SUB-CONTRACTORS IN CONNECTION WITH OR ARISING OUT OF THE MANUFACTURE OR SUPPLY OF THE GOODS OR IN CONNECTION WITH ANY STATEMENT GIVEN OR MADE (OR ADVICE NOT GIVEN OR MADE) BY OR ON BEHALF OF THE COMPANY THE COMPANY HEREBY EXCLUDES ALL CONDITIONS, WARRANTIES AND STIPULATIONS EXPRESS OR IMPLIED, STATUTORY, CUSTOMARY OR OTHERWISE WHICH BUT FOR SUCH **EXCLUSION WOULD OR MIGHT SUBSIST** IN FAVOUR OF THE CUSTOMER.

9. RETURNS

9.1 the Company disclaims liability for goods returned without the written authority of the Company. Any goods approved for return must be advised in writing quoting the Company's invoice number and returns number. The Company disclaims any risk or liability for any returns whilst in transit to the Company. If for any reason you are unhappy with your goods please notify AKW MediCare within 28 days for showering goods and 3 days for Kitchen products. Please also remember to check goods ensuring you are happy with them before signing.

10. RIGHT TO SUB-CONTRACT OR

- 10.1 The Company shall be entitled to subcontract or assign any part of the Contract to any person, firm or Company. 10.2 The Customer shall not be entitled to assign the Contract or any part of it without the prior written consent of the
- 11. FORCE MAJEURE
- If the Company is prevented or hindered from making delivery of any Goods or completion of any work by reason of acts of God, civil disturbance, industrial action (including labour disputes involving the work force or any part of the work force of the Company), government action or any other cause whatever beyond the Company's control, the Company may give notice to the Customer either: (a) cancelling the Company's outstanding obligations under the Contract, or (b) extending the time for delivery or completion by a period not exceeding four months



