

Product Overview: The AKW M20 Digital Waste Pump provides reliability, high performance in operation, is easy to install and is compatible with AKW's wide range of pumped wastes and trays. This pump replaces the M2 pump in the current range.

- Features:**
- 20lpm in a 'real life' scenario
 - Excellent pump performance
 - IP 45 Rating
 - Installs directly into the Luda[®] shower

- Benefits:**
- Quick and easy fitting
 - Easily serviceable
 - Efficient debris clearing
 - Virtually silent in operation

Guarantee & Certification



- BS EN 61558-1, BS EN 61558-2-6,
- BS EN 60335-1, BS EN 60335-2-41,
- BS EN 60529
- BS KM 507429
- EMC Directive 89/336/EEC
- Low Voltage Directive 73/23/EEC




Product Specification

- Pump head uses 4 valves for good debris clearing, improved flap valve and bowl design
- Superior pump performance
- 22mm Inlet and outlet connectors
- Uses AKW flow meter
- Increased accuracy when matched to shower flow rates
- Pump head can be rotated to allow flow in either direction
- 20lpm Maximum capacity (tested in a 'real world' scenario)
- Rated at IP45 and suitable to be installed in Zone 1 or Zone 2 of a shower room
- Maximum Outlet Head: 1.0m (39in)
- Maximum Inlet Lift: 0.5m (19in)
- MAX COMBINED HEAD + LIFT: 1.5m (59in)
- SUPPLY: 230V AC 50Hz 73W
- T5A fused internally
- DUTY CYCLE: 30 minutes max on 50% duty
- Flow Meter Input: Gems FT110 1000 pulses/litre/min
- For use with compatible electric or mixer showers
- Non-handed, selectable inlet / outlet direction

* For further terms and conditions regarding the AKW 5 year warranty on AKW electrical products please refer to AKW catalogue

Dimensions

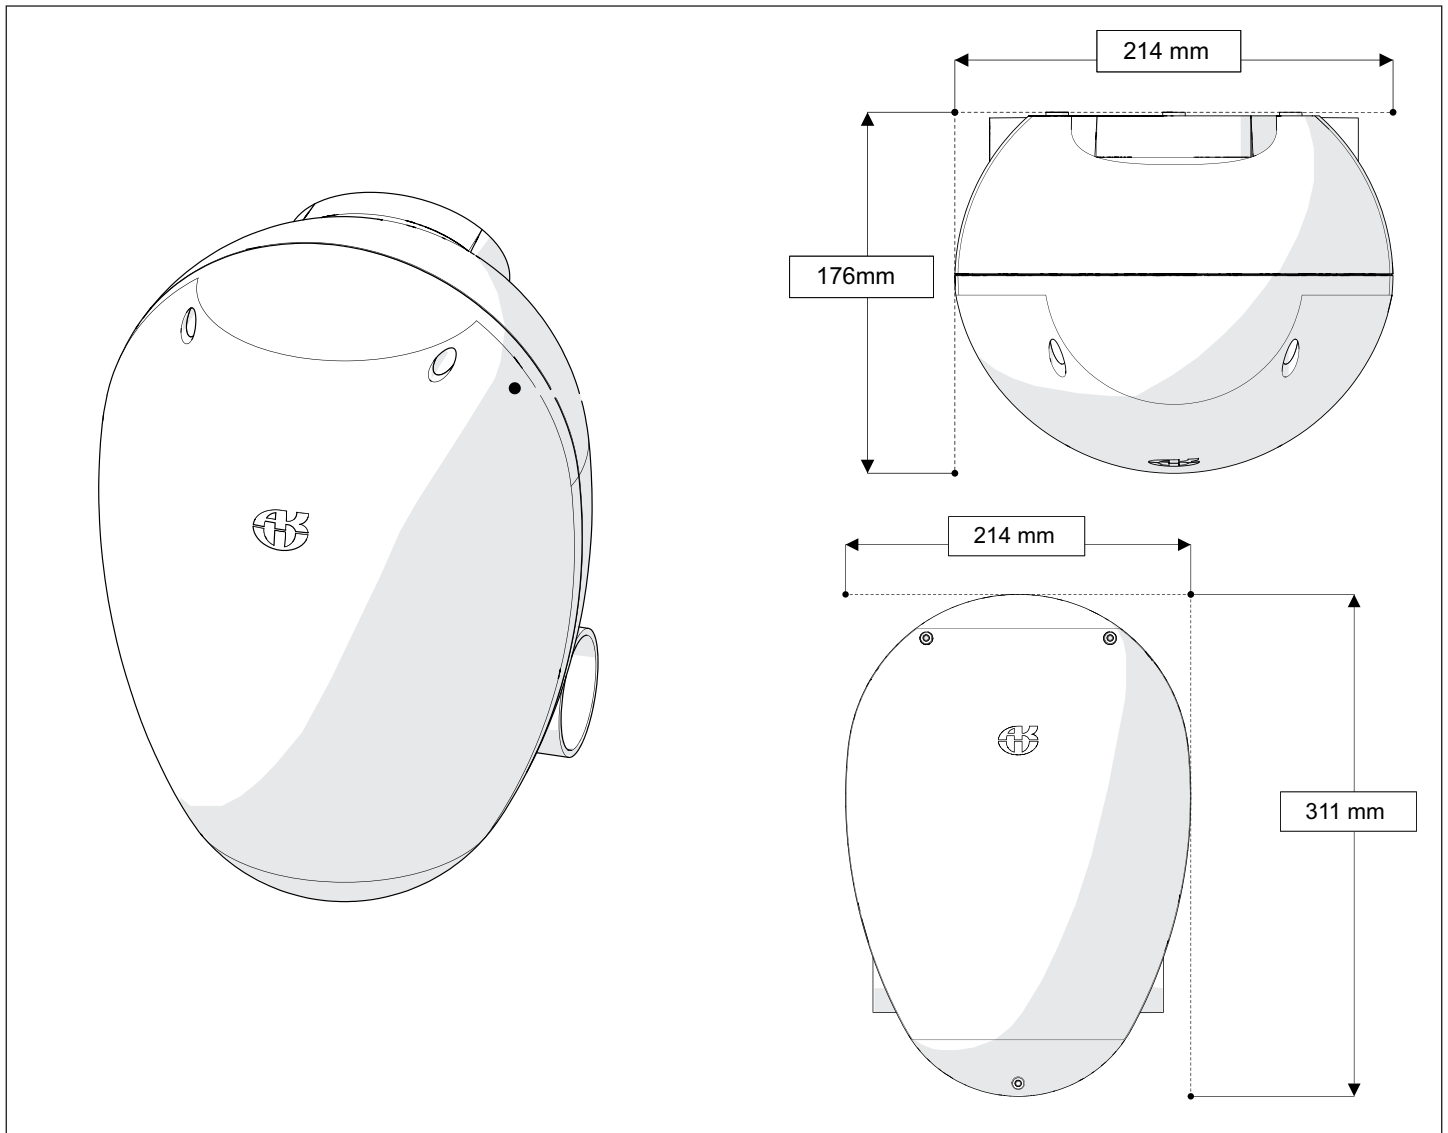

Product codes

Part No	Description
25481	Digipump M20 with Upward Discharge Waste
25482	Digipump M20 with Standard 50mm Diameter Chrome Waste
25483	Digipump M20 with 90mm Diameter Chrome Waste
25484	Digipump M20 with Tuff Form Pumped Waste (PGTF)
25485	Digipump M20 with Screedmaster Waste
25486	Digipump M20 with Silentflow+ Waste (PGTF)