

TECHNICAL DATA SHEET

PRISM

Recessed Thermostatic Dual Control Shower Valve with Integral Two Outlet Diverter


Product Specification

Product Code:	PM2 SHCDIV C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of brass construction
Cartridge Type:	Ceramic disc valve
Supply:	Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
Inlet Connections:	15mm Compression connections
Working Pressures:	Min 0.2 Bar, Max 5.0 Bar



Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 8 l/min
- Fully serviceable from the front

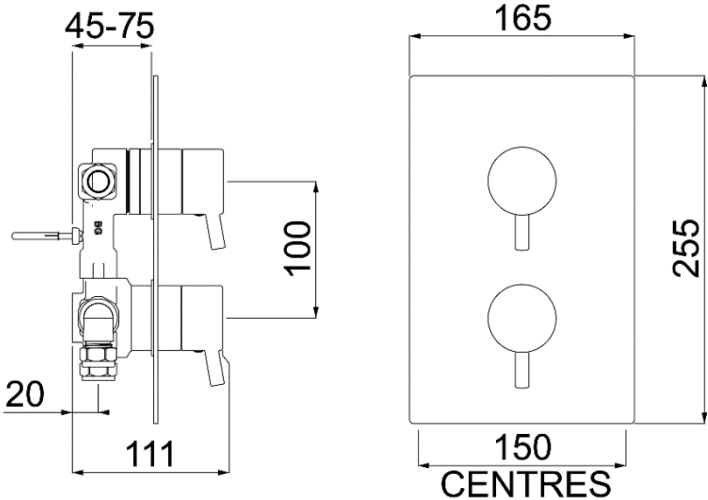

Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Outlet 1	8.73	13.8	19.52	27.6	33.8	43.64
Outlet 2	8.54	13.5	19.09	27	33.07	42.69

Compliance / Approvals

WRAS Approval No: 1507042

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com

Guarantee: 5 years covering manufacturing faults.

