RSP EFSNK C TO

RASPBERRY Tap Range Raspberry Easyfit Monobloc Sink Mixer Chrome Tap Only



_							s:
_	$^{\circ}$	\mathbf{a}	т	11	\boldsymbol{r}	\frown	С.
	ᆫ	a	u	u		C	Э.

- Long life ceramic cartridge for added durability and ease of use
- Metal fixing nut for added durability
- Product supplied without Easyfit base
- Minimum working pressure of 0.3 bar


Product Certifications:



For more products, visit our website: http://www.bristan.com



Specification						
Product Type:	Kitchen Taps					
Main Construction Material:	Brass					
Mount Type:	Deck Mounted					
Handle Type:	Lever					
Connection Inlet:	1/2" BSP Flexible Tails					
Connection Outlet:						
Number of Tap Holes:	1					
Valve/Cartridge Type:	35mm Cartridge					
Plumbing System Requirements:	All, Preferably Balanced					
Working Pressure Range:	Min 0.3 Bar, Max 5.0 Bar					
Maximum Hot Water Temperature: °C	65					
Maximum Static Pressure: (bar)	10					
Flow Type:	Single: Single Flow /Dual:					
Isolation Included:	Yes					

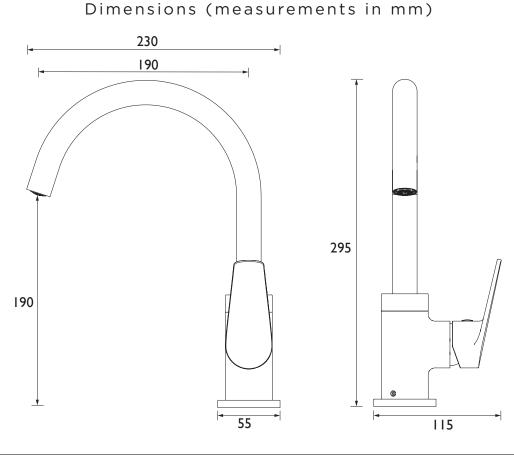

Flow Rates (I/min)									
System Pressure (bar)	0.2	0.5	1	2	3	5			
RSP EFSNK C TO	8.1	10.4	14.7	20.9	25.5	32.9			

TECHNICAL DATA SHEET



