CLR WMBF WHT

CLARET Tap Range Claret Wall Mounted Bath Filler White & Chrome



_							s:
_	$^{\circ}$	\mathbf{a}	т	11	\boldsymbol{r}	\frown	С.
	ᆫ	a	u	u		C	Э.

- Long life ceramic cartridge for added durability and ease of use
- Easy to use metal handle
- Minimum working pressure of 0.3 bar

Product Certifications:




For more products, visit our website: http://www.bristan.com



Specification						
Product Type:	Bathroom Taps					
Main Construction Material:	Brass					
Mount Type:	Wall Mounted					
Handle Type:	Single Lever					
Connection Inlet:	1/2" BSP 15mm Compression					
Connection Outlet:	M24 Coin Slot Anti-Splash					
Number of Tap Holes:	3					
Valve/Cartridge Type:	45mm Cartridge					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure:	0.3 Bar					
Maximum Dynamic Pressure:	5.0 Bar					
Maximum Hot Water Temperature: °C	65					
Maximum Static Pressure: (bar)	10					
Flow Type:	Single Flow					
Isolation Included:	No					

Dimensions (measurements in mm)

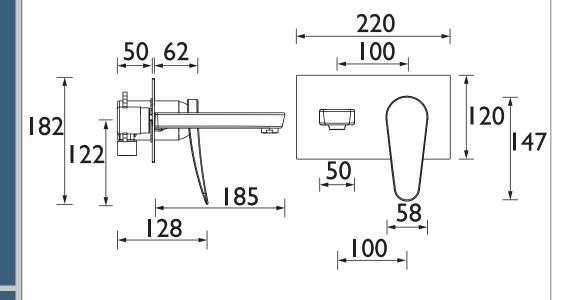

Flow Rates (I/min)										
System Pressure (bar)	0.3	0.5	1	2	3	5				
CLR WMBF C	13.9	18	26.2	31.4	35	38.3				

TECHNICAL DATA SHEET



BRISTAN