CLR SHXMTFF C

CLARET Shower Range Claret Thermostatic Exposed Bar Valve with Adjustable Riser and Multi Function Handset Chrome



Specification				
Style:	Contemporary			
Finish/Colour:	Chrome			
Main Construction Material:	Brass			
No of Controls:	2			
Shower Type:	Exposed Bar			
Shower Head Type:	Both			
Valve/Cartridge Type:	Thermostatic			
Maximum Hot Water Supply Temperature	80			
Dynamic Pressure Range: (bar)	5			
Maximum Static Pressure: (bar)	10			
Plumbing System Suitability:	All, Preferably Balanced			
Working Pressure Range:	Min. 0.5, Max. 5.0			
Flow Rate: (I/min @ 3 bar)	11			
Connection Inlet:	15mm Compression			
Connection Outlet:	G 1/2"			
Isolation Valve Included:	No			
Check Valve Included:	No			


Features:

- Supplied with our Wallmount 12
 Fixing Kit
- Shower has an adjustable fixing bracket on riser rail
- Exisitng screwholes can be used
- Easy installation
- Supplied with a push-button multi-mode rub clean handset

Product Certifications:



Dimensions (measurements in mm)

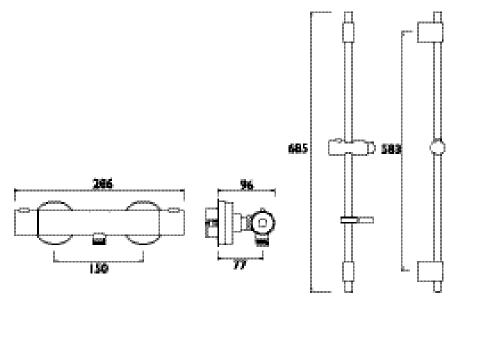

For more products, visit our website: <u>http://www.bristan.com</u>

■廃■
松銀

Flow Rates (I/min)								
System Pressure (bar)	0.5	1	2	3	4	5		
Through Handset (mixed)	3.5	5.2	7.4	8.9	10.2	11.4		





Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.