VRT BASNW C

VERTICO Tap Range Vertico Basin Mixer without Waste Chrome



| | | res: |
|---|--------|--------|
| _ | \sim | raci |
| | -c | 11 – 5 |
| | | |

- Long life ceramic cartridge for added durability and ease of use
- Metal fixing nut for added durability
- Flexible tails included

Product Certifications:





For more products, visit our website: http://www.bristan.com



| Specification | | | | | | |
|-----------------------------------|-----------------------------------|--|--|--|--|--|
| Product Type: | Bathroom Taps | | | | | |
| Main Construction Material: | Brass | | | | | |
| Mount Type: | Deck Mounted | | | | | |
| Handle Type: | Lever Handle | | | | | |
| Connection Inlet: | 1/2" BSP Female | | | | | |
| Connection Outlet: | M24 5lpm Flow Limiter | | | | | |
| Number of Tap Holes: | 1 | | | | | |
| Valve/Cartridge Type: | 35mm Cartridge | | | | | |
| Plumbing System Requirements: | Suitable for all plumbing systems | | | | | |
| Minimum Dynamic Pressure: | 0.2 Bar | | | | | |
| Maximum Dynamic Pressure: | 5.0 Bar | | | | | |
| Maximum Hot Water Temperature: °C | 65 | | | | | |
| Maximum Static Pressure: (bar) | 10 | | | | | |
| Flow Type: | Single Flow | | | | | |
| Isolation Included: | No | | | | | |
| | | | | | | |

Dimensions (measurements in mm)



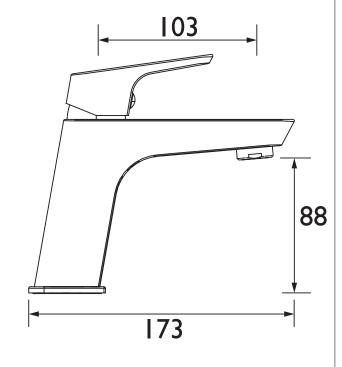

| Flow Rates (I/min) | | | | | | | | | |
|-----------------------|-----|-----|---|---|---|---|--|--|--|
| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 | | | |
| VRT BASNW C | 4.9 | 5 | 5 | 5 | 5 | 5 | | | |

TECHNICAL DATA SHEET



BRISTAN