CLI BSM C

CLIO Tap Range Clio Bath Shower Mixer Chrome



	L	
$-\alpha$	тии	יסכי
Fea [°]	uш	CO.

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose, handset and wall bracket

Product Certifications:




15.7 l/min

For more products, visit our website: http://www.bristan.com



Specification				
Product Type:	Bathroom Tap			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever Handles			
Connection Inlet:	G3/4"			
Connection Outlet:	M28 Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	No			

Dimensions (measurements in mm)

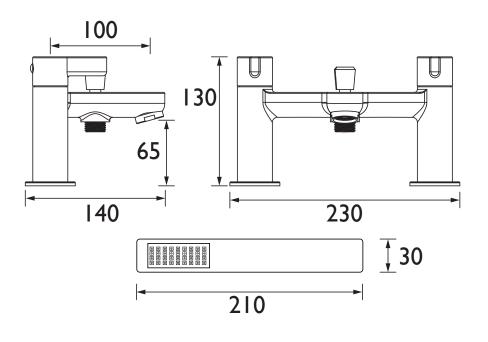

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Through Bath Filler (mixed)	23.5	37.2	52.6	74.4	91.1	117.6		
Through Handset (mixed)	4.1	6.4	9.1	12.8	15.7	20.3		

TECHNICAL DATA SHEET



