FRZ BSM C

FRENZY Tap Range Frenzy Bath Shower Mixer Chrome



ᆮ	\sim	_	ŧ٠	ı.	r	$\overline{}$	s:
_	c	а	ш	vi	ш	=	Э.

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose, rub-clean anti-limescale handset and wall bracket
- Chrome plated to BS EN 248

Product Certifications:



WRAS Certificate No: 2003042 WRAS Expiry Date: 31/03/2025






For more products, visit our website: http://www.bristan.com



Specification						
Product Type:	Bathroom Tap					
Main Construction Material:	Brass					
Mount Type:	Deck Mounted					
Handle Type:	Lever Handles					
Connection Inlet:	G3/4"					
Connection Outlet:	M28 Flow Straightener					
Number of Tap Holes:	2					
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.3 bar					
Maximum Dynamic Pressure (bar):	5.0 bar					
Maximum Hot Water Temperature °C:	65°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single Flow					
Isolation Included:	No					

Dimensions (measurements in mm)

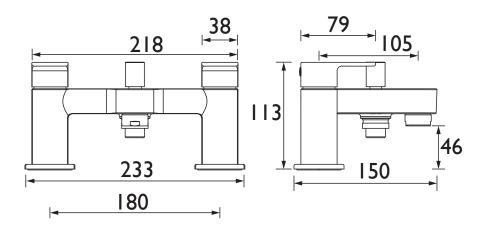

Flow Rates (I/min)											
System Pressure (bar)	0.3	0.5	1	2	3	5					
Through Bath Filler (mixed)	11.2	14.5	20.4	28.9	35.4	45.7					
Through Handset (mixed)	4.9	6.3	8.9	12.6	15.4	19.9					

TECHNICAL DATA SHEET



