VT2 1/2 C

VANTAGE Tap Range Vantage 2 Basin Taps Chrome



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	1/2" BSP			
Connection Outlet:	M24 Aerator			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/2" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Isolation Included:	No			

Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Complete with flexi tails and integral isolators

Product Certifications:



WRAS Certificate No: 2003904 WRAS Expiry Date: 31/03/2025




♦55.8 l/min

For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

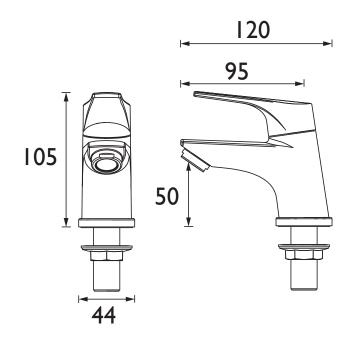

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
VT2 1/2 C (Cold)	7.2	11.4	16.1	22.8	27.9	36		
VT2 1/2 C (Hot)	7.2	11.4	16.1	22.8	27.9	36		

TECHNICAL DATA SHEET



