HOU ES BAS C

HOURGLASS Tap Range Hourglass Eco Start Basin Mixer Chrome



			res	
_	\sim \sim	TII	$r \cap c$	
	Ca	uч		٠.

- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily fired up.
- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Everything you need in the box including flexible tails and clicker/pop-up waste so nothing to buy separately.
- Long life ceramic cartridge for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.

Product Certifications:




WRAS Certificate No: 2312911 WRAS Expiry Date: 31/12/2028





Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Lever Handle				
Connection Inlet:	1/2" BSP Flexible Tails				
Connection Outlet:	M24 5lpm Flow Limiter				
Number of Tap Holes:	1				
Valve/Cartridge Type:	35mm Eco-Start Cartridge				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.5 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				

Dimensions (measurements in mm)

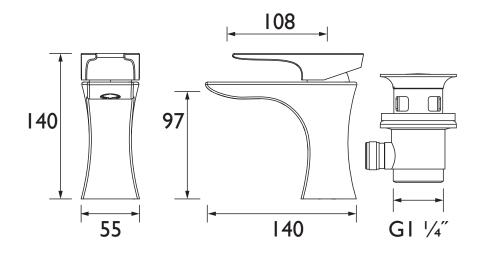

Flow Rates (I/min)										
System Pressure (bar)	0.5	0.5	1	2	3	5				
HOU ES BAS C (mixed)	5	5	5	5	5	5				

TECHNICAL DATA SHEET





For more products, visit our website: http://www.bristan.com



Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.