PO BAS C

POLO Tap Range Polo Basin Mixer with Clicker Waste



_							s:	
_	$^{\circ}$	\mathbf{a}	т	11	\boldsymbol{r}	\frown	С.	
	ᆫ	a	u	u		C	Э.	
							_	

- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Long life ceramic cartridge for added durability and smooth control.
- Everything you need in the box including flexible tails and clicker waste so nothing to buy separately.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10-year parts and 1 year labour guarantee for peace of mind.

Product Certifications:



WRAS Certificate No: 2306905 WRAS Expiry Date: 30/06/2028






For more products, visit our website: http://www.bristan.com



Specification						
Product Type:	Bathroom Taps					
Main Construction Material:	Brass					
Mount Type:	Deck					
Handle Type:	Lever Handle					
Connection Inlet:	1/2" BSP Flexible Tails					
Connection Outlet:	5lpm Coin Slot Aerator					
Number of Tap Holes:	1					
Valve/Cartridge Type:	35mm Single Lever Cartridge					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.5 bar					
Maximum Dynamic Pressure (bar):	5 bar					
Maximum Hot Water Temperature °C:	60°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single					
Isolation Included:	N					

Dimensions (measurements in mm)

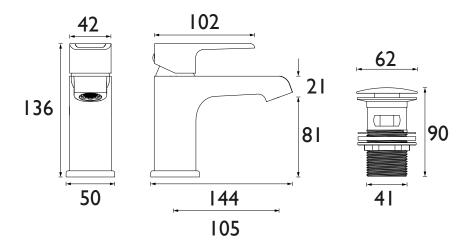

Flow Rates (I/min)										
System Pressure (bar)	0.5	1	2	3	5					
PO BAS C (mixed)	3.1	4.1	4.6	4.5	4.6					

TECHNICAL DATA SHEET



