BTZ BSM C

BLITZ Tap Range Blitz Bath Shower Mixer Chrome



_							s:	
_	$^{\circ}$	\mathbf{a}	т	11	\boldsymbol{r}	\frown	С.	
	ᆫ	a	u	u		C	Э.	
							_	

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- 3/4" valve

Specification								
Product Type:	Bathroom Tap							
Main Construction Material:	Brass							
Mount Type:	Deck Mounted							
Handle Type:	Lever Hanlde							
Connection Inlet:	3/4" BSP							
Connection Outlet:	M24 Flow Straightener							
Number of Tap Holes:	2							
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve							
Plumbing System Requirements:	Suitable for all plumbing systems							
Minimum Dynamic Pressure (bar):	0.2 bar							
Maximum Dynamic Pressure (bar):	5.0 bar							
Maximum Hot Water Temperature °C:	65°C							
Maximum Static Pressure (bar):	10 bar							
Flow Type:	Single Flow							
Isolation Included:	No							

Product Certifications:



WRAS Cert. Number: 2203031 WRAS Expiry Date: 31/03/2027






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

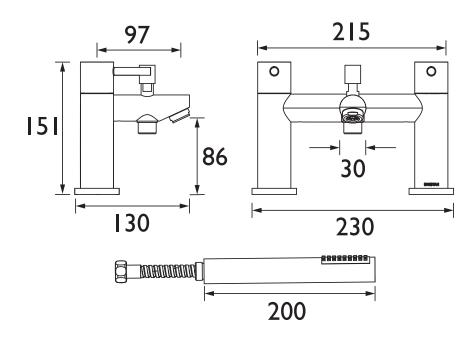

Flow Rates (I/min)										
System Pressure (bar)	0.2	0.5	1	2	3	5				
Through Bath Filler (mixed)	24	38	53.8	76	93.1	120.2				
Through Handset (mixed)	3.7	5.9	8.3	11.8	14.4	18.6				

TECHNICAL DATA SHEET



