

PM2 SHC3DIV C

PRISM Shower Range Prism Recessed Thermostatic Dual Control Shower Valve with Integral Two Outlet Diverter and Stopcock Chrome



Features:


- 15mm inlet connections
- Easy installation with an adjustable faceplate that fits total wall depths from 50mm to 75mm for a perfect flush finish
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C
- Fully serviceable from the front

Product Certifications:



WRAS Certificate No: 2005900
WRAS Expiry Date: 31/05/2025


For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	00 Chrome Plated
Main Construction Material:	Brass
No of Controls:	3
Shower Type:	Dual Control
Shower Head Type:	None
Shower Kit:	N/A
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valve
Maximum Hot Water Supply Temperature °C:	65
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	15mm Compression
Isolation Valve Included:	N
Check Valve Included:	Y

Dimensions (measurements in mm)

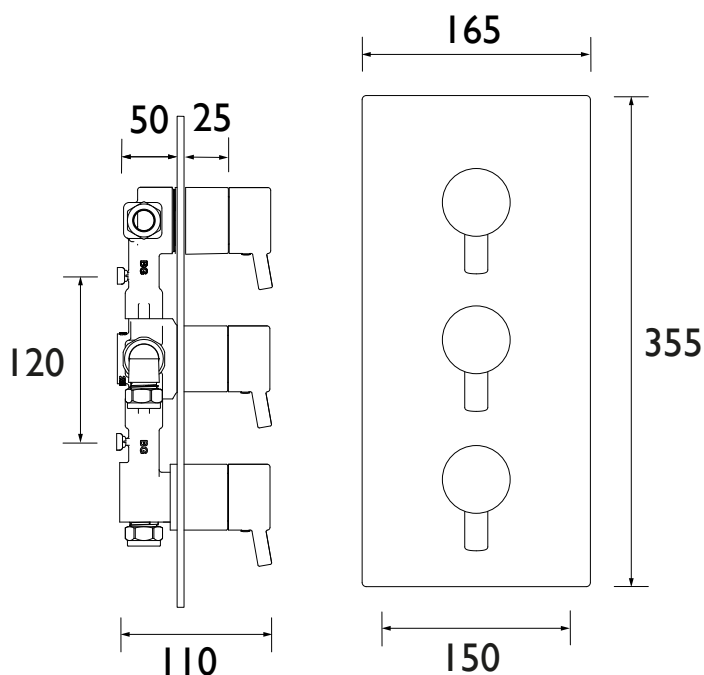

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	8.3	14.5	21.2	30	36.7	47.4

TECHNICAL
DATA
SHEET



BRISTAN

D6