

AR2 THBF C

ARTISAN Tap Range Artisan Thermostatic Bath Filler Chrome



Specification

Product Type:	Bathroom Taps
Main Construction Material:	Brass; ABS; Stainless Steel
Mount Type:	Deck
Handle Type:	Round
Connection Inlet:	3/4" BSP
Connection Outlet:	M24 Flow Straightener
Number of Tap Holes:	2
Valve/Cartridge Type:	1/2" Ceramic Disc Valve - 1/4 turn
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.5 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Features:

- Prioritises family safety with thermostatic control that maintains your pre-set maximum temperature of 38°C
- Override temperature limits when needed with the convenient safety override feature
- Control your experience with dual controls for separate flow and temperature adjustment
- Easily fit, maintain or replace with the WMNT 10 Fast Fixing Kit
- Install with confidence using a robust metal fixing nut that keeps your tap securely in place

Product Certifications:




WRAS Certificate No: 250103002
WRAS Expiry Date: 31/01/2030

For more products, visit our website:
<http://www.bristan.com>



Dimensions (measurements in mm)

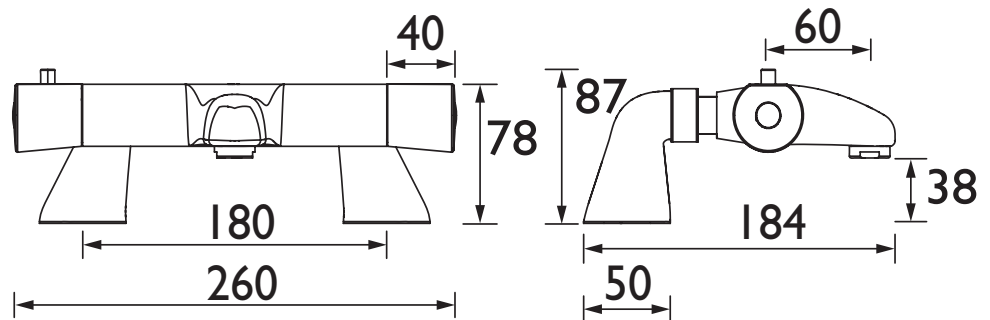

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
AR2 THBF C (mixed)	19.4	27.4	38.8	47.5	61.3

TECHNICAL DATA SHEET



BRISTAN

D8