

CR SHXDIVFF C

CARRE Shower Range

Carre Exposed Fixed Head Bar Shower with Diverter & Kit



Features:

- The versatile Carre Mixer Shower in chrome combines adjustable height rigid riser with sleek shower heads, designed to complement almost any bathroom. Thermostatic control with 38°C safety stop protection ensures secure showering while the rub-clean heads maintain peak performance.
- Fast, hassle-free installation with built-in front facing isolation valves that make it easy to fit, maintain and replace.
- Shower safely with automatic shut-off protection if hot or cold water supply fails
- Easily adjust the height with a telescopic riser designed to fit your space, ideal for wet rooms, walk-in showers, or over-bath installations
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 2303902
WRAS Expiry Date: 31/03/2028



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Bar Shower
Shower Head Type:	Both
Shower Kit:	Adjustable riser with Fixed Head
Valve/Cartridge Type:	Thermostatic Cartridge & Two-Way Diverter
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.5
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm Compression
Connection Outlet:	G1/2" and Riser Pipe
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

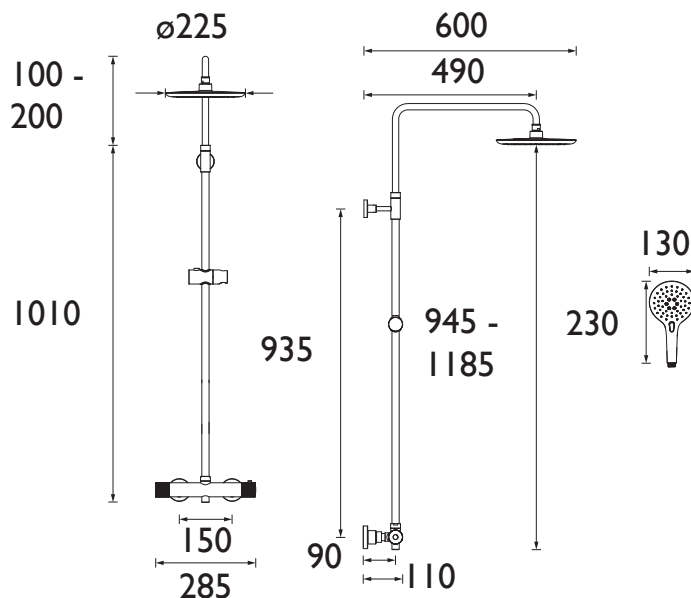

Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
Through Handset (mixed)	3.7	5.1	7.4	9.1	11.8
Through Fixed Head (mixed)	5.3	8.2	12.1	15.1	19.6

TECHNICAL DATA SHEET



BRISTAN

D20

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - Lifetime guarantee applies to products purchased on or after 01/04/2026. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Listed flow rates are indicative for the product. Different plumbing systems and flow regulators can produce higher or lower results. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.