

AR2 SHXVOFF C

ARTISAN Shower Range Artisan Thermostatic Surface Mounted Bar Shower Valve & Fast Fit Connections



Features:

- The Artisan chrome bar mixer shower delivers sleek, contemporary design with integrated safety features. Thermostatic temperature control prevents scalding, while the Eco Button reduces water flow without compromising your shower experience.
- Enjoy peace of mind with a 38°C safety stop, including override when required
- Reduce water consumption naturally with the integrated eco button that can be overridden when needed
- Fast, hassle-free installation with built-in front facing isolation valves that make it easy to fit, maintain and replace.
- Built to last, backed by a lifetime parts and 1-year labour guarantee

Product Certifications:




WRAS Certificate No: 250603003
WRAS Expiry Date: 30/06/2030

TMV2 Certificate No: 2601731
TMV2 Designation: HP-S, LP-SE
TMV2 Expiry Date: 26/01/2031

Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Zinc; ABS; Stainless Steel
No of Controls:	2
Shower Type:	Bar Shower
Valve/Cartridge Type:	Thermostatic Cartridge & 3/4" Ceramic Disc Valve - 1/4 turn
Maximum Hot Water Supply Temperature °C:	60
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced
Minimum Dynamic Pressure (bar):	0.2
Maximum Dynamic Pressure (bar):	5
Maximum Static Pressure (bar):	10
Connection Inlet:	15mm compression
Connection Outlet:	G1/2"
Isolation Valve Included:	Yes
Check Valve Included:	Yes

Dimensions (measurements in mm)

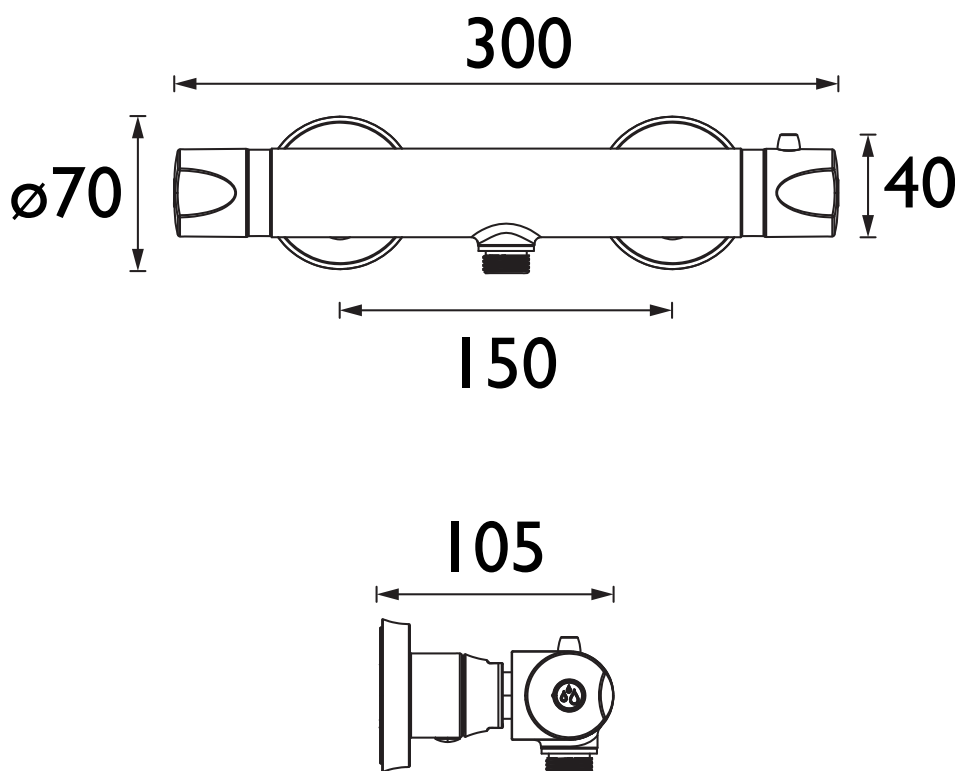

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Valve Only/Largest FR (mixed)	4.2	7.3	10.9	15.7	19.2	24.5

TECHNICAL
DATA
SHEET



BRISTAN

D17