MILA Tap Range Mila Basin Pillar Taps Black


D2

MI 1/2 BLK



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Round			
Connection Inlet:	1/2" BSP			
Connection Outlet:	M16 Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/2" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Isolation Included:	No			

Dimensions (measurements in mm)

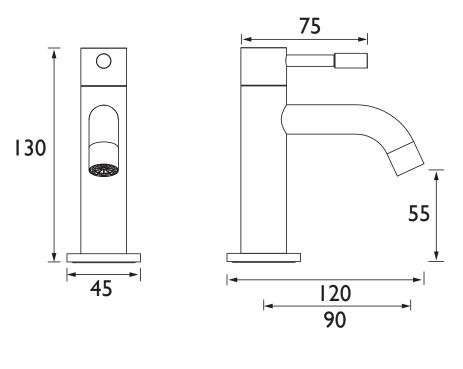

	Flow R	Flow Rates (l/min)						
医感觉的	System Pressure (bar)	0.2	0.5	1	2	3	5	
	MI 1/2 BLK (Cold)	9.6	14.8	21	29.9	36.3	47	
	MI 1/2 BLK (Hot)	9.8	15.2	21.8	31	38.1	49	
TECHNICAL DATA SHEET	P QUALIA S S S S S S S S S S S S S S S S S S S		B	RIS	ST/	AN		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

Features:

- You really can count on Bristan taps as they are designed, engineered and tested to last with our precise glide and secure fix components plus a modern black finish, all under a 10 Year guarantee for peace of mind
- A black finish that will make a statement in any bathroom
- Long life and easy to use 1/4 turn ceramic disc valves
- Supplied with metal fixing nuts for added durability and to secure your tap in place
- Easy-to-use lever handles

Product Certifications:

WRAS Certificate No: 2204907 WRAS Expiry Date: 30/04/2027