


**Geberit WC flush control with electronic flush actuation, battery operation, for Sigma concealed cistern 12 cm, dual flush, with Sigma10 actuator plate, automatic / touchless, screwable**

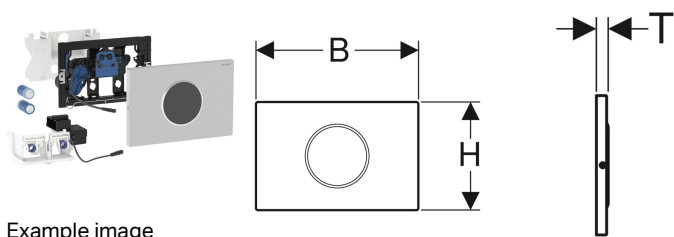

Example image

**Application purposes**

- For public and semipublic areas
- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Suitable for less-abled installation

**Characteristics**

- Touchless manual flush actuation
- Automatic flush actuation
- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Flush actuation possible via external push-button
- Screwable flush plate
- Battery-operated
- Batteries in closed battery compartment in the flushing cistern
- With push-fit connection with cross-polarity protection
- Infrared user detection with background fade-out
- Self-adjusting IR sensor
- Reliable IR distance detection
- Interval flush preset
- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set

- Device settings and operation with mobile device via integrated Bluetooth® interface
- Compatible with Geberit Control App
- Wirelessly connectable with Geberit Gateway via Bluetooth®
- Compatible with Geberit Connect
- Compatible with Geberit Service Handy
- Flush actuation can be deactivated
- Low-noise lifting mechanism
- Electrical lifting device, self-calibrating
- Vandal-resistant
- Easy maintenance and cleaning

**Technical data**

Battery type	LR20
Protection degree	IP45
Operating voltage	3 V DC
Power consumption standby	0.15 W
Interval flush, adjustment range min.	1–168 h
Interval flush, factory setting	24 h
Interval flush time, adjustment range	1–200 s
Interval flush time, factory setting	5 s
Detection time, adjustment range	1–60 s
Detection time, factory setting	7 s

**Scope of delivery**

- Sigma10 flush plate
- Mounting frame with infrared control and battery compartment, premounted
- Protection plate
- Support block with servomotor and lifting device, premounted
- 2 alkaline manganese batteries LR20, each 1.5 V
- Fastening material

Art. no.	Colour / surface	Material designation	B	H	T	Power consumption
115.909.SN.6	Plate: brushed, easy-to-clean- coated Design ring: polished	Stainless steel	24.6 cm	16.4 cm	1.5 cm	≤ 4 W
115.909.16.6	Plate: black matt-coated, easy-to-clean- coated Design ring: black	Stainless steel	24.6 cm	16.4 cm	1.5 cm	≤ 4 W
115.909.DW.6	Plate: black Design ring: matt black	Stainless steel	24.6 cm	16.4 cm	1.5 cm	≤ 4 W

**Accessories**

- Geberit Service Handy