

DA177 Thermo Conc Shower Valve SQ Handle 1 way

Barcode ,7081241514207

Product Code DA177

ConstructionBrass Body (CuZn38b18)FinishesChrome plated to BS EN 248

Product Type Contemporary

Water Pressure Min.1.0 bar, Max. 7.0 bar

Plumbing Systems Suitable for all plumbing systems, preferably balanced.Min. supply pressure

differential requirement is 5:1

Standards Complies with BSEN 1111

Certification Manufactured to comply with TMV2


Cartridge Thermostatic

Fitting

Packaging 23 x 17 x 16.5cm / carton (222 carton/pallet 1.2m/1.0m/1.6m)


Guarantee 10 years (3 year on working parts/decorative finish)

Additional Information 1.Temperature: Pre-set 38°C, with push button override to 48°C.







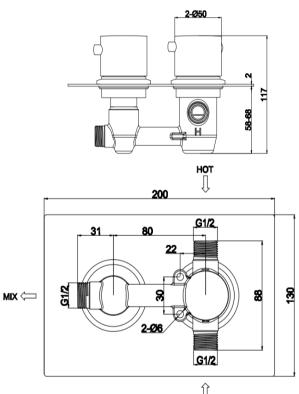

COLD

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
DA177	2. 1	4. 3		7. 4	11.7		14. 4	18.9	-	-

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.