


SAGITTARIUS

TAPS & SHOWERING

CONTRACT SEQUENTIAL BASIN MIXER CHROME CO/206/C

Construction	Body is brass and conforms to BS EN 200 & BS EN 817 Complies with BS5412 DDA compliant
Finish	Chrome
Water Pressure System Req	Recommended Min 0.2– Max 8 Bar Pressure Suitable for all plumbing systems 0.2 bar and over ideally balance
Additional Info	Ceramic Disc Technology, Sequential lever Control. Safety feature, anti scold device. The maximum temp can be controlled by repositioning a plastic collar under the lever. Supplies with metal lever

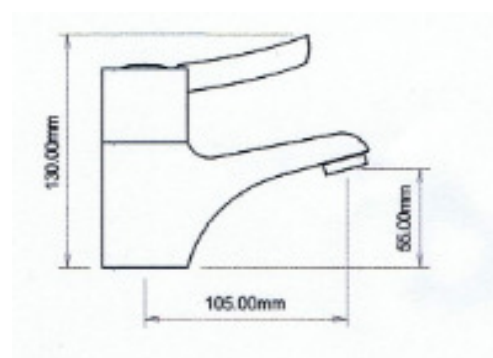

Flow Rates (Litres per minute)

System Pressure	0.2 Bar	0.5 Bar	1 Bar	2 Bar	3 Bar	5 Bar
CO/206/C	6.6	11.1	15.8	22.6	27.4	35.5

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances.

FOR FURTHER ADVICE PLEASE CONTACT :-
SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029
EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK