


# Technical Data Sheet

## Stainless Vented Indirect

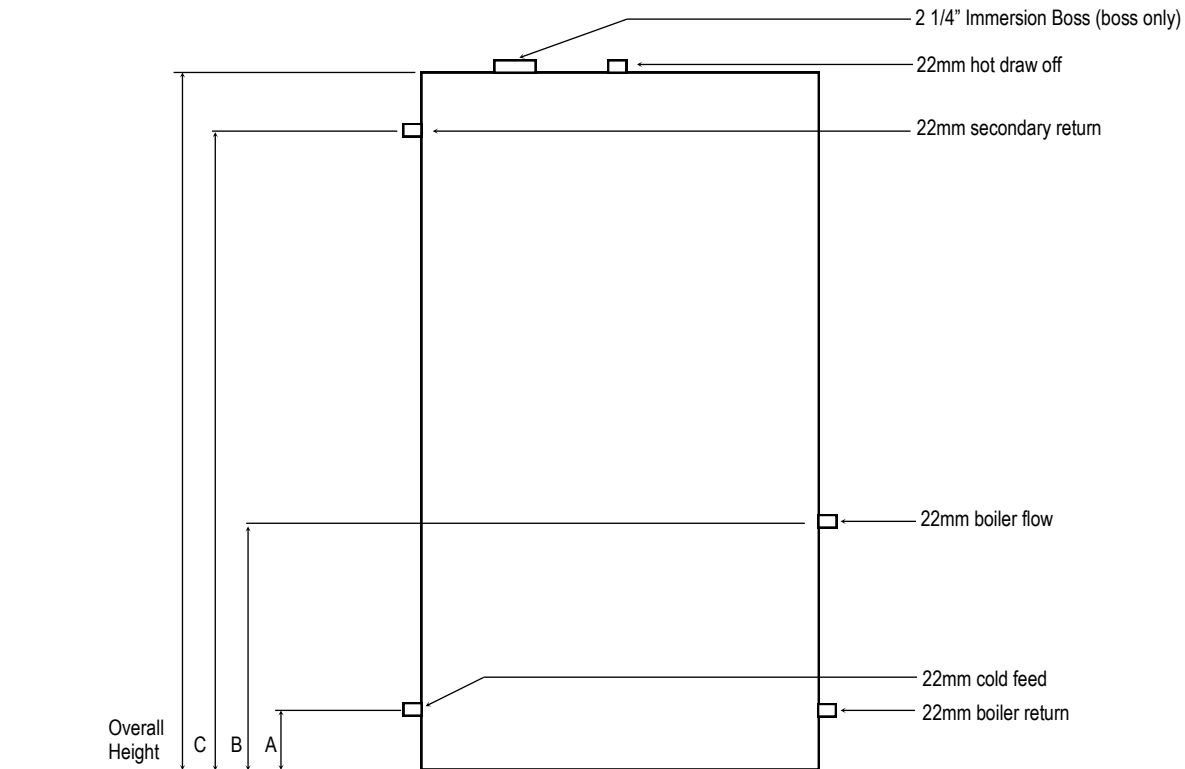

22mm nuts & olives included, no immersion heater. Dimensions are subject to change without any prior notice.

Product Code	VSI09040VF	VSI09045VF	VSI10540VF	VSI10545VF	VSI12040VF	VSI12045VF	VSI15040VF	VSI15045VF	VSI18045VF
Nominal Capacity (L)	96	117	114	140	141	162	164	206	247
Height (mm)	900	900	1050	1050	1200	1200	1500	1500	1800
Diameter (mm)	400	450	400	450	400	450	400	450	450
A (mm)	100	100	100	100	100	100	100	100	100
B (mm)	425	425	425	530	530	530	530	530	530
C (mm)	813	810	963	960	1113	1113	1410	1410	1708
Empty Weight (kg)	17	19	18	21	22	24	24	28	30
Full Weight (kg)	111	134	130	158	160	182	185	228	273
Standing Heat Loss (kWh/24h)	1.61	1.70	1.70	1.80	1.80	1.87	1.86	2.04	2.16
Standing loss (W)	67	71	71	75	75	78	78	85	90
ERP Rating	C	C	C	C	C	C	C	C	C
Actual capacity (L)	94	115	112	137	138	158	161	200	243
Max working head (Mtrs)	10	10	10	10	10	10	10	10	10
Reheat time 10°C to 60°C (mins)	25	25	25	27	27	30	33	38	42
Insulation thickness (mm)	40	40	40	40	40	40	40	40	40



T: 01952 257961  
F: 01952 253452

E: sales@telford-group.com  
W: www.telford-group.com