



# X60 basin mono mixer - mini

complete with ceramic cartridge & flexible tails  
suitable for both high & low pressure applications  
flow regulator can be added to control water usage & comply with BREEAM



X60 Basin Mono Mixer - Mini Inc Click Clack Waste

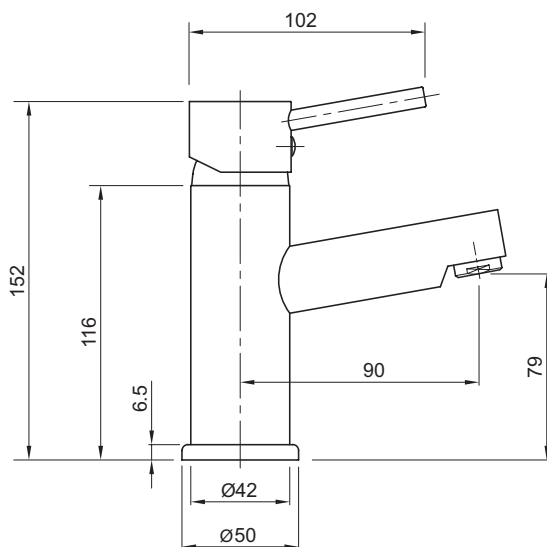

## to specify/order:

Please use the product reference shown below.

## X60 basin mono mixer - mini

X60 Basin Mono Mixer - Mini

Inc Click Clack Waste

**X605122CP**

4 LPM Flow regulator

**XS9004XX**

## finish

Chrome plated CP.

## approvals

WRAS Approved

## standards

Chrome plated to BS EN248

## system requirements

Can be installed on any system

## recommended operating pressure

Minimum operating pressure 0.2 bar.

Maximum operating pressure 5 bar.

## note

Maximum surface thickness to fit tap is 44mm. Easy fit clicker waste (slotted) included. Attached using 'C' plate fixing kit included.



## Deck Mounted Mini Basin Mixer – X605122CP

Flow Rate (Litres per minute)	0.2 Bar	0.5 Bar	1.0 Bar	2.0 Bar	3.0 Bar	5.0 Bar
Standard Mixed	4.0	6.6	9.0	13.2	16.2	21.2
Flow Limiter Fitted (Part No:XS9004XX)	2.9	4.9	6.10	6.60	7.10	7.80

All measurements shown are in millimetres. Drawing sizes are not to scale.



Hotels



Commercial



Residential

**Twyford**  
Geberit Group

**236**