


sola thermostatic surgeons mixer infrared

removable spout version suitable for autoclaving
self draining spout with smooth internals
24 hour automatic hygiene flush (flow time 60 seconds)



Detachable spout

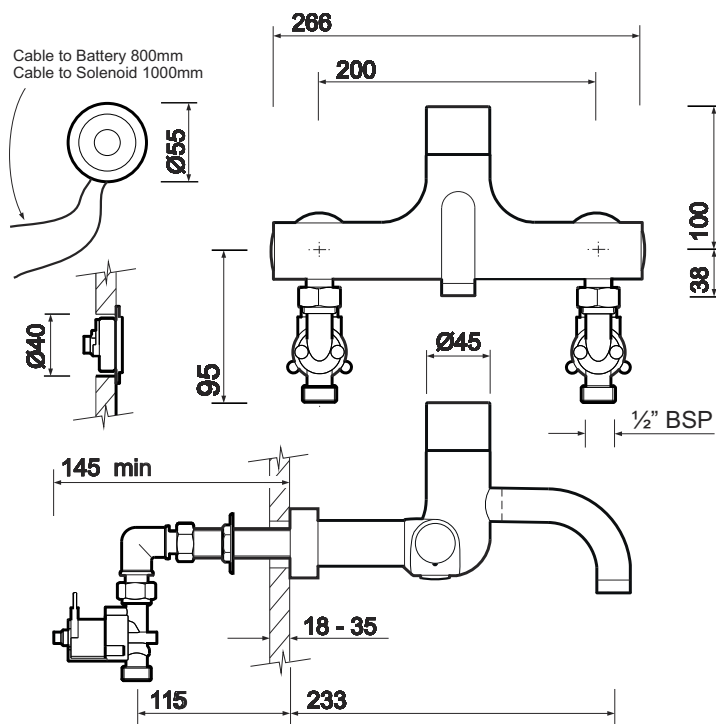

to specify/order:

Please use the product reference shown below.

sola thermostatic wall mounted surgeons mixer, infrared, including

Fixed spout	SF1129CP
Detachable spout	SF1130CP
Electric 240v conversion kit	SF1020CP

finish

Chrome plated CP

approvals

BREEAM compliant
TMV3
WRAS Approved
HBN 00-10 C, code TB H6



recommended operating pressure

Minimum operating pressure 1 bar.
Maximum static pressure 12 bar.
Maximum dynamic pressure 5 bar.

available accessories

Flushing kit	SF0115XX
Filter housing removal tool	SF0116XX
Removable spout	SF0117CP
Nozzle outlet	SF0118CP

additional features

- Infrared operation, wave on/off with 60 second pre-set flow times
- Cool touch body
- One piece thermostatic cartridge
- Compliant to HTM0401, PRH8941.0.6, HBN00.09
- Built in pasteurisation facility
- Isolation valves, check valves & filters front accessible



Infra Red Surgeons Mixer – SF1129CP & SF1130CP

Flow Rate (Litres per minute)	1 Bar	2 Bar	3 Bar	4 Bar	5 Bar
With Flow Regulators Fitted	4.1	4.6	5.1	6	6

All measurements shown are in millimeters. Drawing sizes are not to scale.



Healthcare



Commercial

Twyford
Geberit Group

237